elica

4.3

Cappe/ Soffitto

Hoods/Ceiling

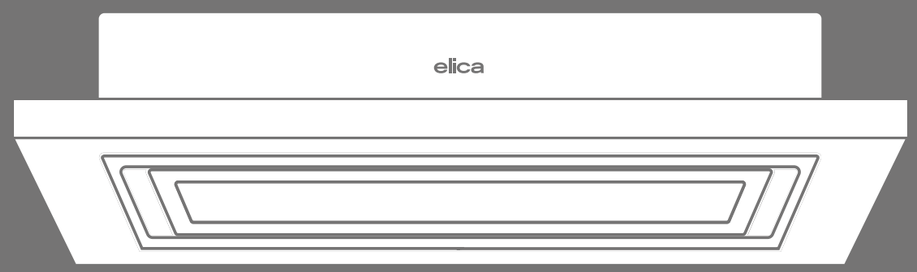

Queste cappe sono progettate per scomparire letteralmente nel soffitto, per un effetto visivo wow. Per questo necessitano di un controsoffitto in cartongesso che ospiti condotto, ventola e parte del sistema aspirante.

These hoods are designed to literally disappear into the ceiling, for that “wow” effect. For this reason, they require a plasterboard false ceiling to house duct, fan and some parts of the extraction system.

elica

Lullaby

Design Fabrizio Crisà

Contenuti aggiuntivi
More info

AWARDS

CLASSE ENERGETICA ENERGY CLASS	A
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas 100 cm
	Induzione/Radiante Induction/Radiant 60 cm

MATERIALI & DIMENSIONI
SIZE & MATERIALS

120×65 cm

96×47 cm (cut per controsoffitto)
(false ceiling cut)

Aspirante/Filtrante
Duct-out/Filtering

WH WOOD: legno laccato bianco + acciaio inox
WOOD: rovere naturale + bianco effetto soft touch
WH WOOD: white lacquered wood + stainless steel
WOOD: natural oak + White soft touch effect

Stile, dimensioni e ripiani aggiuntivi possono essere personalizzati a seconda dei vostri desideri. Due le scelte per i materiali: rovere naturale e legno laccato bianco, per un look&feel più naturale o moderno. Il pannello a led da 28 watt garantisce una diffusione della luce uniforme, che può essere regolata a piacere anche quando la cappa è spenta. La potenza aspirante si combina a una silenziosità inedita, grazie ai filtri di nuova generazione rigenerabili (che possono durare fino a 5 anni). È attivabile tramite telecomando o con comandi voice control, grazie alla connessione Wi-Fi.

Style, dimensions, and additional shelves can be customised according to your wishes. Available in natural oak or white lacquered wood, for either a more natural or contemporary look&feel. The 28-watt LED panel ensures uniform light distribution, which can also be adjusted as you like even when the hood is off. Its powerful extraction rate is matched by unparalleled silence, thanks to new-generation regenerable filters (that last up to 5 years). It can be enabled via remote control or with voice commands, thanks to its Wi-Fi connectivity.

Aspirante
Duct-out

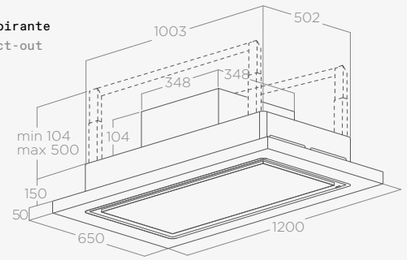

FALSE CEILING NEEDED
CUT 470X960

Filtrante
Filtering

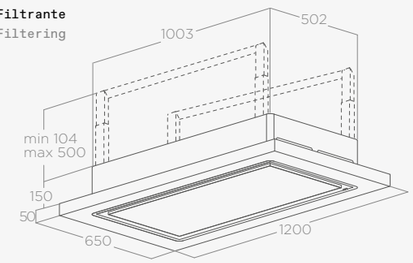

ILLUMINAZIONE
LIGHTING

Tipo Type	Led Panel 28W
Intensità Intensity	1683 LUX (Duct-out) - 1235 LUX (Filtering)
Temperatura Temperature	2700 - 5000 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Filtro in ceramica anti-odori rigenerabile HP incluso (*)
HP regenerable odour ceramic filter included (*)
Radiocomando incluso
Remote control included

FUNZIONI
FEATURES

- Long Life Filter
- Dim Light
- Long Life Filter ++
- Special Material
- Tune White
- Maintenance Alarm
- Comfort Silence
- Connectivity
- Delay Switch Off

PERFORMANCE
PERFORMANCE

	Aspirante Duct-out	Filtrante Filtering
Comandi Controls	Radiocomando 3V + 2I 3S + 2B Remote control	Radiocomando 3V + 2I 3S + 2B Remote control
Portata intensiva Booster airflow	770 m^3/h	470 m^3/h
Livello sonoro min-max Noise level min-max	40-53 db(A)	46-64 db(A)
Assorbimento totale Total absorption	298 W	568 W

ACCESSORI
ACCESSORIES

Filtro in ceramica anti-odori rigenerabile HP HP regenerable odour ceramic filter	KIT0147861A
Radiocomando Design bianco White Design remote control	KIT0121468
Radiocomando Design nero Black Design remote control	KIT0121469
Kit mensola bianca White shelf kit	KIT0147859
Kit mensola rovere Oak shelf kit	KIT0147858
Kit filtrante a bordo H30 On board filtering kit H30	KIT0148449
Kit filtrante high performance 1a inst. H16-H30 INOX High performance 1st inst. filtering kit H16-H30 INOX	KIT0148450A
Kit filtrante rigenerabile 1a inst. H16-H30 INOX Regenerable 1st inst. filtering kit H16-H30 INOX	KIT0167743
Kit filtrante high performance 1a inst. H16-H30 (BI) High performance 1st inst. filtering kit H16-H30 (WH)	KIT0181126
Kit filtrante rigenerabile 1a inst. H16-H30 (BI) Regenerable 1st inst. filtering kit H16-H30 (WH)	KIT0181117

MODELLI
MODELS

LULLABY @ WOOD/A/120	PRF0167046
LULLABY @ WOOD/F/120 (*)	PRF0167047
LULLABY @ WH WOOD/A/120	PRF0167048
LULLABY @ WH WOOD/F/120 (*)	PRF0167049

Modello non soggetto a certificazione energetica obbligatoria. (*)
Model not subject to compulsory energy certification. (*)

elica

Showcasing

Lullaby

Skydome

Design Fabrizio Crisà

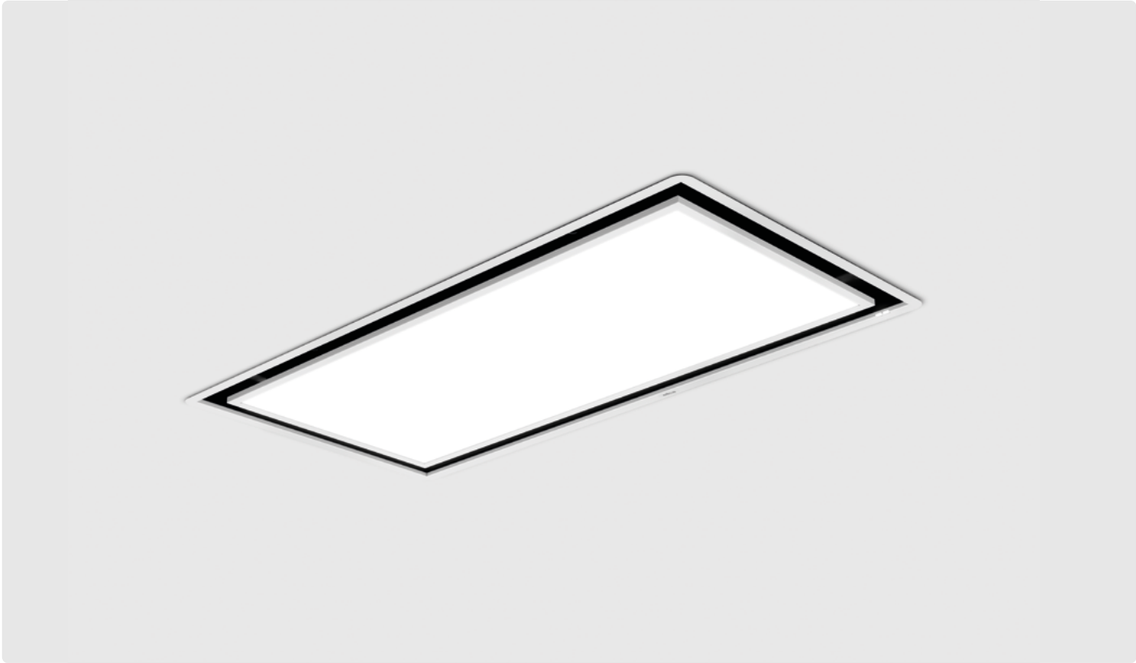

Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
H16	100 cm	65 cm
H30	100 cm	60 cm

MATERIALI & DIMENSIONI
SIZE & MATERIALS

100×50 cm

98×48 cm (cut per controsoffitto)
(false ceiling cut)

Aspirante
Duct-out

Cornice bianca
White frame

Questa cappa incarna un autentico progetto di illuminazione, che cela in modo intelligente il sistema aspirante. Le prestazioni sono altamente performanti anche a una distanza significativa dal piano cottura, garantendo sempre silenziosità. Il pannello a led da 28 watt garantisce una diffusione della luce ottimale, anche quando la funzione aspirante è disattivata. La connessione wi-fi permette di regolarla via app o assistente vocale. Inoltre, questa cappa presenta un'alta versatilità di installazione: la versione super slim misura solo 16 cm. È dotata di telecomando ed è disponibile nelle versioni aspirante e filtrante.

This hood doubles as a lighting solution brilliantly designed to conceal the extraction system. This quiet yet powerful hood delivers exceptional performance even at a considerable distance from the hob. The 28-watt LED panel guarantees optimal light distribution, even when the extractor is off. The Wi-Fi connectivity allows you to adjust its settings via an app or voice assistant. Moreover, this hood offers versatile installation options: the super slim model measures only 16 cm. It comes with a remote control and is available in duct-out or filtering modes. It comes with a remote control.

H16 - No motor

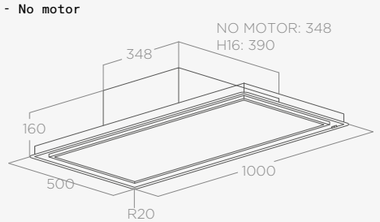

FALSE CEILING CUT: 480X980

H30

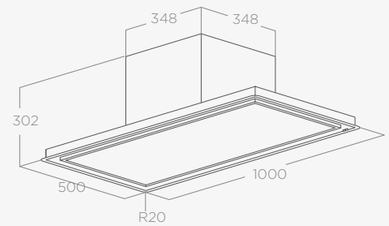

FALSE CEILING CUT: 480X980

ILLUMINAZIONE
LIGHTING

Tipo Type	Led Panel 28W
Intensità Intensity	1459 LUX
Temperatura Temperature	2700 - 5000 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Radiocomando incluso
Remote control included

FUNZIONI
FEATURES

- Long Life Filter
- Dim Light
- Long Life Filter ++
- Total Integration
- Tune White
- Maintenance Alarm
- Comfort Silence
- Airmatic
- Connectivity
- Delay Switch Off
- Brushless
- Super Easy Installation

PERFORMANCE
PERFORMANCE

Comandi Controls	Radiocomando 3V + 2I 3S + 2B Remote control	
	H16	H30
Portata intensiva Booster airflow	720 m³/h	770 m³/h
Livello sonoro min-max Noise level min-max	51-68 db(A)	40-53 db(A)
Assorbimento totale Total absorption	303 W	298 W

ACCESSORI
ACCESSORIES

Kit filtrante a bordo H30 On board filtering kit H30	KIT0148449
Kit filtrante high performance 1a inst. H16-H30 INOX High performance 1st inst filtering kit H16-H30 INOX	KIT0148450A
Kit filtrante rigenerabile 1a inst. H16-H30 INOX Regenerable 1st inst. filtering kit H16-H30 INOX	KIT0167743
Kit filtrante high performance 1a inst. H16-H30 (BI) High performance 1st inst filtering kit H16-H30 (WH)	KIT0181126
Kit filtrante rigenerabile 1a inst. H16-H30 (BI) Regenerable 1st inst. filtering kit H16-H30 (WH)	KIT0181117
Radiocomando Design bianco White Design remote control	KIT0121468
Radiocomando Design nero Black Design remote control	KIT0121469
Motore remoto interno Internal remote motor	KIT0184296
Motore remoto esterno (muro) External remote motor (wall)	KIT0184135
Motore remoto esterno (tetto) External remote motor (roof)	KIT0147881
Motore remoto esterno (tetto inclinato) External remote motor (inclined roof)	KIT0147882
Cavo Prolunga motore remoto Extension lead for remote motor	KIT0161392

MODELLI
MODELS

SKYDOME NO MOTOR A/100	PRF0146230A
SKYDOME H16 A/100	PRF0147735B
SKYDOME H30 A/100	PRF0146232B

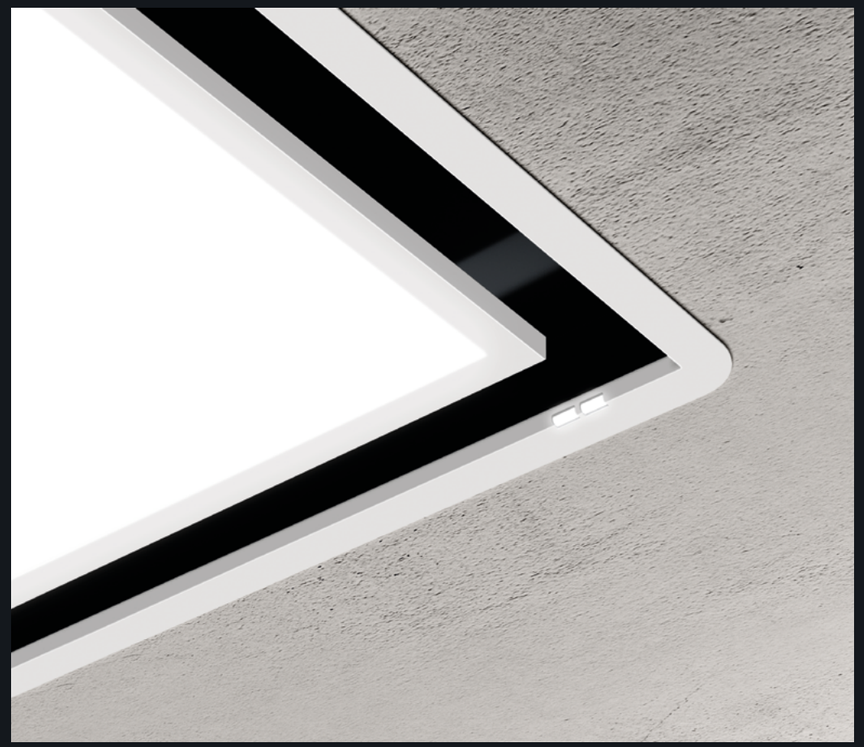

Showcasing

Skydome

Illusion

Design Fabrizio Crisà

Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
H16	70 cm	65 cm
H30	70 cm	60 cm

MATERIALI & DIMENSIONI
SIZE & MATERIALS

100×50 cm

98×48 cm (cut per controsoffitto)
(false ceiling cut)

Aspirante
Duct-out

Bianco effetto soft touch + cornice bianca soft touch, rivestibile con cartongesso (non incluso) + cornice acciaio inox, nero effetto soft touch + cornice nera soft touch
White soft touch effect + white soft touch frame, coverable with drywall (not included) + stainless steel frame, black soft touch effect + black soft touch frame

Aria più pura, comandi Wi-Fi.
Progettata per mimetizzarsi in ogni contesto, questa cappa è la soluzione ideale anche per i piccoli ambienti perché libera lo spazio sopra al piano di cottura. È disponibile nelle versioni bianca, nera o con cornice in acciaio inox e pannello personalizzabile con cartongesso della stessa finitura del soffitto, integrandosi così a ogni stile di cucina. L'illuminazione è regolabile per intensità e tono della luce (dal più caldo al più freddo); il cuore aspirante elimina fumi e odori dalla cucina durante tutto l'arco della giornata. Un sensore intelligente rileva vapori di cottura e sostanze nocive (come solventi di pulizia o fumo di sigaretta) e si attiva impostando automaticamente la potenza di aspirazione più adatta. Quando l'aria è tornata ottimale si spegne da sola. I filtri sono rigenerabili e possono durare fino a 3 anni, abbattendo l'impatto ambientale. Last but not least, Illusion dispone di connessione Wi-Fi che le consente di dialogare con voi da app.

Cleaner air, Wi-Fi controls. Designed to blend into any 'setting', this hood is the ideal solution for small spaces because it frees up space above the hob. Available in white, black, or with a stainless steel frame and a customisable plasterboard panel to match the ceiling's finish, it complements any kitchen style. The light intensity and temperature (from warmer to cooler tones) are adjustable; the extraction core removes smoke and odors from the kitchen all day long. A smart sensor detects cooking fumes and harmful substances (e.g. cleaning agents or cigarette smoke) and activates, automatically setting the most suitable extraction power. When the air quality has returned to an ideal level, it automatically switches off. The filters are regenerable and can last up to 3 years, thereby reducing the environmental impact. Last but not least, Illusion is equipped with Wi-Fi connectivity, allowing it to communicate with you via an app.

H16 - No motor

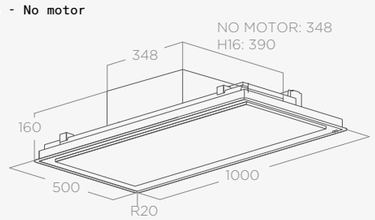

H30

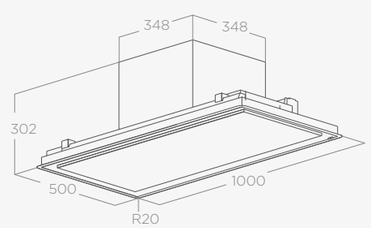

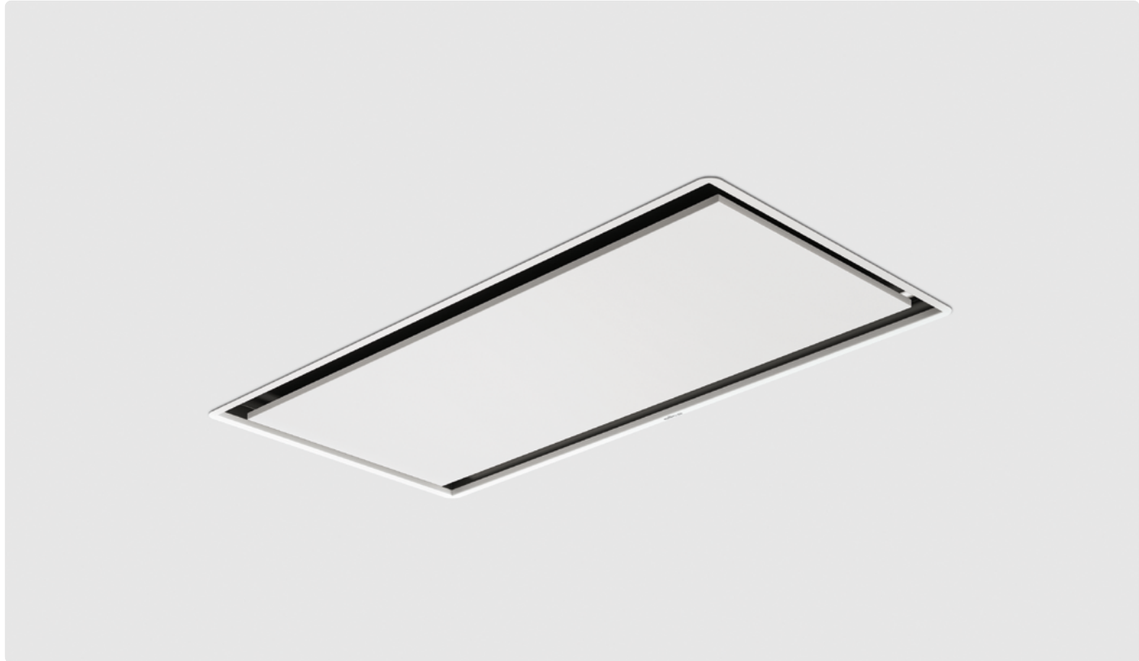

ILLUMINAZIONE
LIGHTING

Tipo Type	Strip Led 2×14 W
Intensità Intensity	563 LUX
Temperatura Temperature	2700 - 5000 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Radiocomando incluso
Remote control included

FUNZIONI
FEATURES

- Long Life Filter
- Dim Light
- Long Life Filter ++
- Total Integration
- Tune White
- Maintenance Alarm
- Comfort Silence
- Airmatic
- Connectivity
- Delay Switch Off
- Brushless
- Super Easy Installation

PERFORMANCE
PERFORMANCE

Comandi Controls	Radiocomando 3V + 2I 3S + 2B Remote control	
	H16	H30
Portata intensiva Booster airflow	720 m^3/h	770 m^3/h
Livello sonoro min-max Noise level min-max	51-68 db(A)	40-53 db (A
Assorbimento totale Total absorption	303 W	298 W

ACCESSORI
ACCESSORIES

Kit filtrante a bordo H30 On board filtering kit H30	KIT0148449
Kit filtrante high performance 1a inst. H16-H30 INOX High performance 1st inst filtering kit H16-H30 INOX	KIT0148450A
Kit filtrante rigenerabile 1a inst. H16-H30 INOX Regenerable 1st inst. filtering kit H16-H30 INOX	KIT0167743
Kit filtrante high performance 1a inst. H16-H30 (BI) High performance 1st inst filtering kit H16-H30 (WH)	KIT0181126
Kit filtrante rigenerabile 1a inst. H16-H30 (BI) Regenerable 1st inst. filtering kit H16-H30 (WH)	KIT0181117
Kit filtrante high performance 1a inst. H16-H30 (NE) High performance 1st inst filtering kit H16-H30 (BL)	KIT0181124
Kit filtrante rigenerabile 1a inst. H16-H30 (NE) Regenerable 1st inst. filtering kit H16-H30 (BL)	KIT0180993
Radiocomando Design bianco White Design remote control	KIT0121468
Radiocomando Design nero Black Design remote control	KIT0121469
Mot.remoto interno Internal remote motor	KIT0184296
Mot.remoto esterno (muro) External remote motor (wall)	KIT0184135
Mot.remoto esterno (tetto) External remote motor (roof)	KIT0147881
Mot.remoto esterno (tetto inclinato) External remote motor (inclined roof)	KIT0147882
Cavo Prolunga mot.remoto Extension lead for remote motor	KIT0161392

MODELLI
MODELS

ILLUSION NO MOTOR PAINT/A/100	PRF0146252A
ILLUSION H16 PAINT/A/100	PRF0147726B
ILLUSION H30 PAINT/A/100	PRF0146250B
ILLUSION NO MOTOR WH/A/100	PRF0146253A
ILLUSION H16 WH/A/100	PRF0147727B
ILLUSION H30 WH/A/100	PRF0146251B
ILLUSION NO MOTOR BL MAT/A/100	PRF0172647A
ILLUSION H16 BL MAT/A/100	PRF0172645B
ILLUSION H30 BL MAT/A/100	PRF0172646B

Showcasing

Illusion

elica

Hilight Glass

Design Fabrizio Crisà

Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
H16	70 cm	65 cm
H30	70 cm	60 cm

MATERIALI & DIMENSIONI
SIZE & MATERIALS

100×57 cm

98×55 cm (cut per controsoffitto)
(false ceiling cut)

Aspirante
Duct-out

Vetro bianco + cornice bianca
White glass + white frame

È dotata di filtri anti-odore che possono durare fino a 3 anni, riducendo l'impatto ambientale. Una spia luminosa avverte quando è il momento di lavarli, rigenerarli o sostituirli. Due strisce LED da 14 watt, dotate di regolazione dei toni e della luminosità, vi garantiscono sempre un'atmosfera perfetta e trasformano questa cappa in un autentico hub di illuminazione, regolabile con telecomando smart. La versione super slim si adatta anche alle installazioni più complesse grazie alla sua dimensione compatta, fino a 16 cm.

The hood is equipped with odour filters that can last up to 3 years, reducing environmental impact. An indicator light warns you when it is time to wash, regenerate or replace them. The two colour temperature adjustable 14-watt LED strips allow you to create the perfect atmosphere, turning this hood into a genuine lighting hub, which can be adjusted via a smart remote. The super slim model is suitable for even the most complex installations, thanks to its compact size, down to 16 cm.

H16 - No motor

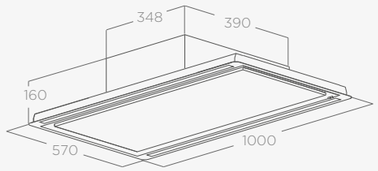

FALSE CEILING CUT: 550X980

H30

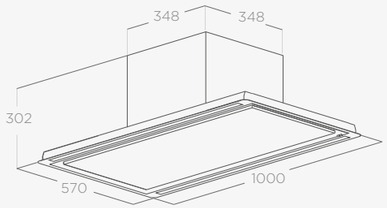

FALSE CEILING CUT: 550X980

ILLUMINAZIONE
LIGHTING

Tipo Type	Strip Led 2×14 W
Intensità Intensity	563 LUX
Temperatura Temperature	2700 - 5000 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Radiocomando incluso
Remote control included

FUNZIONI
FEATURES

- Long Life Filter
- Dim Light
- Long Life Filter ++
- Total Integration
- Tune White
- Maintenance Alarm
- Comfort Silence
- Delay Switch Off
- Super Easy Installation

PERFORMANCE
PERFORMANCE

Comandi Controls	Radiocomando 3V + 2I 3S + 2B Remote control	
	H16	H30
Portata intensiva Booster airflow	720 m³/h	770 m³/h
Livello sonoro min-max Noise level min-max	51-68 db(A)	40-53 db(A)
Assorbimento totale Total absorption	303 W	298 W

ACCESSORI
ACCESSORIES

Kit filtrante a bordo H30 On board filtering kit H30	KIT0148449
Kit filtrante high performance 1a inst. H16-H30 INOX High performance 1st inst filtering kit H16-H30 INOX	KIT0148450A
Kit filtrante rigenerabile 1a inst. H16-H30 INOX Regenerable 1st inst. filtering kit H16-H30 INOX	KIT0167743
Kit filtrante high performance 1a inst. H16-H30 (BI) High performance 1st inst filtering kit H16-H30 (WH)	KIT0181126
Kit filtrante rigenerabile 1a inst. H16-H30 (BI) Regenerable 1st inst. filtering kit H16-H30 (WH)	KIT0181117
Radiocomando Design bianco White Design remote control	KIT0121468
Radiocomando Design nero Black Design remote control	KIT0121469
Mot.remoto interno Internal remote motor	KIT0184296
Mot.remoto esterno (muro) External remote motor (wall)	KIT0184135
Mot.remoto esterno (tetto) External remote motor (roof)	KIT0147881
Mot.remoto esterno (tetto inclinato) External remote motor (inclined roof)	KIT0147882
Cavo Prolunga mot.remoto Extension lead for remote motor	KIT0161392

MODELLI
MODELS

HILIGHT GLASS NO MOTOR WH/A/100	PRF0146248
HILIGHT GLASS H16 WH/A/100	PRF0167044A
HILIGHT GLASS H30 WH/A/100	PRF0146246A

Hilight-X

Design Fabrizio Crisà

Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A+ (H16) - A (H30)	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
H16	70 cm	65 cm
H30	70 cm	60 cm

MATERIALI & DIMENSIONI
SIZE & MATERIALS

100×57 cm

98×55 cm (cut per controsoffitto)
(false ceiling cut)

Aspirante
Duct-out

Acciaio inox, bianco effetto soft touch, nero effetto soft touch
Stainless steel, white soft touch effect, black soft touch effect

È dotata di filtri anti-odore che possono durare fino a 3 anni, riducendo l'impatto ambientale. Una spia luminosa vi avverte quando è il momento di lavarli, rigenerarli o sostituirli. Due strisce LED da 14 watt, dotate di regolazione dei toni e della luminosità, vi garantiscono sempre un'atmosfera perfetta e trasformano questa cappa in un autentico hub di illuminazione, regolabile con telecomando smart. La versione super slim si adatta anche alle installazioni più complesse grazie alla sua dimensione compatta, fino a 16 cm.

The hood is equipped with odour filters that can last up to 3 years, reducing environmental impact. An indicator light warns you when it is time to wash, regenerate, or replace them. The two colour temperature adjustable 14-watt LED strips allow you to create the perfect atmosphere, turning this hood into a genuine lighting hub, which can be adjusted via a smart remote. The super slim model is suitable for even the most complex installations, thanks to its compact size, down to 16 cm.

H16 - No motor

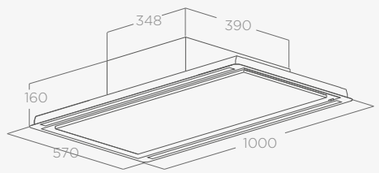

FALSE CEILING CUT: 550X980

H30

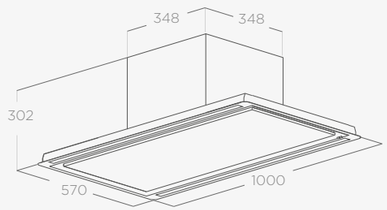

FALSE CEILING CUT: 550X980

ILLUMINAZIONE
LIGHTING

Tipo Type	Strip Led 2×7 W
Intensità Intensity	281 LUX (H16) - 563 LUX (H30)
Temperatura Temperature	3500 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Radiocomando incluso
Remote control included

FUNZIONI
FEATURES

- Long Life Filter
- Dim Light
- Long Life Filter ++
- Total Integration
- Delay Switch Off
- Maintenance Alarm
- Comfort Silence
- Brushless
- Super Easy Installation

PERFORMANCE
PERFORMANCE

Comandi Controls	Radiocomando 3V + 2I 3S + 2B Remote control	
	H16	H30
Portata intensiva Booster airflow	720 m³/h	770 m³/h
Livello sonoro min-max Noise level min-max	51-68 db(A)	42-58 db(A)
Assorbimento totale Total absorption	189 W	184 W

ACCESSORI
ACCESSORIES

Kit filtrante a bordo H30 On board filtering kit H30	KIT0148449
Kit filtrante high performance 1a inst. H16-H30 INOX High performance 1st inst filtering kit H16-H30 INOX	KIT0148450A
Kit filtrante rigenerabile 1a inst. H16-H30 INOX Regenerable 1st inst. filtering kit H16-H30 INOX	KIT0167743
Kit filtrante high performance 1a inst. H16-H30 (BI) High performance 1st inst filtering kit H16-H30 (WH)	KIT0181126
Kit filtrante rigenerabile 1a inst. H16-H30 (BI) Regenerable 1st inst. filtering kit H16-H30 (WH)	KIT0181117
Kit filtrante high performance 1a inst. H16-H30 (NE) High performance 1st inst filtering kit H16-H30 (BL)	KIT0181124
Kit filtrante rigenerabile 1a inst. H16-H30 (NE) Regenerable 1st inst. filtering kit H16-H30 (BL)	KIT0180993
Radiocomando Design bianco White Design remote control	KIT0121468
Radiocomando Design nero Black Design remote control	KIT0121469
Mot.remoto interno Internal remote motor	KIT0184296
Mot.remoto esterno (muro) External remote motor (wall)	KIT0184135
Mot.remoto esterno (tetto) External remote motor (roof)	KIT0147881
Mot.remoto esterno (tetto inclinato) External remote motor (inclined roof)	KIT0147882
Cavo Prolunga mot.remoto Extension lead for remote motor	KIT0161392

MODELLI
MODELS

HILIGHT-X NO MOTOR IX/A/100	PRF0163523
HILIGHT-X H16 IX/A/100	PRF0167045A
HILIGHT-X H30 IX/A/100	PRF0163520A
HILIGHT-X H16 WH/A/100	PRF0173442A
HILIGHT-X H30 WH/A/100	PRF0173444A
HILIGHT-X H16 BL MAT/A/100	PRF0173443A
HILIGHT-X H30 BL MAT/A/100	PRF0173445A

Cloud Seven

Design Fabrizio Crisà

Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	70 cm	60 cm

MATERIALI & DIMENSIONI
SIZE & MATERIALS

90×50 cm

88×48 cm (cut per controsoffitto)
(false ceiling cut)

Aspirante/Filtrante
Duct-out/Filtering

Acciaio inox + bianco
Stainless steel + white

Questo elettrodomestico è una cappa in acciaio Plug&Play, facile da installare, con aspirazione perimetrale e illuminazione a led. Libera lo spazio intorno e sopra il piano cottura, garantendo una rimozione ultra efficace di fumi, odori, allergeni. Riconoscibile per le sue linee compatte e lineari, è disponibile nelle versioni aspirante e filtrante.

This appliance is a Plug&Play steel hood, easy to install, equipped with perimeter extraction and LED lighting. It frees the space above and around the hob, while ensuring ultra-effective removal of smoke, odours, and allergens. Notable for its compact and straight lines, it is available in both duct-out and filtering versions.

Aspirante
Duct-out

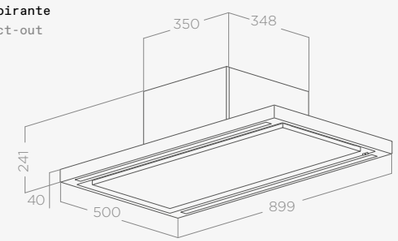

FALSE CEILING CUT: 480X880

Filtrante
Filtering

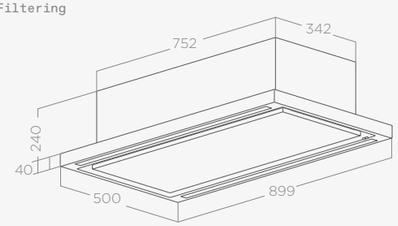

ILLUMINAZIONE
LIGHTING

Tipo Type	Strip Led 2×7 W
Intensità Intensity	393 LUX
Temperatura Temperature	3500 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Filtro carbone rigenerabile incluso (*)
Regenerable charcoal filter included (*)
Radiocomando incluso
Remote control included

FUNZIONI
FEATURES

Long Life Filter
Long Life Filter ++
Delay Switch Off
Maintenance Alarm

PERFORMANCE
PERFORMANCE

	Aspirante Duct-out	Filtrante Filtering
Comandi Controls	Radiocomando 3V + 2I 3S + 2B Remote control	Radiocomando 3V + I 3S + B Remote control
Portata intensiva Booster airflow	770 m³/h	570 m³/h
Livello sonoro min-max Noise level min-max	43-60 db(A)	52-68 db(A)
Assorbimento totale Total absorption	284 W	214 W

ACCESSORI
ACCESSORIES

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0140426
Filtro carbone rigenerabile per kit estetico Regenerable charcoal filter (filtering kit)	KIT0168748
Filtro carbone high performance per kit estetico Regenerable charcoal filter high performance (filtering kit)	KIT0168749
Kit filtrante high performance 1a inst. H16-H30 INOX High performance 1st inst filtering kit H16-H30 INOX	KIT0148450A
Kit filtrante rigenerabile 1a inst. H16-H30 INOX Regenerable 1st inst. filtering kit H16-H30 INOX	KIT0167743
Kit filtrante high performance 1a inst. H16-H30 (BI) High performance 1st inst filtering kit H16-H30 (WH)	KIT0181126
Kit filtrante rigenerabile 1a inst. H16-H30 (BI) Regenerable 1st inst. filtering kit H16-H30 (WH)	KIT0181117
Radiocomando Design bianco White Design remote control	KIT0121468
Radiocomando Design nero Black Design remote control	KIT0121469

MODELLI
MODELS

CLOUD SEVEN IX/F/90 (*)	PRF0141953
CLOUD SEVEN IX/A/90	PRF0142094A

elica

Showcasing

Cloud Seven

4.3

Sistema S.E.I.
S.E.I. System.

Grazie al sistema brevettato Super Easy Installation bastano pochi e semplici passaggi per montare il prodotto. Assicurando sicurezza e integrità della controsoffittatura.

This appliance is quick and easy to install thanks to the patented Super Easy Installation system, which also ensures the safety and integrity of the false ceiling.

Avvicinare il prodotto al vano nel controsoffitto.
Bring the product to the compartment in the false ceiling.



Spingere il prodotto nell'apertura praticata.
Insert the product into the opening.



Le staffe bloccano il prodotto nel controsoffitto.
The brackets hold the product in the false ceiling.

Stringere le viti per il definitivo fissaggio del prodotto.
Tighten the screws to secure the product.



Disponibile per i modelli: Illusion, Skydome, Hilight Glass e Hilight-X. Available for models: Illusion, Skydome, Hilight Glass and Hilight-X.

Installazione Salvaspazio
Space-saving Installation

Il potente cuore aspirante rimane integrato nel controsoffitto e assicura un'elevata captazione dei fumi. Nate per essere installate ovunque, queste cappe Elica si adattano perfettamente anche ai soffitti meno alti: sono infatti disponibili in duplice altezza, da 30 cm o da 16 cm.

The powerful extraction core is tucked into the false ceiling, providing an exceptional fume capture capacity. These Elica hoods are designed to be installed anywhere, even in lower ceilings as they are available in two heights: 30 cm or 16 cm.

Installazione H30
H30 Installation



Installazione H16
H16 Installation



Accessori luce.
Lighting accessories.

È possibile regolare il livello di luminosità e la tonalità di bianco preferita, in base al momento della giornata o delle proprie necessità. Una luce più fredda è perfetta mentre si cucina; una luce più calda crea un'atmosfera più intima e accogliente.

Come un vero e proprio lampadario, la cappa può essere comandata con un interruttore a parete o con un telecomando, che potrà essere appeso alla parete grazie a un magnete.

Inoltre, le cappe a soffitto di Elica possono essere collegate a qualsiasi tipo di lampada accessoria disponibile sul mercato azionabile attraverso i comandi della cappa stessa.

In most models (Lullaby, Illusion, Skydome en Hilight Glass), you can adjust the brightness and the hue of white to suit the time of day or your needs. Cool white light is perfect for cooking; warm white light creates a warm and cozy atmosphere.

Like a proper chandelier, you can operate the hood via a wall switch or a remote control, which can be attached to the wall thanks to its magnet.

Furthermore, Elica ceiling hoods can be connected to any type of accessory lamp available on the market switchable with hoods controls.

4.3 Kit filtri carbone
Carbon Filters Kit

Kit filtrante prima installazione
First installation filtering kit

Da acquistare per convertire un modello aspirante in modalità filtrante.

Sold separately to convert a duct out model into filtering mode.

Kit filtrante High Performance
High Performance filtering kit

Contiene il filtro carbone rigenerabile high performance KIT0168749 e il pannello per l'uscita dell'aria.
It contains a regenerable high performance charcoal filter KIT0168749 and an air outlet panel.

KIT0148450A
Acciaio inox
Stainless steel

KIT0181124
Nero
Black

KIT0181126
Bianco
White

Kit filtrante Rigenerabile
Regenerable filtering kit

Contiene il filtro carbone rigenerabile KIT0168748 e il pannello per l'uscita dell'aria.
It contains a regenerable high performance charcoal filter KIT0168748 and an air outlet panel.

KIT0167743
Acciaio inox
Stainless steel

KIT0180993
Nero
Black

KIT0181117
Bianco
White

Kit filtrante "A bordo" H30
"On board" filtering kit H30

Kit di filtri da utilizzare solo per installazioni H30 – contiene 3 filtri da montare direttamente sul prodotto.
Filtering Kit only to be used for H30 installations - comes with 3 filters to be fitted directly on the product.



KIT0148449

KIT0148450A
KIT0181124
KIT0181126
KIT0167743
KIT0180993
KIT0181117

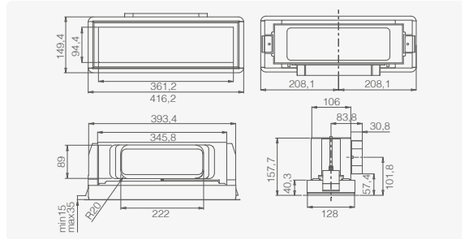

Ricambi per filtri antiodore rigenerabili
Spare parts for regenerable odour filters

Da acquistare se si è già in possesso di un modello filtrante.

To be purchased if you have a filtering hood.

KIT0147861A
Filtro in ceramica anti-odori
Ceramic odour filter



CFC0140426
Filtro carbone rigenerabile
Regenerable charcoal filter



KIT0148449
Kit filtrante a bordo H30
Filtering kit H30

KIT0168748
Filtro carbone rigenerabile
Regenerating carbon filter



KIT0168749
Filtro carbone high performance
High Performance carbon filter

	EFFICIENZA DI FILTRAGGIO FILTERING EFFICIENCY	SKYDOME	HILIGHT GLASS	HILIGHT-X	ILLUSION	LULLABY Aspirante Duct-out	LULLABY Filtrante Filtering	CLOUD SEVEN Aspirante Duct-out	CLOUD SEVEN Filtrante Filtering
KIT0148450A KIT0181124 KIT0181126	80%	X	X	X	X	X	---	X	---
KIT0167743 KIT0180993 KIT0181117	60%	X	X	X	X	X	---	X	---
KIT0148449	60%	---	---	---	---	X	---	---	---
KIT0168749	80%	X	X	X	X	X	---	X	---
CFC0140426	60%	---	---	---	---	---	---	---	X
KIT0168748	60%	X	X	X	X	X	---	X	---
KIT0147861A	80%	---	---	---	---	---	X	---	---

4.3 Accessori Ceiling.
Ceiling Accessories.

Lullaby - Mensole Arredo
Lullaby - Decorative Shelves

KIT0147858
Legno
Wood



KIT0147859
Bianco
White



Disegni tecnici.
Technical drawings.

Cloud Seven
Aspirante Duct-out

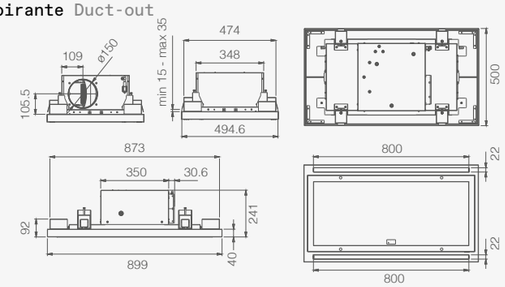

Cloud Seven
Filtrante Filtering

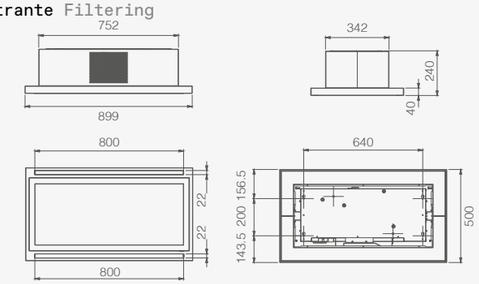

Hilight Glass / Hilight-X
H16

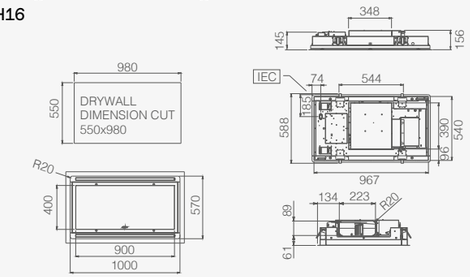

Hilight Glass / Hilight-X
H30

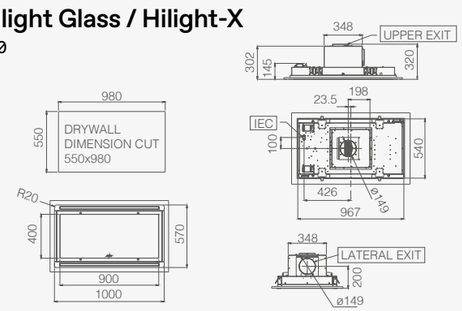

Hilight Glass / Hilight-X
NO MOTOR

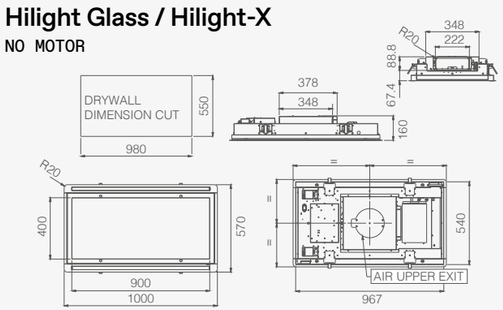

Illusion
H16

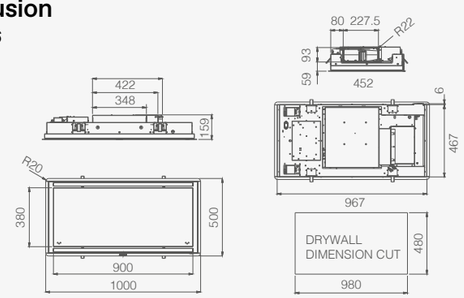

Illusion
H30

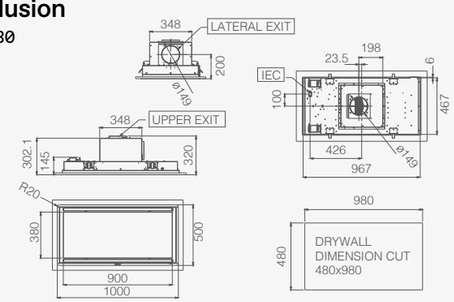

Illusion
NO MOTOR

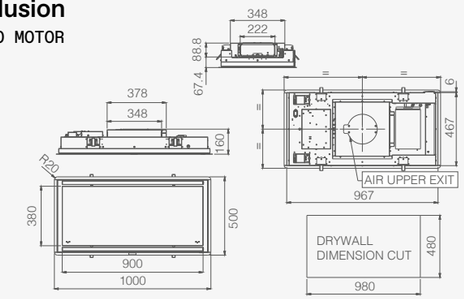

Lullaby
Aspirante Duct-out

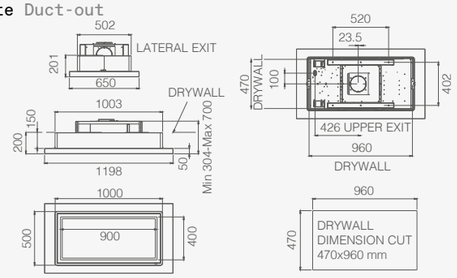

Lullaby
Filtrante Filtering

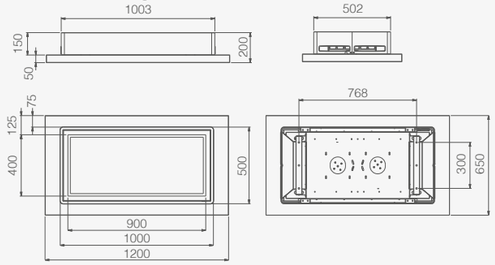

Skydome
H16

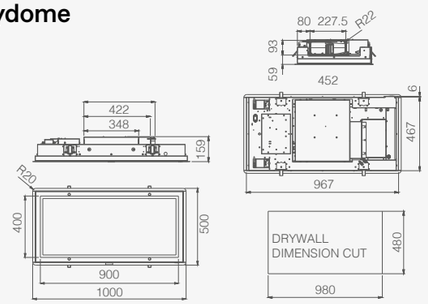

Skydome
H30

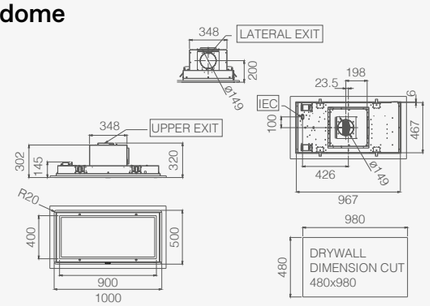

Skydome
NO MOTOR

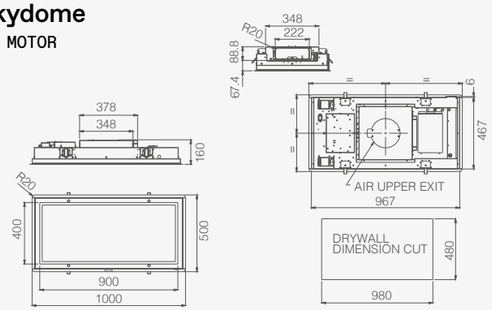

Tutto sulle performance.
Performance details.

	ENERGY CLASS	1 SPEED (AIRFLOW/NOISE)	2 SPEED (AIRFLOW/NOISE)	3 SPEED (AIRFLOW/NOISE)	4 SPEED * (AIRFLOW/NOISE)	5 SPEED * (AIRFLOW/NOISE)
Cloud Seven Duct-out	A	235 m³/h - 43 db(A)	330 m³/h - 54 db(A)	460 m³/h - 60 db(A)	660 m³/h - 68 db(A)	770 m³/h - 71 db(A)
Cloud Seven Filtering	A	240 m³/h - 52 db(A)	360 m³/h - 62 db(A)	495 m³/h - 68 db(A)	570 m³/h - 70 db(A)	---
Hilight Glass H16	A	275 m³/h - 51 db(A)	425 m³/h - 62 db(A)	540 m³/h - 68 db(A)	660 m³/h - 72 db(A)	720 m³/h - 74 db(A)
Hilight Glass H30	A	200 m³/h - 40 db(A)	380 m³/h - 50 db(A)	465 m³/h - 53 db(A)	690 m³/h - 63 db(A)	770 m³/h - 66 db(A)
Hilight-X H16	A+	275 m³/h - 51 db(A)	425 m³/h - 62 db(A)	540 m³/h - 68 db(A)	660 m³/h - 72 db(A)	720 m³/h - 74 db(A)
Hilight-X H30	A	200 m³/h - 42 db(A)	380 m³/h - 55 db(A)	465 m³/h - 58 db(A)	690 m³/h - 67 db(A)	770 m³/h - 70 db(A)
Illusion H16	A	275 m³/h - 51 db(A)	425 m³/h - 62 db(A)	540 m³/h - 68 db(A)	660 m³/h - 72 db(A)	720 m³/h - 74 db(A)
Illusion H30	A	200 m³/h - 40 db(A)	385 m³/h - 50 db(A)	465 m³/h - 53 db(A)	690 m³/h - 63 db(A)	770 m³/h - 66 db(A)
Lullaby Duct-out	A	200 m³/h - 40 db(A)	380 m³/h - 50 db(A)	465 m³/h - 53 db(A)	690 m³/h - 63 db(A)	770 m³/h - 66 db(A)
Lullaby Filtering	**	100 m³/h - 46 db(A)	155 m³/h - 55 db(A)	235 m³/h - 64 db(A)	380 m³/h - 74 db(A)	470 m³/h - 78 db(A)
Skydome H16	A	275 m³/h - 51 db(A)	425 m³/h - 62 db(A)	540 m³/h - 68 db(A)	660 m³/h - 72 db(A)	720 m³/h - 74 db(A)
Skydome H30	A	200 m³/h - 40 db(A)	380 m³/h - 50 db(A)	465 m³/h - 53 db(A)	690 m³/h - 63 db(A)	770 m³/h - 66 db(A)

Approfondimenti.
Learn more.

	AIR OUTLET	REDUCTION 150/125	ODOUR FILTER ALERT	GREASE FILTER ALERT	NON-RETURN VALVE
Cloud Seven	---	---	■	■	---
Hilight Glass H16/H30	---	---	■	■	---
Hilight-X H16/H30	---	---	■	■	---
Illusion H16/H30	---	---	■	■	---
Lullaby	---	---	■	■	---
Skydome H16/H30	---	---	■	■	---