

4.6

Cappe/
Incasso

Hoods/Built-in

Volete una cappa sottopensile, incassata, da inserire in una struttura in cartongesso? Tra le nostre proposte c'è senz'altro quella più adatta alla vostra cucina. E a voi.

In the market for an under-cabinet, built-in hood to fit into a plasterboard structure? Then, you are in the right place. We most definitely have the best model for your kitchen and you.



Boxin Advance Plus

Design Fabrizio Crisà



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A
-----------------------------------	---

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
---	--

Gas	57 cm
-----	-------


Induzione/Radiante Induction/Radiant	43 cm
---	-------

MATERIALI & DIMENSIONI SIZE & MATERIALS	
--	--

60 - 75 - 90 - 120 cm

Aspirante Duct-out	
-----------------------	--

Acciaio inox, nero effetto soft touch Stainless steel, black soft touch effect	
---	--

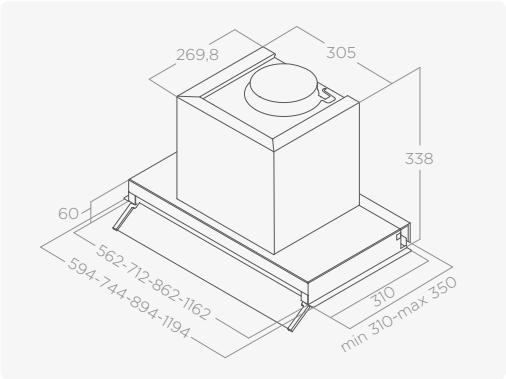

ILLUMINAZIONE LIGHTING	
---------------------------	--

Tipo Type	Strip Led 1x7 W
--------------	-----------------

Intensità Intensity	421 LUX (60cm, 75cm) - 365 LUX (90cm, 120cm)
------------------------	--

Temperatura Temperature	3500 K
----------------------------	--------

Filtro grassi alluminio incluso Aluminium grease filter included	
---	--

ACCESSORI ACCESSORIES	
--------------------------	--

Filtro carbone Charcoal filter	CFC0140343
-----------------------------------	------------

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
--	------------

Kit camino H18,5+18,5 Chimney kit H18,5+18,5	KIT0141458
---	------------

Kit camino H12 Chimney kit H12	KIT0091876
-----------------------------------	------------

Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617
---	------------

FUNZIONI FEATURES	
----------------------	--

- Long Life Filter
- Perimeter Aspiration
- Comfort Silence
- Dim Light
- Maintenance Alarm
- Connectivity
- Total Integration
- Delay Switch Off
- Multi Connection
- Airmatic
- Cabinet Protection
- Brushless

PERFORMANCE PERFORMANCE	
----------------------------	--

Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
---------------------	---

Portata intensiva Booster airFlow	640 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	45-57 db(A)
---	-------------

Assorbimento totale Total absorption	177 W
---	-------

MODELLI MODELS	
-------------------	--

BOXIN ADV PLUS @ IX/A/60	PRF0191539
--------------------------	------------

BOXIN ADV PLUS @ IX/A/75	PRF0195605
--------------------------	------------

BOXIN ADV PLUS @ IX/A/90	PRF0195520
--------------------------	------------

BOXIN ADV PLUS @ IX/A/120	PRF0195342
---------------------------	------------

BOXIN ADV PLUS @ BLMAT/A/60	PRF0199290
-----------------------------	------------

BOXIN ADV PLUS @ BLMAT/A/90	PRF0199291
-----------------------------	------------

BOXIN ADV PLUS @ BLMAT/A/120	PRF0199292
------------------------------	------------

Boxin Advance Dry

Elica Design Center



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	B
-----------------------------------	---

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
---	--

Gas	57 cm
-----	-------


Induzione/Radiante Induction/Radiant	50 cm
---	-------

MATERIALI & DIMENSIONI SIZE & MATERIALS	
--	--

60 - 75 - 90 - 120 cm

Aspirante Duct-out	
-----------------------	--

Acciaio inox Stainless steel	
---------------------------------	--

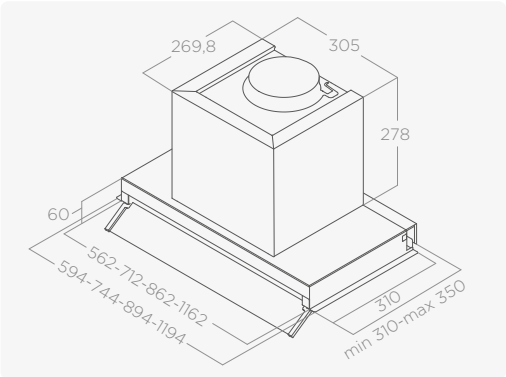

Può attivarsi, regolarsi e spegnarsi da sola se l’aria non è pulita. Questa cappa protegge i pensili dall’usura dovuta all’eccessiva formazione di vapore e condensa. La connessione consente di comandarla via app o assistente vocale e può essere connessa via bluetooth al piano a induzione Elica, regolando la potenza di aspirazione in base alle zone di cottura attive. L’app consente anche di contattare immediatamente l’assistenza e monitorare lo stato dei filtri. Il suo design connotato dalle protezioni laterali è studiato per proteggere i pensili della cucina. La potenza luminosa è regolabile a seconda dei vostri desideri.

It can switch on, make adjustments and switch off by itself according to the air conditions. This hood protects your cabinets from damage caused by excessive steam and condensation. Thanks to its connectivity, you can control it via an app or voice assistant, and connect, via Bluetooth, to Elica induction hobs, to adjust the extraction power based on the cooking zones in use. The app also enables immediate access to customer support and check the condition of the filters. Its design, featuring side guards, is crafted to protect your kitchen units. The lighting can be adjusted to reflect the mood you want to create.



ILLUMINAZIONE LIGHTING	
---------------------------	--

Tipo Type	Strip Led 1×7W
--------------	----------------

Intensità Intensity	421 LUX
------------------------	---------

Temperatura Temperature	3500 K
----------------------------	--------

Filtro grassi inox incluso Stainless steel grease filters included	
---	--

FUNZIONI FEATURES	
----------------------	--

- Long Life Filter
- Cabinet Protection
- Airmatic
- Dim Light
- Delay Switch Off
- Connectivity
- Total Integration
- Maintenance Alarm
- No Drip System
- Multi Connection

PERFORMANCE PERFORMANCE	
----------------------------	--

Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
---------------------	---

Portata intensiva Booster airFlow	710 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	50-66 db(A)
---	-------------

Assorbimento totale Total absorption	257 W
---	-------

ACCESSORI ACCESSORIES	
--------------------------	--

Filtro carbone Charcoal filter	CFC0140343
-----------------------------------	------------

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
--	------------

Kit camino H18,5+18,5 Chimney kit H18,5+18,5	KIT0141458
---	------------

Kit camino H12 Chimney kit H12	KIT0091876
-----------------------------------	------------

Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617
---	------------

MODELLI MODELS	
-------------------	--

BOXIN ADV DRY @ IX/A/60	PRF0199886
-------------------------	------------

BOXIN ADV DRY @ IX/A/75	PRF0200559
-------------------------	------------

BOXIN ADV DRY @ IX/A/90	PRF0200560
-------------------------	------------

BOXIN ADV DRY @ IX/A/120	PRF0200561
--------------------------	------------

Showcasing
Boxin Advance Dry



Boxin No Drip

Design Fabrizio Crisà



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A
-----------------------------------	---

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
---	--

Gas	62 cm
-----	-------


Induzione/Radiante Induction/Radiant	50 cm
---	-------

MATERIALI & DIMENSIONI SIZE & MATERIALS	
--	--

60 - 90 - 120 cm

Aspirante Duct-out	
-----------------------	--

Acciaio inox Stainless steel	
---------------------------------	--

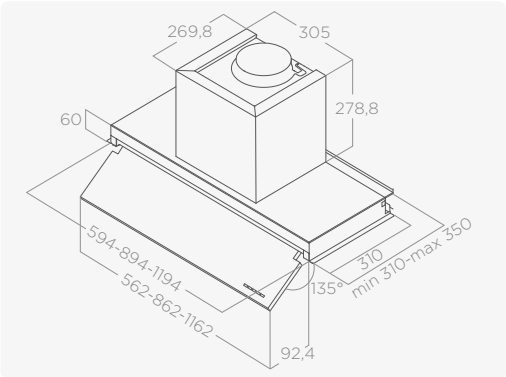

Finalmente il vostro piano a induzione è definitivamente protetto dal gocciolio della condensa. Il segreto? Le resistenze elettriche interne ne riscaldano la superficie fino a 42°, riducendo la differenza di temperatura tra il vapore e i componenti metallici. Eliminando il problema! Inoltre, il sistema è affiancato da una griglia (che fa scivolare le gocce in una vaschetta rimovibile) e da un frontalino protettivo inclinato a 45° (che tiene lontano il vapore dalle ante del pensile). Geniale, no?

Finally, your induction hob is protected for good against condensation dripping from the hood. What's the secret? Internal electric heating elements raise the surface temperature to 42°C, reducing the temperature difference between the vapour and metal parts. Problem solved! Additionally, the system is equipped with a grille (which directs the droplets into a removable tray) and a protective front panel titled at a 45° angle (which keeps steam away from cabinet doors). Brilliant, right?



ILLUMINAZIONE LIGHTING	
---------------------------	--

Tipo Type	Led 2×2,5 W
--------------	-------------

Intensità Intensity	381 LUX
------------------------	---------

Temperatura Temperature	3500 K
----------------------------	--------

Filtro grassi inox incluso Stainless steel grease filters included	
---	--

ACCESSORI ACCESSORIES	
--------------------------	--

Filtro carbone Charcoal filter	CFC0140343
-----------------------------------	------------

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
--	------------

Kit camino H18,5+18,5 Chimney kit H18,5+18,5	KIT0141458
---	------------

Kit camino H12 Chimney kit H12	KIT0091876
-----------------------------------	------------

Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617
---	------------

FUNZIONI FEATURES	
----------------------	--

- Long Life Filter
- Easy to Maintain
- Maintenance Alarm
- Total Integration
- No Drip System
- Cabinet Protection

PERFORMANCE PERFORMANCE	
----------------------------	--

Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
---------------------	---

Portata intensiva Booster airflow	680 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	34-66 db(A)
---	-------------

Assorbimento totale Total absorption	307 W (60cm) - 350 W (90cm) - 377 W (120cm)
---	---

MODELLI MODELS	
-------------------	--

BOXIN NO DRIP IX/A/60	PRF0157712A
-----------------------	-------------

BOXIN NO DRIP IX/A/90	PRF0156613A
-----------------------	-------------

BOXIN NO DRIP IX/A/120	PRF0157280A
------------------------	-------------

Boxin Advance

Design Fabrizio Crisà



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A+
-----------------------------------	----

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
---	--

Gas	57 cm
-----	-------


Induzione/Radiante Induction/Radiant	50 cm
---	-------

MATERIALI & DIMENSIONI SIZE & MATERIALS	
--	--

60 - 90 - 120 cm

Aspirante Duct-out	
-----------------------	--

Acciaio inox Stainless steel	
---------------------------------	--

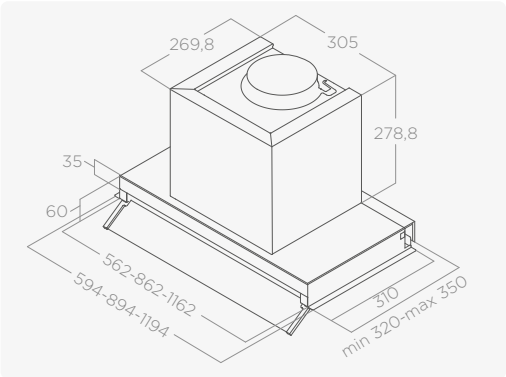

Integrazione totale, bassi consumi, silenziosità e facilità di pulizia connotano questa cappa con visiera frontale apribile a 45° dalle elevate prestazioni. Funzioni e sensori accendono automaticamente la cappa quando si sta cucinando; impostano la velocità di aspirazione in base alla quantità di fumi e vapori; la spengono quando la qualità dell'aria raggiunge il livello ottimale. Il suo motore di nuova generazione abbatte i consumi e la rumorosità anche alla massima potenza. Non è tutto: questa cappa è regolabile via app o assistente vocale e può essere connessa via bluetooth al piano a induzione Elica, regolando la potenza di aspirazione in base alle zone di cottura attive. Inoltre, si integra anche con l'illuminazione della cucina consentendovi di scegliere fra tre diverse temperature luminose (più calde o più fredde). Questo modello è disponibile anche nella versione con filtri antigrasso in acciaio inox.

Full integration, low energy consumption, quiet operation, and easy to clean, this hood features a front shield that opens to 45° for superior performance. The functions and sensors switch on automatically while you are cooking, adjusting the extraction power according to the level of fumes and vapours detected, and switch off when air quality reaches an optimal level. The latest generation motor reduces consumption and noise levels, even at the highest power setting. And that's not all: the hood can be controlled via an app or voice assistant, and connected, via Bluetooth, to Elica induction hobs, to adjust the extraction power based on the cooking zones in use. Additionally, it also integrates with the kitchen lighting so you can select one of the three different light temperatures (warmer or cooler). This model is also available with stainless steel grease filters.



ILLUMINAZIONE LIGHTING	
---------------------------	--

Tipo Type	Strip Led 1x7 W
--------------	-----------------

Intensità Intensity	421 LUX (60cm) - 365 (90cm) - 309 (120cm)
------------------------	---

Temperatura Temperature	3000 - 3500 - 4000 K
----------------------------	----------------------

Filtro grassi alluminio incluso Aluminium grease filter included	
---	--

ACCESSORI ACCESSORIES	
--------------------------	--

Filtro carbone Charcoal filter	CFC0140343
-----------------------------------	------------

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
--	------------

Kit camino H18,5+18,5 Chimney kit H18,5+18,5	KIT0141458
---	------------

Kit camino H12 Chimney kit H12	KIT0091876
-----------------------------------	------------

Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617
---	------------

FUNZIONI FEATURES	
----------------------	--

- Long Life Filter
- Tune White
- Comfort Silence
- Dim Light
- Maintenance Alarm
- Connectivity
- Total Integration
- Delay Switch Off
- Multi Connection
- Airmatic
- Cabinet Protection
- Brushless

PERFORMANCE PERFORMANCE	
----------------------------	--

Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
---------------------	---

Portata intensiva Booster airflow	660 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	45-58 db(A)
---	-------------

Assorbimento totale Total absorption	177 W
---	-------

MODELLI MODELS	
-------------------	--

BOXIN ADVANCE @ IX/A/60	PRF0180599A
-------------------------	-------------

BOXIN ADVANCE @ IX/A/90	PRF0181497A
-------------------------	-------------


BOXIN ADVANCE @ IX/A/120	PRF0182703A
--------------------------	-------------

Boxin Plus

Elica Design Center




CLASSE ENERGETICA ENERGY CLASS		B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		50 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 - 120 cm			
Aspirante Duct-out			
Acciaio inox + vetro bianco Stainless steel + white glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,5 W		
Intensità Intensity	381 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included			

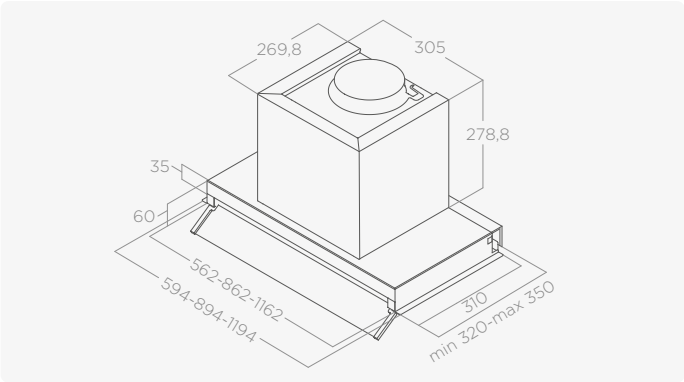


Elica Design Center

Boxin

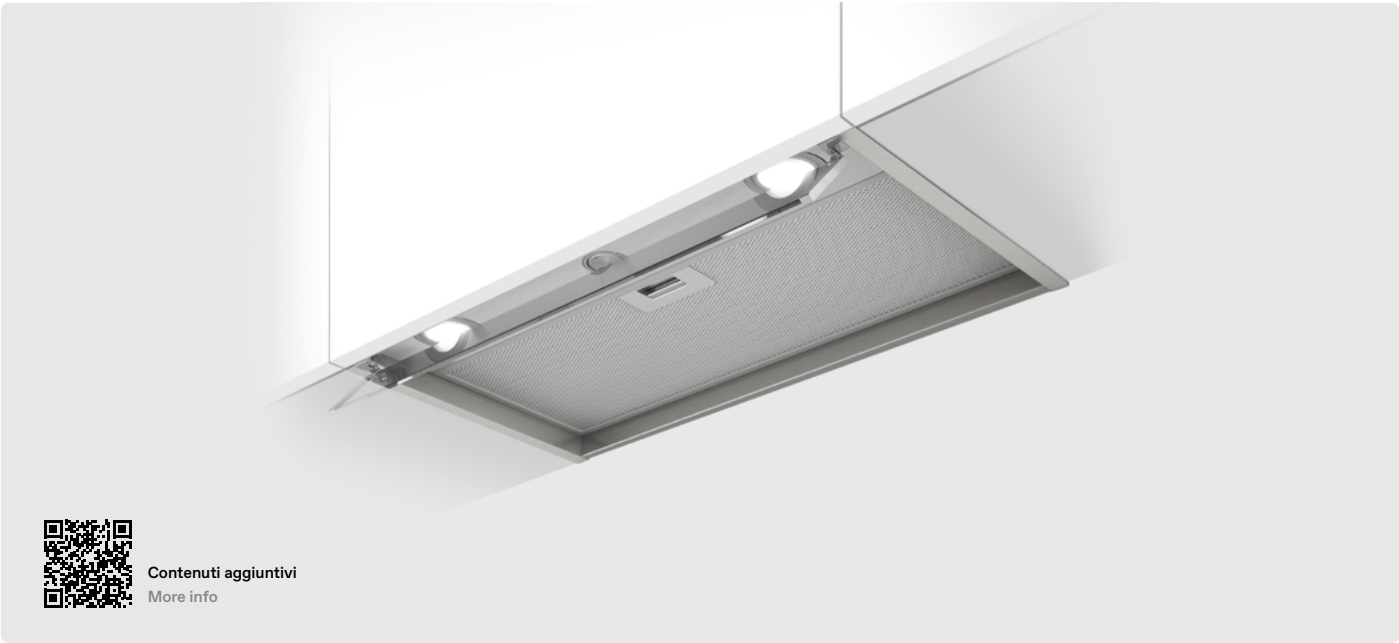

CLASSE ENERGETICA ENERGY CLASS		A (LUX) - D (STD)	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		50 cm	45 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 - 120 cm			
Aspirante Duct-out			
Acciaio inox, nero Stainless steel, black			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,5 W		
Intensità Intensity	381 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included			

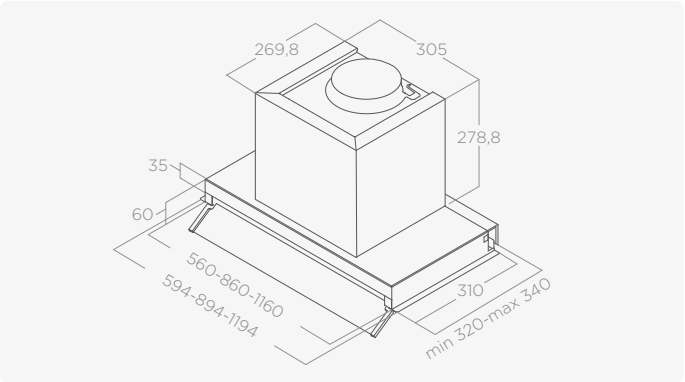

PERFORMANCE		
PERFORMANCE		
Comandi Controls	Rotativo meccanico 3V 3S Mechanical rotative	
	STD	LX
Portata massima Max airflow	370 m³/h	620 m³/h
Livello sonoro min-max Noise level min-max	48-67 db(A)	50-70 db(A)
Assorbimento totale Total absorption	95 W	255 W
FUNZIONI		
FEATURES		
 Long Life Filter		
 Cabinet Protection		
 Total Integration		
ACCESSORI		
ACCESSORIES		
Filtro carbone (*) Charcoal filter	CFC0140343	
Filtro carbone rigenerabile (*) Regenerable charcoal filter	CFC0162221	
Filtro carbone Charcoal filter	CFC0141497	
Kit camino H18,5+18,5 Chimney kit H18,5+18,5	KIT0141458	
Kit camino H12 Chimney kit H12	KIT0091876	
Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617	
MODELLI MODELS		
BOXIN IX/A/60	PRF0097835B	
BOXIN IX/A/90	PRF0097839B	
BOXIN IX/A/120	PRF0097842B	
BOXIN LX/IX/A/60 (*)	PRF0114760A	
BOXIN LX/IX/A/90 (*)	PRF0114761A	
BOXIN LX/IX/A/120 (*)	PRF0114762A	
BOXIN LX/BL MAT/A/60 (*)	PRF0172166	
BOXIN LX/BL MAT/A/90 (*)	PRF0172167	
BOXIN LX/BL MAT/A/120 (*)	PRF0172168	

Hidden Advance Plus

Design Fabrizio Crisà



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A
-----------------------------------	---

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
---	--

Gas	57 cm
Gas	


Induzione/Radiante Induction/Radiant	43 cm
---	-------

MATERIALI & DIMENSIONI SIZE & MATERIALS	
--	--

60 - 80 cm

Aspirante Duct-out	
-----------------------	--

Acciaio inox, nero effetto soft touch + vetro nero Stainless steel, black soft touch effect + black glass	
--	--

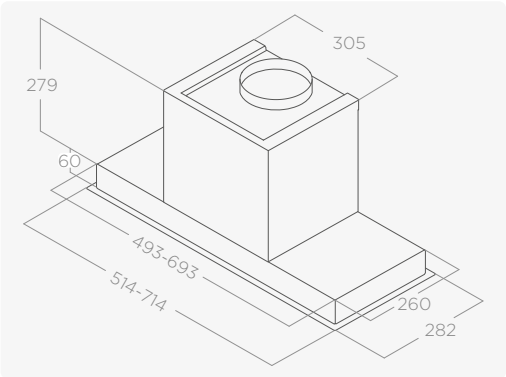

Connessione totale, con l'app e con il piano aspirante. Un design a scomparsa cela un sistema aspirante sempre connesso, capace di dialogare con voi e con il piano cottura. Tramite l'app Elica, potrete gestirne attivazione e regolazione con smartphone o assistente vocale; tramite la connessione via bluetooth al piano cottura e ai sensori intelligenti invece si regolerà da sola, rilevando presenza e quantità dei fumi e attivandosi di conseguenza con la potenza necessaria. Le sue dotazioni non finiscono qui: il motore di nuova generazione garantisce la minima rumorosità anche alla massima potenza, abbattendo i consumi eneregtici; l'illuminazione a 3 fasi vi permette di scegliere intensità e temperature della luce (dai toni caldi a quelli freddi); l'estrema facilità d'uso si associa all'avviso via app della manutenzione e sostituzione dei filtri di lunga durata: 3 anni vs la media del mercato di 3-6 mesi.

Total connectivity, with the app and with the extractor hob. The concealed design hides an extraction system that is always connected, capable of communicating with you and with the hob. Control when to turn it on and change the settings via the Elica app with your smartphone or voice assistant. Via the connection via Bluetooth to the hob and to the smart sensors, it adjusts on its own, when it detects certain amounts of fumes activating the required extraction power accordingly. Its features don't end here: the latest generation motor ensures whisper-quiet operation even on the highest power setting, and reduces energy consumption; the 3-phase lighting allows you to choose the intensity and temperature of the light (from warm to cool tones); the extreme ease of use is enhanced with app notifications reminding you when to service or change the long life filters: they last 3 years (vs standard filters that last only 3-6 months).



ILLUMINAZIONE LIGHTING	
Tipo Type	Strip Led 1x7 W
Intensità Intensity	477 LUX
Temperatura Temperature	3000 - 3500 - 4000 K
Filtro grassi alluminio incluso Aluminium grease filter included	

ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
Kit camino H18,5+18,5 Chimney kit H18,5+18,5	KIT0141458
Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617

FUNZIONI FEATURES		
Long Life Filter	Perimeter Aspiration	Comfort Silence
Dim Light	Tune White	Connectivity
Total Integration	Airmatic	Delay Switch Off
Maintenance Alarm	Brushless	Multi Connection

PERFORMANCE PERFORMANCE	
Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
Portata intensiva Booster airFlow	640 m³/h
Livello sonoro min-max Noise level min-max	45-57 db(A)
Assorbimento totale Total absorption	177 W

MODELLI MODELS	
HIDDEN ADV PLUS @ IX/A/52	PRF0180299A
HIDDEN ADV PLUS @ IX/A/72	PRF0182867A
HIDDEN ADV PLUS @ BLGL/A/52	PRF0183971A
HIDDEN ADV PLUS @ BLGL/A/72	PRF0184107A



Showcasing
Hidden Advance Plus




Hidden 2.0

Design Fabrizio Crisà



CLASSE ENERGETICA ENERGY CLASS		A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 80 cm			
Aspirante Duct-out			
Acciaio inox, acciaio inox + vetro bianco, acciaio inox + nero effetto soft touch Stainless steel, stainless steel + white glass, stainless steel + black soft touch effect			
ILLUMINAZIONE LIGHTING			
Tipo Type	Strip Led 1x7 W		
Intensità Intensity	421 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included			

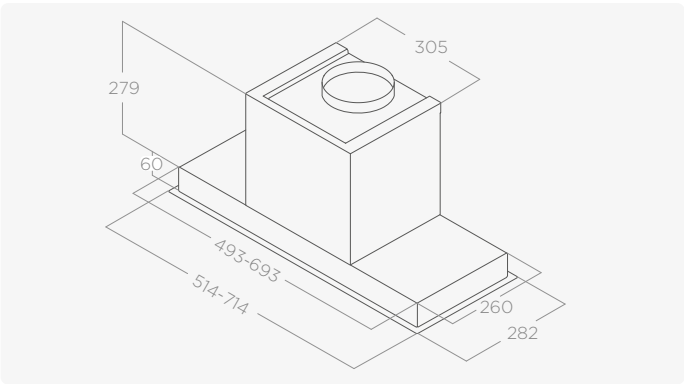


Elica Design Center

Ct35 Pro



CLASSE ENERGETICA ENERGY CLASS		A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 - 120 cm			
Aspirante Duct-out			
Acciaio inox Stainless steel			
ILLUMINAZIONE LIGHTING			
	60 cm	90 cm	120 cm
Tipo Type	Strip Led 2x3 W	Strip Led 2x3 W	Strip Led 2x3 W
Intensità Intensity	121 LUX	97 LUX	73 LUX
Temperatura Temperature	4200 K	4200 K	4200 K
Filtri Grassi Professionali Inox inclusi Professional stainless steel grease filter included			

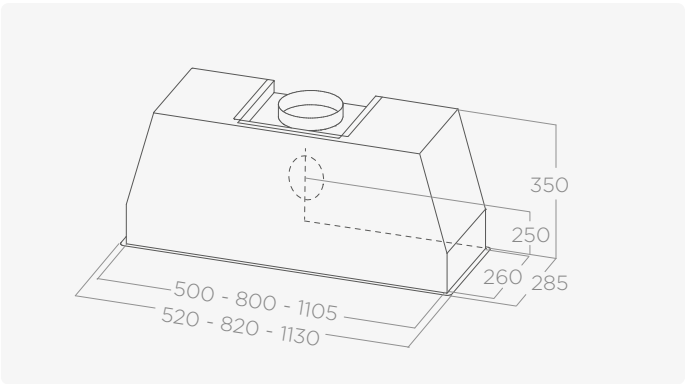


PERFORMANCE			
PERFORMANCE			
Comandi Controls		Pulsantiera elettronica 3V+I 3S+B Electronic push button	
	60 cm	90 cm	120 cm
Portata intensiva Booster airFlow	650 m³/h	750 m³/h	780 m³/h
Livello sonoro min-max Noise level min-max	51-73 db(A)	50-69 db(A)	52-69 db(A)
Assorbimento totale Total absorption	281 W	281 W	281 W
AKCESORIA			
ACCESSORIES			
Motore remoto esterno GME11 External remote motor GME11		PRF0006209A	
Motore remoto esterno GME22A (muro) External remote motor GME22A (wall)		PRF0179706	
FUNZIONI			
FEATURES			
 Back Aspiration	 Easy to Maintain	 Delay Switch	O
 Maintenance Alarm	 Total Integration		

MODELLI MODELS	
CT35 PRO IX/A/60	PRF0183203
CT35 PRO IX/A/90	PRF0183209
CT35 PRO IX/A/120	PRF0183210
CT35 PRO GME IX/A/60	PRF0183213
CT35 PRO GME IX/A/90	PRF0183218
CT35 PRO GME IX/A/120	PRF0183219

Lane Sensor

Design Fabrizio Crisà

CLASSE ENERGETICA ENERGY CLASS	B
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
Gas	57 cm
Induzione/Radiante Induction/Radiant	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS	
60 - 80 cm	
Aspirante Duct-out	
Acciaio inox, nero effetto soft touch Stainless steel, black soft touch effect	

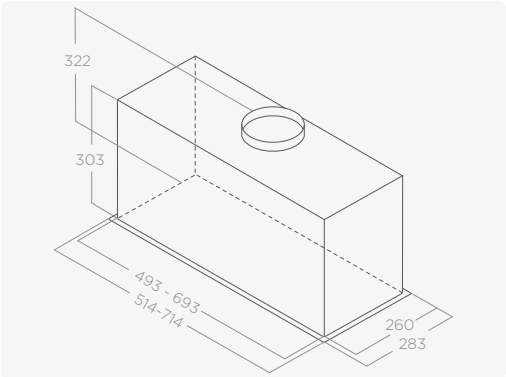

Perfettamente a filo e integrata nel pensile, dispone di un sistema perimetrale che amplifica la superficie di aspirazione. La sua strip a led illumina il piano cottura in modo ottimale. Inoltre, questa cappa a incasso è facilissima da installare: è possibile montarla in meno di un minuto.

Perfectly flush and integrated into the cabinet, it features a perimeter system that enhances the extraction surface. Its LED strip provides optimal illumination over the hob. Moreover, this built-in hood is incredibly easy to install: it can be mounted in less than a minute.



ILLUMINAZIONE LIGHTING	
Tipo Type	Strip Led 1x7 W
Intensità Intensity	421 LUX
Temperatura Temperature	3500 K
Filtro grassi alluminio incluso Aluminium grease filter included	

- FUNZIONI
FEATURES
- Airmatic

Long Life Filter

Perimeter Aspiration

Easy to Maintain

Total Integration

Maintenance Alarm

Delay Switch Off

Dim Light

Super Easy Installation

Connectivity

Multi Connection

PERFORMANCE PERFORMANCE	
Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
Portata intensiva Booster airFlow	650 m³/h
Livello sonoro min-max Noise level min-max	49-65 db(A)
Assorbimento totale Total absorption	257 W

ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617


MODELLI MODELS	
LANE SENSOR @ BLMAT/A/52	PRF0188472A
LANE SENSOR @ BLMAT/A/72	PRF0188480A
LANE SENSOR @ IX/A/52	PRF0188199A
LANE SENSOR @ IX/A/72	PRF0188201A

Lane

Design Fabrizio Crisà



CLASSE ENERGETICA ENERGY CLASS		B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		50 cm	45 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 80 cm			
Aspirante Duct-out			
Acciaio inox, nero effetto soft touch, bianco Stainless steel, black soft touch effect, white			
ILLUMINAZIONE LIGHTING			
Tipo Type	Strip Led 1x7 W		
Intensità Intensity	365 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included			

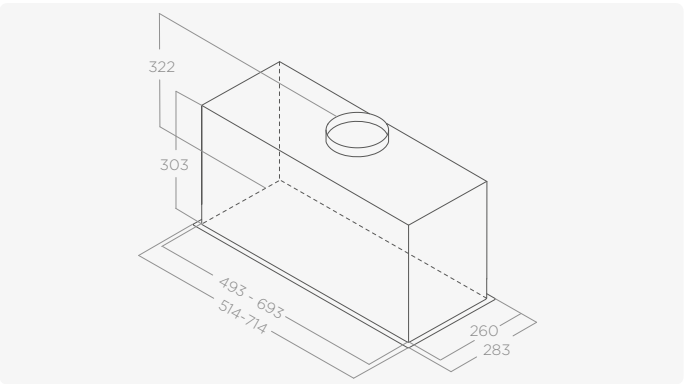

PERFORMANCE PERFORMANCE	
Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
Portata intensiva Booster airflow	650 m³/h
Livello sonoro min-max Noise level min-max	49-65 db(A)
Assorbimento totale Total absorption	257 W
FUNZIONI FEATURES	
Long Life Filter Easy to Maintain Perimeter Aspiration	
Total Integration Delay Switch Off Maintenance Alarm	
Super Easy Installation	

ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617


MODELLI MODELS	
LANE IX/A/52	PRF0157333
LANE WH/A/52	PRF0157357
LANE IX/A/72	PRF0157377
LANE WH/A/72	PRF0157394
LANE BL MAT/A/52	PRF0165830
LANE BL MAT/A/72	PRF0165834

Elica Design Center

Fold S



CLASSE ENERGETICA ENERGY CLASS		B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	45 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 80 cm			
Aspirante Duct-out			
Acciaio inox Stainless steel			
ILLUMINAZIONE LIGHTING			
Tipo Type	Strip Led 1x7 W		
Intensità Intensity	477 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included			

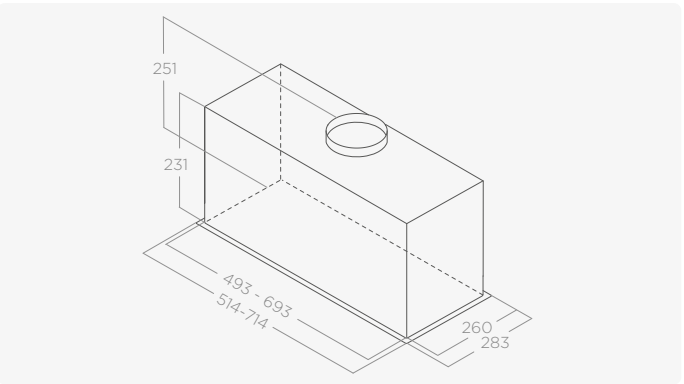

PERFORMANCE PERFORMANCE	
Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
Portata intensiva Booster airflow	710 m³/h
Livello sonoro min-max Noise level min-max	53-66 db(A)
Assorbimento totale Total absorption	267 W
FUNZIONI FEATURES	
Long Life Filter Easy to Maintain Maintenance Alarm	
Total Integration Delay Switch Off Super Easy Installation	

ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617

MODELLI MODELS	
FOLD S IX/A/52	PRF0181962
FOLD S IX/A/72	PRF0181963

Fold

Elica Design Center



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	45 cm

MATERIALI & DIMENSIONI SIZE & MATERIALS

60 - 80 cm


Aspirante
Duct-out

Silver, nero
Silver, black

ILLUMINAZIONE LIGHTING

Tipo Type	Led 2×2,1 W
Intensità Intensity	221 LUX
Temperatura Temperature	3500 K

Filtro grassi alluminio incluso
Aluminium grease filter included

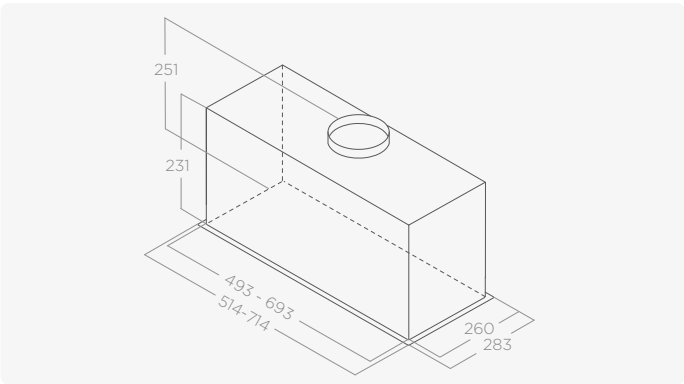

PERFORMANCE PERFORMANCE

Comandi
Controls

Pulsantiera soft light 3V
3S Soft light push button

Portata intensiva
Booster airflow

600 m³/h

Livello sonoro min-max
Noise level min-max

46-65 db(A)

Assorbimento totale
Total absorption

180 W

FUNZIONI FEATURES

- Long Life Filter
- Easy to Maintain
- Total Integration
- Super Easy Installation

ACCESSORI ACCESSORIES

Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617

MODELLI MODELS

FOLD GR/A/52	PRF0180808
FOLD GR/A/72	PRF0180820
FOLD BL MAT/A/52	PRF0181960
FOLD BL MAT/A/72	PRF0181961

Elica Design Center

Era S



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm

MATERIALI & DIMENSIONI SIZE & MATERIALS

60 - 80 cm


Aspirante
Duct-out

Acciaio inox, nero
Stainless steel, black

ILLUMINAZIONE LIGHTING

Tipo Type	Led 2×3 W
Intensità Intensity	73 LUX
Temperatura Temperature	2700 K

Filtro grassi inox incluso
Stainless steel grease filter included

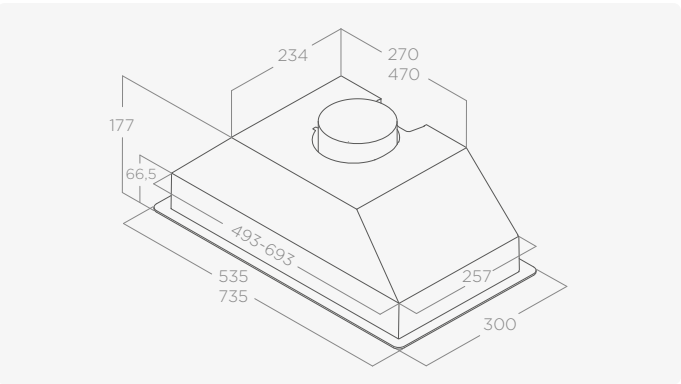

PERFORMANCE PERFORMANCE

Comandi
Controls

Rotativo meccanico 3V
3S Mechanical rotative

Portata massima
Max airflow

428 m³/h

Livello sonoro min-max
Noise level min-max

57-68 db(A)

Assorbimento totale
Total absorption

121 W

ACCESSORI ACCESSORIES

Filtro carbone
Charcoal filter

CFC0141571

FUNZIONI FEATURES

- Easy to Maintain

MODELLI MODELS


ERA S BL/A/52	PRF0197684
ERA S BL/A/72	PRF0197686
ERA S IX/A/52	PRF0142886
ERA S IX/A/72	PRF0142744

Era C

Elica Design Center




CLASSE ENERGETICA ENERGY CLASS		D	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	45 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 80 cm			
Aspirante Duct-out			
Acciaio inox, bianco, nero Stainless steel, white, black			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x3 W		
Intensità Intensity	73 LUX		
Temperatura Temperature	2700 K		
Filtro grassi alluminio incluso Aluminium grease filter included			

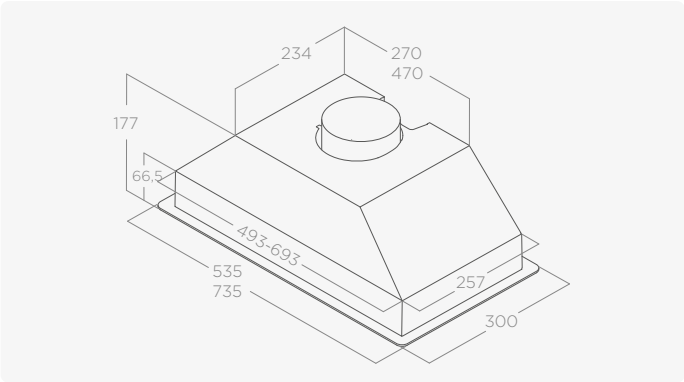

Elica Design Center



CLASSE ENERGETICA ENERGY CLASS		C	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 80 cm			
Aspirante Duct-out			
Silver Silver			
ILLUMINAZIONE LIGHTING			
Tipo Type		Led 2x3 W	
Intensità Intensity		78 LUX	
Temperatura Temperature		2700 K	
Filtro grassi alluminio incluso Aluminium grease filter included			

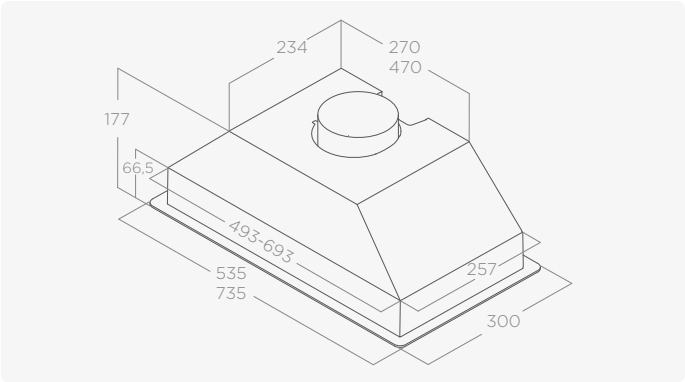

PERFORMANCE	
PERFORMANCE	
Comandi Controls	Slider meccanico 3V 3S Mechanical slider
Portata massima Max airflow	224 m³/h
Livello sonoro min-max Noise level min-max	45-54 db(A)
Assorbimento totale Total absorption	81 W
FUNZIONI	
FEATURES	
 Easy to Maintain	
ACCESSORI	
ACCESSORIES	
Filtro carbone Charcoal filter	CFC0141571

MODELLI MODELS					
ERA GR/A/52			PRF0142633		
ERA GR/A/72			PRF0142701		
ERA BL/A/52			PRF0182028		
ERA BL/A/72			PRF0182023		


Lever

Elica Design Center



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS		B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		50 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 - 120 cm			
Aspirante Duct-out			
Acciaio inox + vetro Stainless steel + glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,5 W		
Intensità Intensity	145 LUX (60 - 90 cm) / 381 (120 cm)		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included			

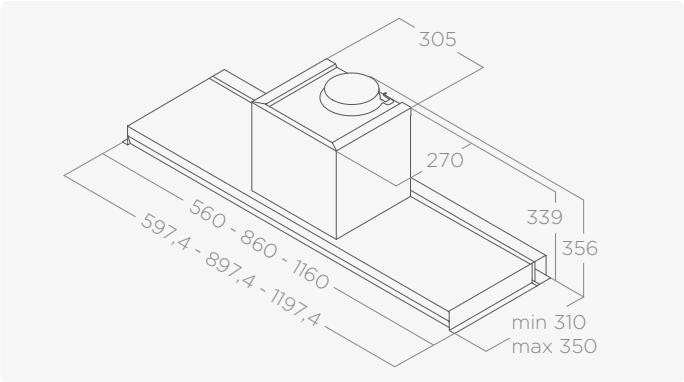

PERFORMANCE PERFORMANCE	
Comandi Controls	Pulsantiera meccanica 3V 3S Mechanical push button
Portata massima Max airflow	603 m³/h
Livello sonoro min-max Noise level min-max	46-67 db(A)
Assorbimento totale Total absorption	255 W
FUNZIONI FEATURES	
Long Life Filter Total Integration	
ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617
Kit camino telescopico h18,5+h18,5 Telescopic chimney kit h18,5+h18,5	KIT0141458
Kit camino H12 IX Chimney kit H12 IX	KIT0091876
MODELLI MODELS	
LEVER IX/A/56	PRF0160153
LEVER IX/A/86	PRF0160152
LEVER IX/A/116	PRF0163362


Elica Design Center

Ciak 2.0 S



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS		B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 cm			
Aspirante Duct-out			
Silver Silver			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,1 W		
Intensità Intensity	141 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included			

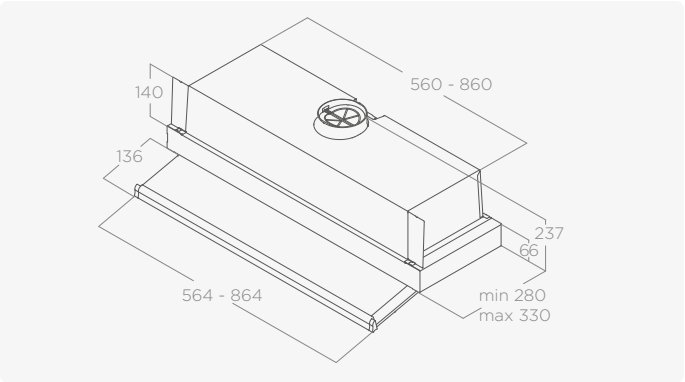

PERFORMANCE PERFORMANCE	
Comandi Controls	Slider meccanico 3V 3S Mechanical slider
Portata massima Max airflow	425 m³/h
Livello sonoro min-max Noise level min-max	57-69 db(A)
Assorbimento totale Total absorption	120 W
FUNZIONI FEATURES	
Easy to Maintain Total Integration	
ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0141571
MODELLI MODELS	
CIAK 2.0 S GR/A/60	PRF0181902
CIAK 2.0 S GR/A/90	PRF0181903


Ciak 2.0

Elica Design Center



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	C	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS		
60 - 90 cm		
Aspirante Duct-out		
Silver Silver		
ILLUMINAZIONE LIGHTING		
Tipo Type	Led 2×3 W	
Intensità Intensity	121 LUX	
Temperatura Temperature	2700 K	
Filtro grassi alluminio incluso Aluminium grease filter included		

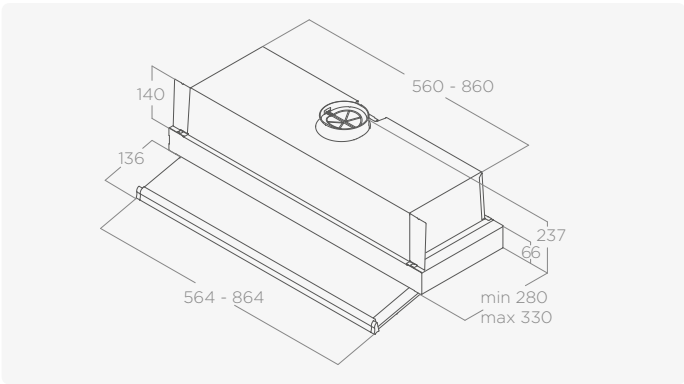

PERFORMANCE	
PERFORMANCE	
Comandi Controls	Slider meccanico 3V 3S Mechanical slider
Portata massima Max airflow	225 m³/h
Livello sonoro min-max Noise level min-max	47-55 db(A)
Assorbimento totale Total absorption	81 W
FUNZIONI	
FEATURES	
 Easy to Maintain  Total Integration	
ACCESSORI	
ACCESSORIES	
Filtro carbone Charcoal filter	CFC0141571

MODELLI MODELS		
CIAC 2.0 GR/A/60	PRF0181896	
CIAC 2.0 GR/A/90	PRF0181898	


Elite 35

Elica Design Center



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	43 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS		
60 - 90 cm		
Aspirante Duct-out		
Silver + acciaio inox Silver + stainless steel		
ILLUMINAZIONE LIGHTING		
Tipo Type	Led 2×3 W	
Intensità Intensity	49 LUX	
Temperatura Temperature	2700 K	
Filtro grassi alluminio incluso Aluminium grease filter included		

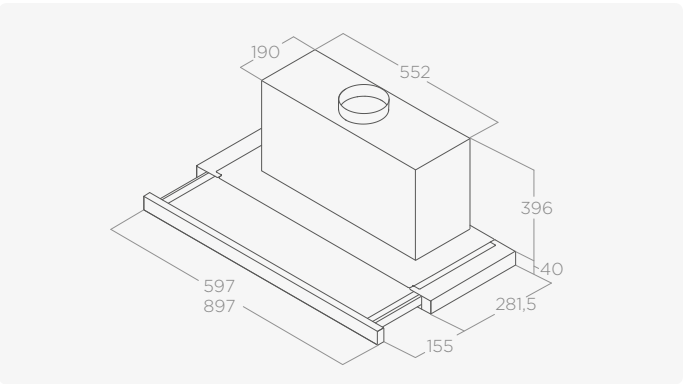

PERFORMANCE	
PERFORMANCE	
Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
Portata massima Max airfLow	640 m³/h
Livello sonoro min-max Noise level min-max	46-63 db(A)
Assorbimento totale Total absorption	206 W
FUNZIONI	
FEATURES	
 Maintenance Alarm  Delay Switch Off	
ACCESSORI	
ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140075
Kit griglia diffusore aria Ø150 mm Air diffuser grid kit 150mm	KIT0162617

MODELLI MODELS		
ELITE 35 GRIX/A/60	PRF0139077	
ELITE 35 GRIX/A/90	PRF0139069	


Elite 26

Elica Design Center



CLASSE ENERGETICA ENERGY CLASS		C	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 cm			
Aspirante Duct-out			
Acciaio inox + vetro, acciaio inox Stainless steel + glass, stainless steel			
ILLUMINAZIONE LIGHTING			
		PB	
Tipo Type	Led 2×2,5 W	Led 2×3 W	
Intensità Intensity	49 LUX	49 LUX	
Temperatura Temperature	3500 K	2700 K	

Filtro grassi alluminio incluso
Aluminium grease filter included

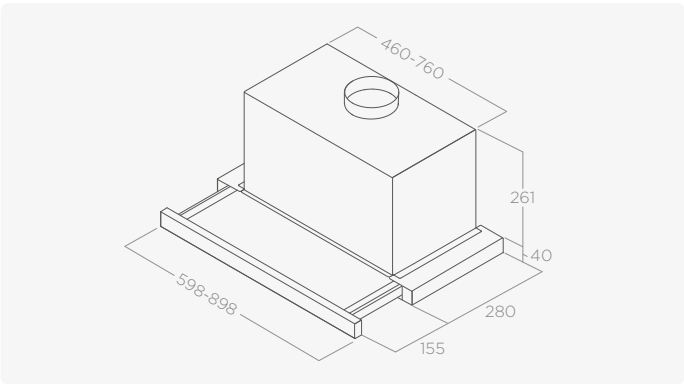

PERFORMANCE		
PERFORMANCE		
PB		
Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button	Pulsantiera meccanica 3V 3S Mechanical push button
Portata massima Max airFlow	581 m³/h	581 m³/h
Livello sonoro min-max Noise level min-max	44-61 db(A)	44-65 db(A)
Assorbimento totale Total absorption	180 W	181 W
FUNZIONI		
FEATURES		


- Maintenance Alarm
- Delay Switch Off

ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Kit staffe fissaggio laterale al pensile Side-fixing bracket kit for wall unit	KIT0179893

MODELLI MODELS	
ELITE 26 IX/A/60/VT	PRF0094051B
ELITE 26 IX/A/90/VT	PRF0094215B
ELITE26 IX/A/60	PRF0038809B
ELITE26 IX/A/90	PRF0038812B
ELITE 26 PB IX/A/60	PRF0126077B


Elica Design Center

Elite 14



CLASSE ENERGETICA ENERGY CLASS		C (PLUS) - D (LUX)	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
50 - 60 - 90 cm			
Aspirante Duct-out			
Silver + acciaio inox, acciaio inox, nero, bianco, grigio + vetro bianco, grigio + vetro, nero + vetro nero silver +stainless steel,stainless steel, black, white, grey + white glass, grey + glass, black + black glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2×3 W		
Intensità Intensity	73 LUX (LX) - 78 LUX (PLUS)		
Temperatura Temperature	2700 K		

Filtro grassi alluminio incluso
Aluminium grease filter included

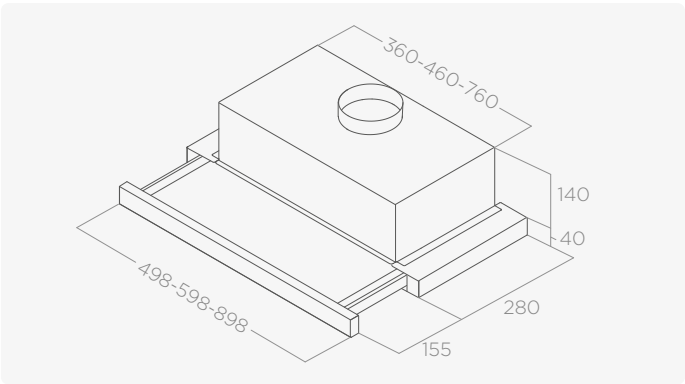

PERFORMANCE PERFORMANCE		
Comandi Controls	Pulsantiera meccanica 3V 3S Mechanical push button	
	LX	PLUS
Portata massima Max airflow	304 m³/h	400 m³/h
Livello sonoro min-max Noise level min-max	46-62 db(A)	60-70 db(A)
Assorbimento totale Total absorption	121 W	121 W
ACCESSORI ACCESSORIES		
Filtro carbone Charcoal filter	CFC0141571	
Kit staffe fissaggio laterale al pensile Side-fixing bracket kit for wall unit	KIT0179893	

MODELLI MODELS	
ELITE 14 LUX BLGB/A/60	PRF0202867
ELITE 14 LUX BL/A/50	PRF0081870B
ELITE 14 LUX BL/A/60	PRF0037991B
ELITE 14 LUX GRIX/A/50	PRF0037987B
ELITE 14 LUX GRIX/A/60	PRF0037989B
ELITE 14 LUX GRIX/A/90	PRF0037992B
ELITE 14 LUX GRVT/A/60	PRF0098874B
ELITE 14 LUX GRVT/A/90	PRF0098879B
ELITE 14 LUX GRVTWH/A/60	PRF0116536B
ELITE 14 LUX GRVTWH/A/90	PRF0116530B
ELITE 14 LUX WH/A/50	PRF0037988C
ELITE 14 LUX WH/A/60	PRF0037990B
ELITE 14 LUX WH/A/90	PRF0037993B
ELITE 14 PLUS IX/A/60	PRF0126053
ELITE 14 PLUS BL/A/60	PRF0181966

4.6

Cappe da incasso. Tutti i vantaggi, in dettaglio.

Built-in hoods. All the advantages, in detail.

Protezione dei pensili.

È la soluzione estetica e funzionale di Elica che protegge i mobili dai vapori di cottura. Le protezioni laterali per i fianchi del pensile e la visiera frontale ergonomica a tutela dell'anta prevengono i danni dovuti all'usura mantenendo intatta la bellezza della cucina. A queste protezioni Elica ha anche accompagnato tecnologie innovative, come il sistema No Drip anticondensa e gli speciali sensori che agevolano nella gestione autonoma del prodotto.

Cabinets protection.

It is Elica's aesthetic and functional solution to protect kitchen furniture from cooking vapours. The cabinet side guards and the ergonomic door protection front shield prevent damage from any wear and tear, while maintaining the beauty of your kitchen intact. Elica has also implemented innovative technologies, such as the No Drip anti-condensation system in addition to special sensors to make appliance management easier.



Design Salvaspazio all'interno del pensile delle cappe Boxin.
Space-saving design inside the Boxin hood cabinet.

Integrazione totale.

La gamma Elica delle cappe a incasso propone innumerevoli modelli a scomparsa. Quando sono chiusi e non attivi diventano invisibili, garantendo un effetto visivo estremamente lineare.



Full integration.

The line of built-in hoods by Elica offers numerous concealed models. They are invisible to the naked eye when closed and not in operation, providing an extremely linear visual effect.



No Drip, no condensa.

Alcuni modelli integrano la tecnologia che consente di evitare la formazione di condensa e di impedire il fastidioso gocciolamento sul piano cottura mentre si sta cucinando.

No Drip, no condensation.

Some models are equipped with a special technology that prevents condensation and bothersome drips on the hob during cooking.

La connessione bluetooth è presente















La connessione bluetooth è presente su diversi modelli e consente una gestione della cappa da app o assistente vocale. Permette anche di farla dialogare con un piano cottura Elica, regolando automaticamente la potenza di aspirazione in base alle zone di cottura attivate.

Bluetooth connection.



Some models come with Bluetooth connection to control the hood via app or voice assistant. It also allows the hood to interact with an Elica hob, to automatically adjust the extraction power based on the cooking zones in use.

4.6 Disegni tecnici.

Technical drawings.

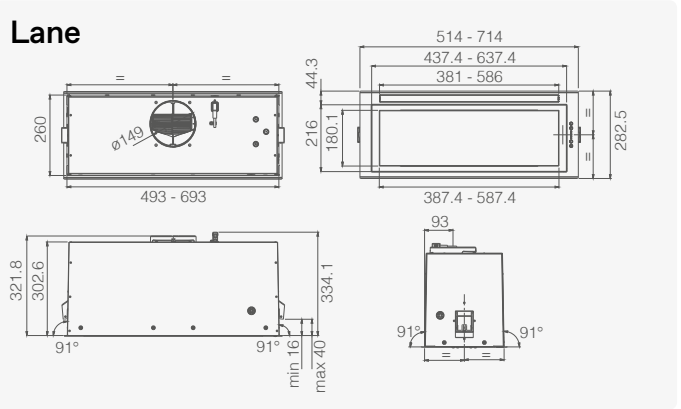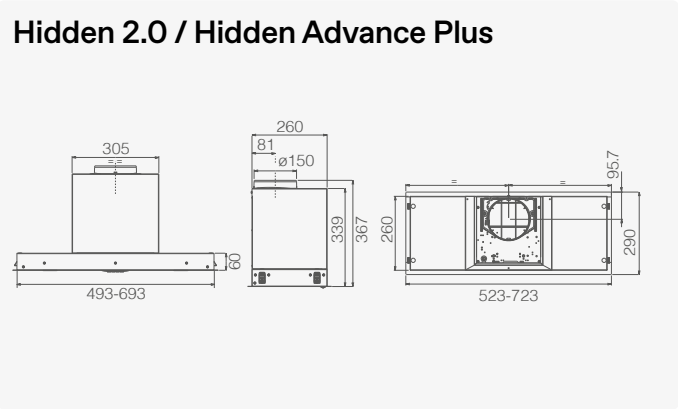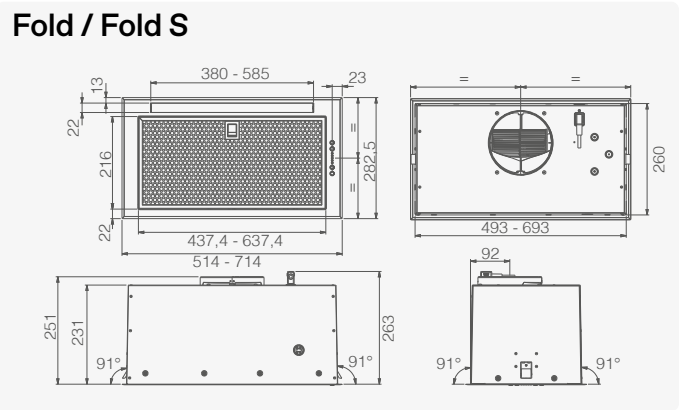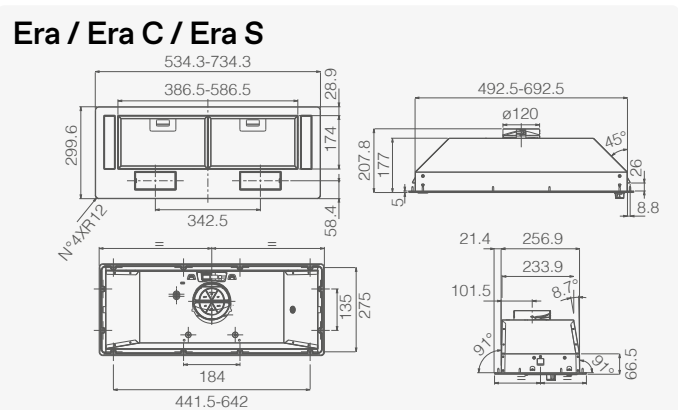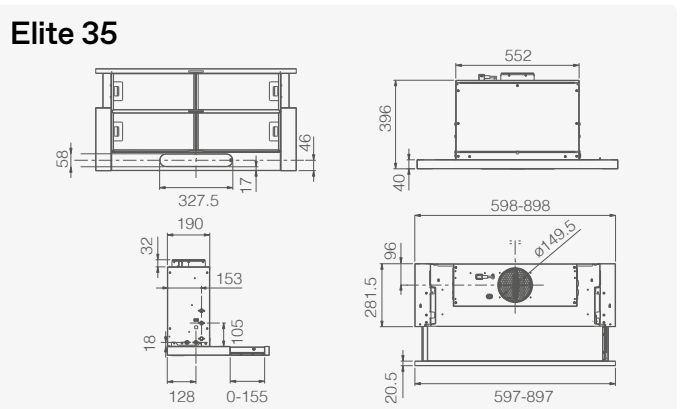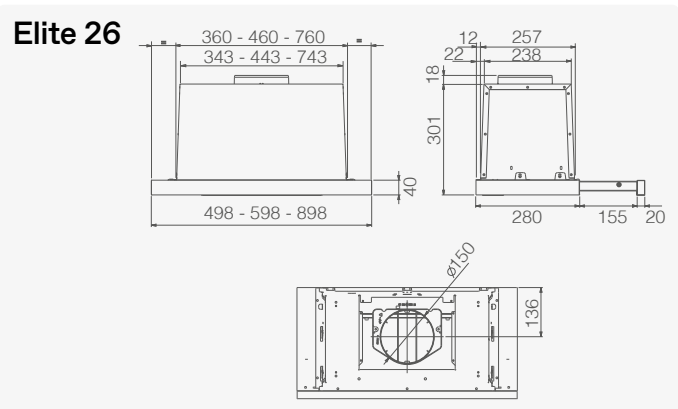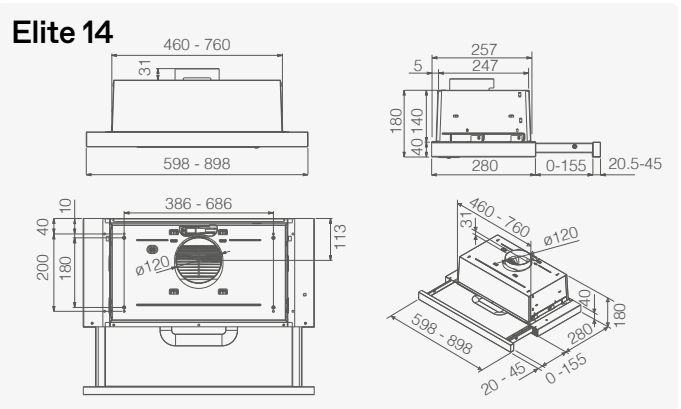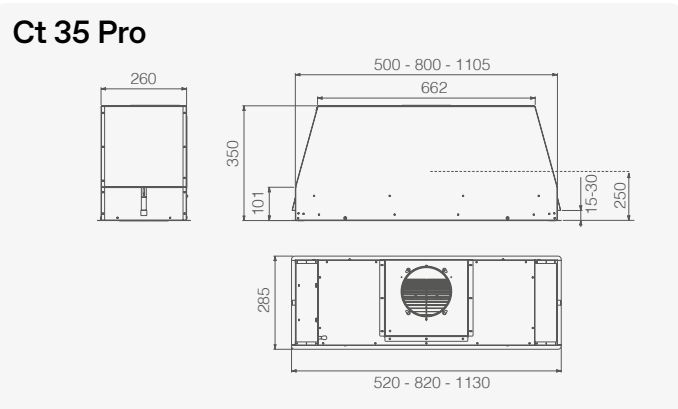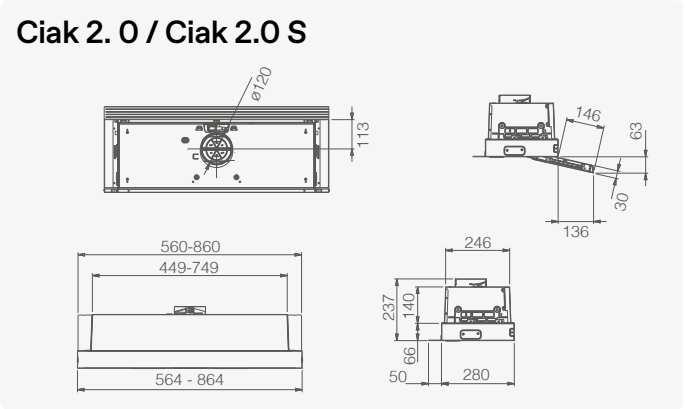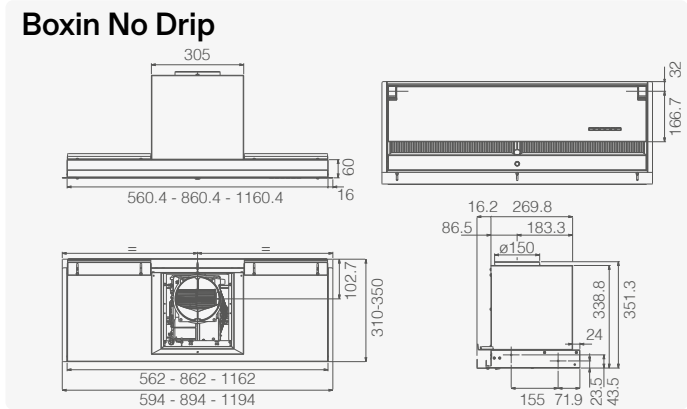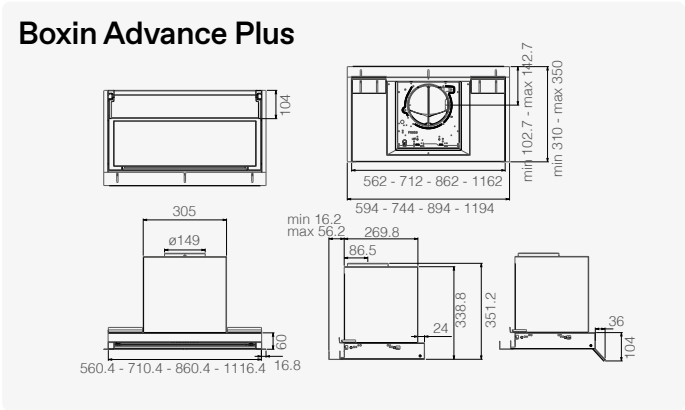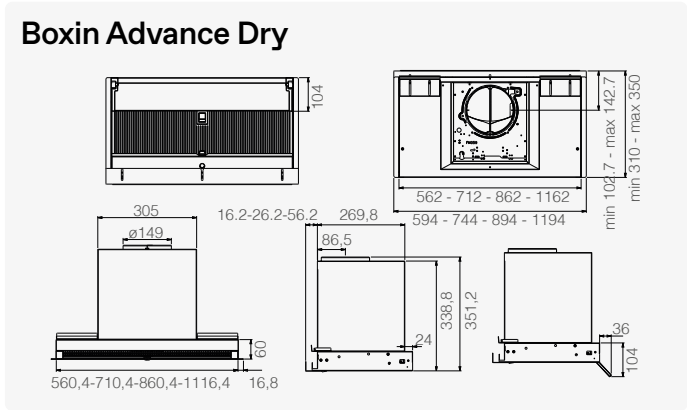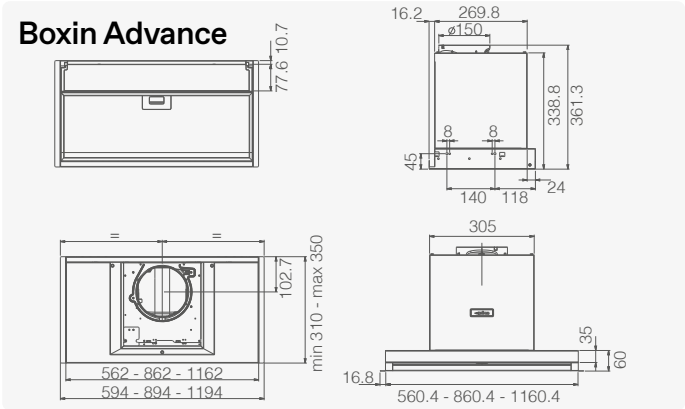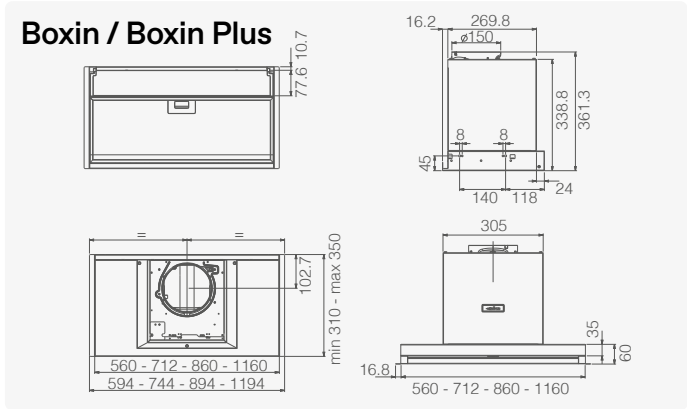

4.6

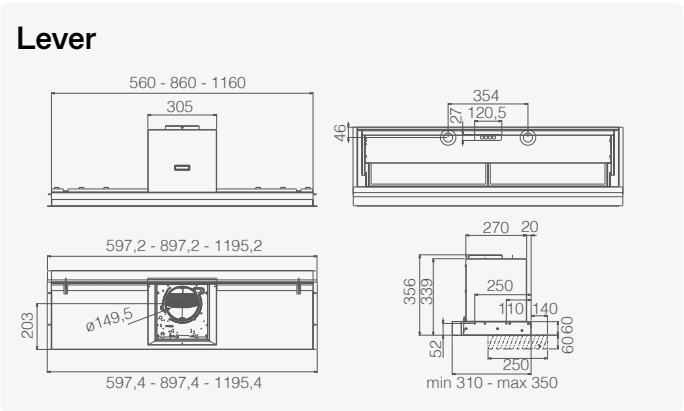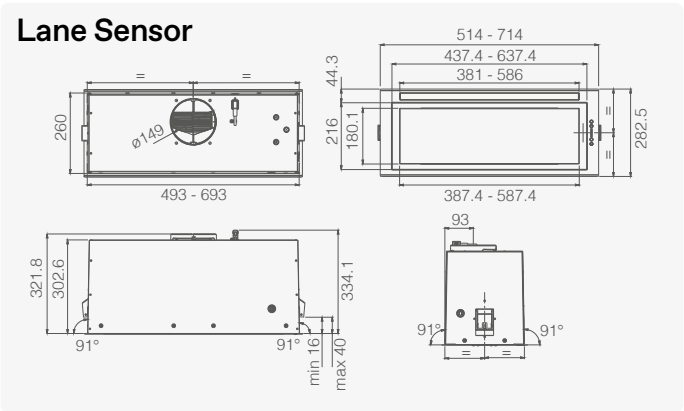

	CODICE FILTRO FILTER CODE	TIPO FILTRO FILTER TYPE		CODICE FILTRO FILTER CODE	TIPO FILTRO FILTER TYPE
Hidden 2.0	CFC0140343	Carbone / Charcoal	Lane Sensor	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal		CFC0162221	Carbone rigenerabile Regenerable charcoal
Hidden Advance Plus	CFC0140343	Carbone / Charcoal	Lever	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal		CFC0162221	Carbone rigenerabile Regenerable charcoal
Lane	CFC0140343	Carbone / Charcoal			
	CFC0162221	Carbone rigenerabile Regenerable charcoal			

Filtri odori.
Odour filters.

	CODICE FILTRO FILTER CODE	TIPO FILTRO FILTER TYPE
Boxin	CFC0141497	Carbone / Charcoal
Boxin Lx	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Boxin Advance	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Boxin Advance Dry	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Boxin Advance Plus	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Boxin No Drip	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Boxin Plus	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal

	CODICE FILTRO FILTER CODE	TIPO FILTRO FILTER TYPE
Ciak 2.0	CFC0141571	Carbone / Charcoal
Ciak 2.0 S	CFC0141571	Carbone / Charcoal
Elite 14	CFC0141571	Carbone / Charcoal
Elite 26	CFC0140343	Carbone / Charcoal
Elite 35	CFC0140075	Carbone / Charcoal
Era	CFC0141571	Carbone / Charcoal
Era C	CFC0141571	Carbone / Charcoal
Era S	CFC0141571	Carbone / Charcoal
Fold	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Fold S	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal

	ENERGY CLASS	1 SPEED (AIRFLOW-NOISE)	2 SPEED (AIRFLOW-NOISE)	3 SPEED (AIRFLOW-NOISE)	4 SPEED * (AIRFLOW-NOISE)	5 SPEED * (AIRFLOW-NOISE)
Boxin	D	140 m³/h - 48 db(A)	190 m³/h - 54 db(A)	370 m³/h - 67 db(A)	---	---
Boxin LX	A	255 m³/h - 50 db(A)	355 m³/h - 57 db(A)	620 m³/h - 67 db(A)	---	---
Boxin Advance	A	305 m³/h - 45 db(A)	415 m³/h - 57 db(A)	560 m³/h - 58 db(A)	---	660 m³/h - 64 db(A)
Boxin Advance Dry	B	270 m³/h - 52 db(A)	400 m³/h - 60 db(A)	580 m³/h - 67 db(A)	---	700 m³/h - 71 db(A)
Boxin Advance Plus	A	180 m³/h - 45 db(A)	280 m³/h - 48 db(A)	415 m³/h - 57 db(A)	---	640 m³/h - 67 db(A)
Boxin Lux	A	255 m³/h - 50 db(A)	355 m³/h - 57 db(A)	620 m³/h - 70 db(A)	---	---
Boxin No Drip	A	160 m³/h - 34 db(A)	425 m³/h - 60 db(A)	570 m³/h - 66 db(A)	---	680 m³/h - 70 db(A)
Boxin Plus	B	230 m³/h - 49 db(A)	335 m³/h - 56 db(A)	610 m³/h - 70 db(A)	---	---
Ciak 2.0	C	130 m³/h - 47 db(A)	165 m³/h - 50 db(A)	225 m³/h - 55 db(A)	---	---
Ciak 2.0 S	B	250 m³/h - 57 db(A)	340 m³/h - 64 db(A)	425 m³/h - 69 db(A)	---	---
CT35 PRO 60 cm	B	225 m³/h - 51 db(A)	430 m³/h - 64 db(A)	600 m³/h - 73 db(A)	---	650 m³/h - 75 db(A)
CT35 PRO 90 cm	A	255 m³/h - 50 db(A)	420 m³/h - 60 db(A)	650 m³/h - 69 db(A)	---	750 m³/h - 73 db(A)

4.6

Tutto sulle performance.
Performance details.

	ENERGY CLASS	1 SPEED (AIRFLOW-NOISE)	2 SPEED (AIRFLOW-NOISE)	3 SPEED (AIRFLOW-NOISE)	4 SPEED * (AIRFLOW-NOISE)	5 SPEED * (AIRFLOW-NOISE)
CT35 PRO 120 cm	A	265 m³/h - 52 db(A)	430 m³/h - 60 db(A)	650 m³/h - 69 db(A)	---	780 m³/h - 74 db(A)
CT35 PRO GME	B	215 m³/h - 41 db(A)	405 m³/h - 59 db(A)	550 m³/h - 67 db(A)	---	610 m³/h - 70 db(A)
Elite 14 PLUS	C	272 m³/h - 60 db(A)	336 m³/h - 66 db(A)	400 m³/h - 70 db(A)	---	---
Elite 14 LX	D	125 m³/h - 46 db(A)	288 m³/h - 57 db(A)	304 m³/h - 62 db(A)	---	---
Elite 26	C	240 m³/h - 44 db(A)	368 m³/h - 54 db(A)	480 m³/h - 61 db(A)	---	581 m³/h - 65 db(A)
Elite 26 PB	C	240 m³/h - 44 db(A)	368 m³/h - 54 db(A)	581 m³/h - 65 db(A)	---	---
Elite 35	A	250 m³/h - 46 db(A)	375 m³/h - 55 db(A)	535 m³/h - 63 db(A)	---	640 m³/h - 67 db(A)
Era	C	125 m³/h - 45 db(A)	155 m³/h - 47 db(A)	224 m³/h - 54 db(A)	---	---
Era C	D	290 m³/h - 62 db(A)	344 m³/h - 66 db(A)	368 m³/h - 67 db(A)	---	---
Era S	B	236 m³/h - 57 db(A)	332 m³/h - 63 db(A)	428 m³/h - 68 db(A)	---	---
Fold	B	225 m³/h - 46 db(A)	355 m³/h - 54 db(A)	580 m³/h - 65 db(A)	---	---
Fold S	B	300 m³/h - 53 db(A)	440 m³/h - 60 db(A)	600 m³/h - 66 db(A)	---	710 m³/h - 70 db(A)
Hidden 2.0	A	300 m³/h - 51 db(A)	420 m³/h - 60 db(A)	600 m³/h - 67 db(A)	---	700 m³/h - 70 db(A)
Hidden Advance Plus	A	180 m³/h - 45 db(A)	275 m³/h - 48 db(A)	405 m³/h - 57 db(A)	---	640 m³/h - 67 db(A)
Lane	B	255 m³/h - 49 db(A)	400 m³/h - 58 db(A)	550 m³/h - 65 db(A)	---	650 m³/h - 68 db(A)
Lane Sensor	B	255 m³/h - 49 db(A)	400 m³/h - 58 db(A)	550 m³/h - 65 db(A)	---	650 m³/h - 68 db(A)
Lever	B	240 m³/h - 46 db(A)	336 m³/h - 54 db(A)	603 m³/h - 67 db(A)	---	---

Approfondimenti.
Learn more.

	AIR OUTLET	REDUCTION 150/125	ODOUR FILTER ALERT	GREASE FILTER ALERT	NON-RETURN VALVE
Boxin	Ø150	■	---	---	---
Boxin Advance	Ø150	■	■	■	■
Boxin Advance Dry	Ø150	■	■	■	■
Boxin Advance Plus	Ø150	■	■	■	■
Boxin Lx	Ø150	■	---	---	■
Boxin No Drip	Ø150	■	■	■	---
Boxin Plus	Ø150	■	---	---	■
Ciak 2.0	Ø125	---	---	---	■
Ciak 2.0 S	Ø125	---	---	---	■
CT35 PRO	Ø150	---	---	■	■
Elite 14	Ø125	---	---	---	■
Elite 26	Ø125	---	■	■	■
Elite 35	Ø150	---	■	■	■
Era	Ø125	---	---	---	■
Era C	Ø125	---	---	---	■
Era S	Ø125	---	---	---	■
Fold	Ø150	■	---	---	■
Fold S	Ø150	■	---	---	■
Hidden 2.0	Ø150	■	■	■	■
Hidden ADV Plus	Ø150	■	■	■	■
Lane	Ø150	■	■	■	■
Lane Sensor	Ø150	■	■	■	■
Lever	Ø150	---	---	---	■