


Cappe/ Parete

4.1

Hoods/ Wall-mounted

Se cercate una cappa aspirante a muro siete nel posto giusto. Anche perché funzionano anche senza canna fumaria e scarico fumi verso l'esterno: assorbono vapori, odori, allergeni e restituiscono solo aria pulita.

If you are looking for a wall-mounted hood, you are in the right place. And what's more, they can also work without a chimney, and without exhausting fumes to the outside: they capture vapours, odours and allergens, putting clean air back into the room.

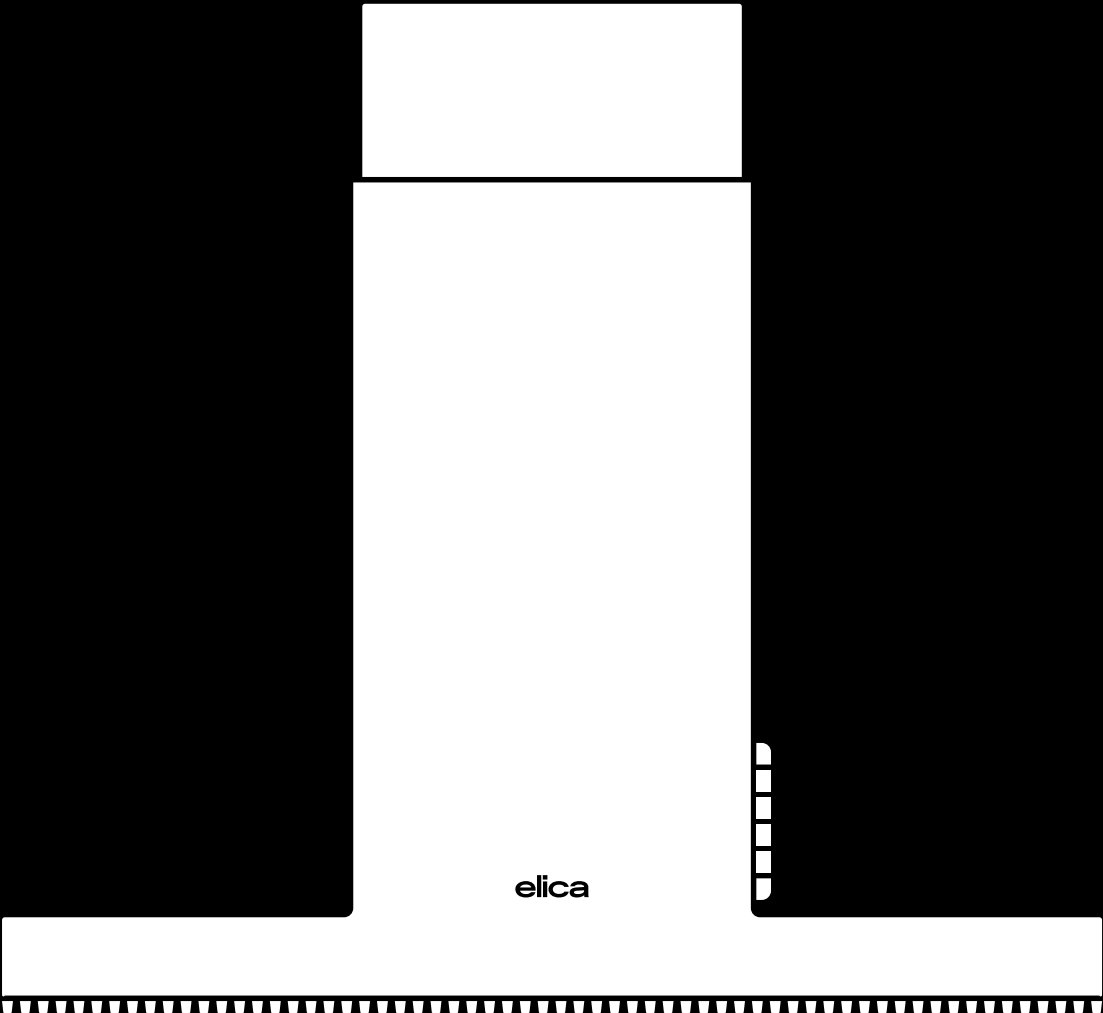

elica

Open Suite

Design Fabrizio Crisà

AWARDS





Contenuti aggiuntivi
More info

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
Gas	65 cm
Induzione/Radiante Induction/Radiant	55 cm

MATERIALI & DIMENSIONI
SIZE & MATERIALS

80 - 160 cm

Filtrante Filtering
Nero effetto soft touch Black soft touch effect

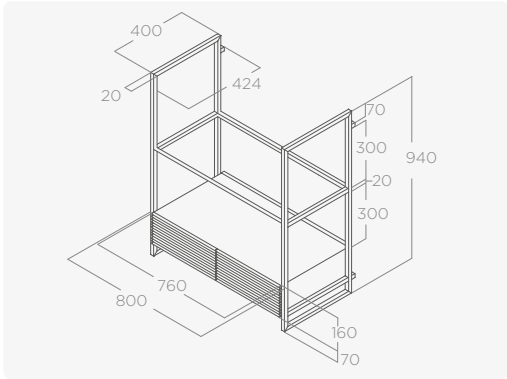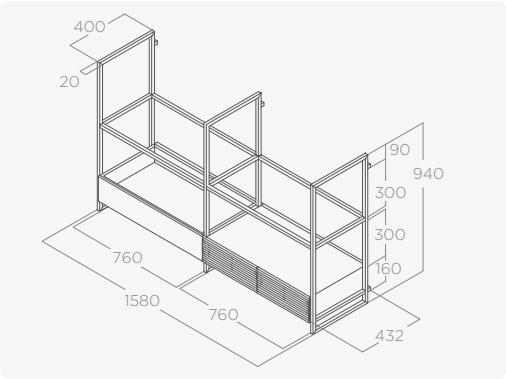

Questo sistema aspirante modulare e personalizzabile vi consente di realizzare la composizione desiderata scegliendo tra moduli aspiranti, pannelli luminosi e ripiani. Le finiture di questi ultimi sono tante: vetro (chiaro o fumè), metallo, rete metallica, legno di noce o anche personalizzate nello stile della vostra cucina. I filtri sono rigenerabili fino a 3 anni; il pannello a led può modulare intensità e colore della luce (dai toni freddi a quelli più caldi). Tramite assistente vocale o app Elica potrete accendere o spegnere la cappa, regolarne la potenza, monitorare l’efficienza dei filtri e contattare immediatamente la nostra assistenza.

This modular and customisable extraction system allows you to select the exact configuration you desire, including extraction units, light panels, and shelving. The finishes of these are many: glass (clear or smoke), metal, metal wire mesh, walnut wood, or even customised to match the style of your kitchen. The filters are regenerable for up to 3 years; the LED panel can adjust the light's intensity and temperature (from cooler to warmer tones). Through a voice assistant or the Elica app, you can switch the hood on or off, adjust the power setting, monitor the condition of the filters, and immediately contact our service centre.



ILLUMINAZIONE LIGHTING	
Tipo Type	Led Panel 1×21W (80cm) - 2×21W (160cm)
Intensità Intensity	758 LUX (80cm) - 844 LUX (160cm)
Temperatura Temperature	2700K - 5200K
Filtro grassi alluminio incluso Aluminium grease filter included Filtro carbone rigenerabile incluso Regenerable charcoal filter included	

FUNZIONI FEATURES	
Long Life Filter	Dim Light
Easy to Maintain	Connectivity
Tune White	Maintenance Alarm

PERFORMANCE PERFORMANCE	
Comandi Controls	Pulsantiera elettronica 3V+2I 3S+2B Electronic push button
Portata intensiva Booster airFlow	500 m³/h
Livello sonoro min-max Noise level min-max	63-69 db(A)
Assorbimento totale Total absorption	261 W (80cm) - 282 W (160cm)

ACCESSORI ACCESSORIES	
Filtro carbone rigenerabile (2 pz) Regenerable charcoal filter (2 pcs)	KIT0166765
Kit modulo aspirante Extraction module kit	KIT0167073A
Kit modulo full Led Full LED module kit	KIT0166964A
Kit mensola vetro extra-chiaro Extra-clear glass shelf kit	KIT0166455
Kit mensola vetro fumé Smoked glass shelf kit	KIT0166463
Kit mensola metallo nero Black metal shelf kit	KIT0166470
Kit mensola rete metallica Wire mesh shelf kit	KIT0166472
Kit mensola legno Wooden shelf kit	KIT0166475
Kit traliccio Trellis expansion kit	KIT0166963
Kit cornice mensola Shelf frame kit	KIT0166768

MODELLI MODELS	
OPEN SUITE BL MAT/F/80	PRF0166703A
OPEN SUITE BL MAT/F/160	PRF0167007A

Modello non soggetto a certificazione energetica obbligatoria. (*)
Model not subject to compulsory energy certification. (*)

4.1

Accessori Open Suite.

Open Suite accessories.

Elica mette a disposizione una gamma completa di accessori strutturali ed estetici per integrare al meglio la cappa in ogni spazio cucina. Gli accessori si possono abbinare tra loro e vengono venduti separatamente.

Elica offers a complete range of structural accessories and embellishments to make your hood perfectly harmonize with your kitchen space. The accessories can be mixed and matched and are sold separately.

Infinite composizioni.

Grazie ai numerosi accessori disponibili, si possono realizzare infinite composizioni. Si parte dalle due versioni base, ordinabili a catalogo, e si progettano soluzioni personalizzate in base all’architettura, allo stile e alle necessità.

Endless combinations.

Thanks to the wide variety of accessories available, you can create endless combinations. It all starts with the two standard versions available in the catalogue. Then you can move on to create customised solutions based on your kitchen layout and style, to best suit your needs.



OPEN SUITE BL/F/80 PRF0166703A
Modulo cappa + 1 mensola in vetro chiaro (80cm)
Hood module + 1 shelf in clear glass (80cm)



OPEN SUITE BL/F/160 PRF0167007A
1 modulo cappa + 1 modulo luce + 2 mensole in vetro chiaro (160cm)
1 hood module + 1 light module + 2 shelves in clear glass(160cm)

Alcune idee di composizione per soluzioni a parete.




Several creative solutions.

Mensole. Shelves.

Partendo dalle due versioni base, è possibile personalizzare Open Suite anche in altezza, aggiungendo o sostituendo i ripiani.



Starting from the two standard versions, you can also personalise the height of Open Suite by adding or replacing shelves.

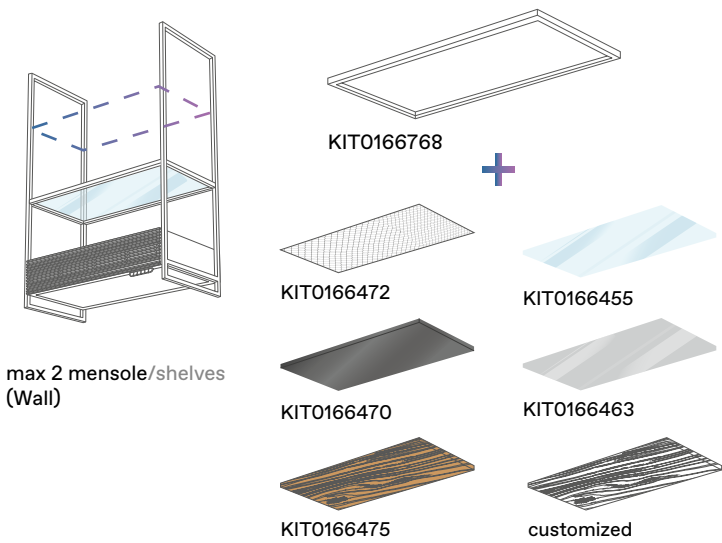

Moduli luce. Modules and lighting.

Open Suite è personalizzabile anche in larghezza, aggiungendo moduli cappa, moduli luce o mensole.

You can also personalise the width of Open Suite by adding hood units, lighting modules, or shelves.

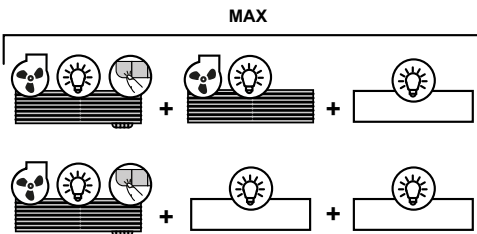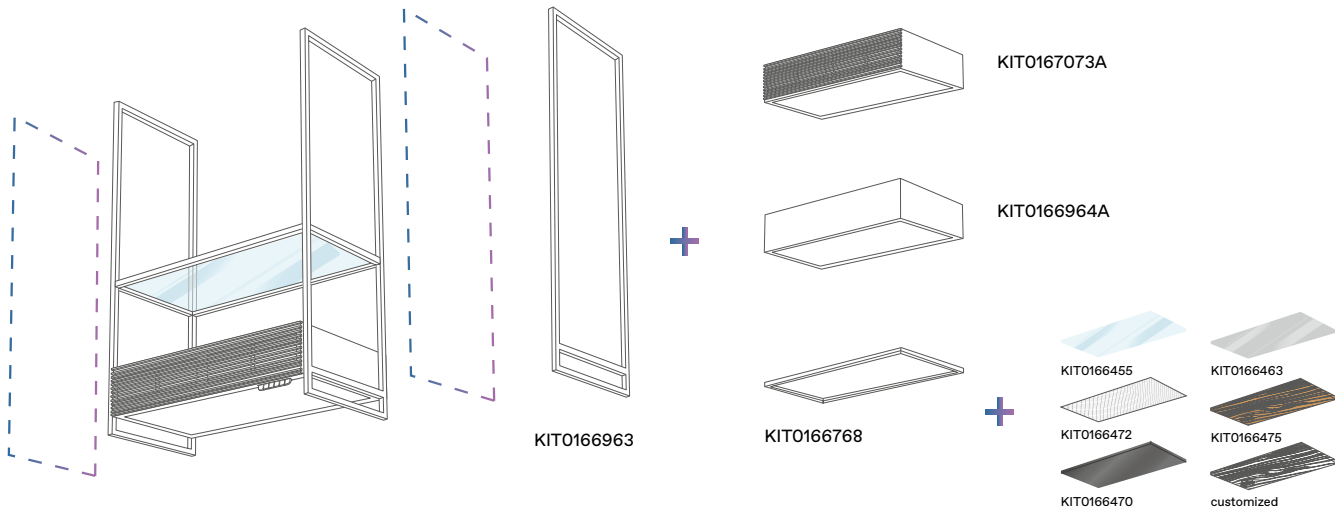

È possibile collegare elettricamente fino a un massimo di 3 moduli, secondo la tipologia e l’ordine descritto nello schema qui a fianco. Non c’è un limite massimo per il montaggio di mensole accessorie di ogni tipologia.

You can electrically connect up to 3 modules together, according to the type and order described in the diagram shown here. You can add unlimited shelves in various materials, colours, and finishes.



Showcasing
Open Suite

Nuage


Design Fabrizio Crisà

AWARDS



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
Gas Gas	65 cm
Induzione/Radiante Induction/Radiant	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS	
75 cm	
Filtrante Filtering	
Acciaio inox + bianco verniciabile Stainless steel + paintable white	

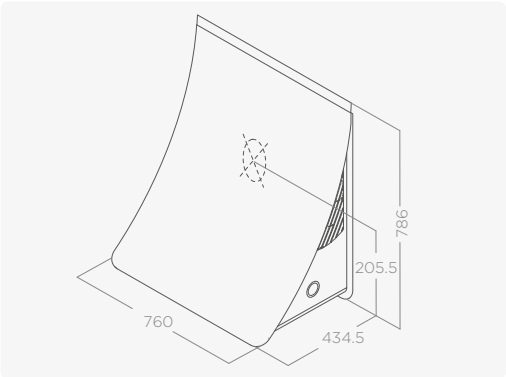

Il pannello esterno di Nuage è rivestibile con cartongesso, piastrelle o vernice per creare una simbiosi perfetta tra la cappa e l'ambiente in cui è inserita.
Nuage è disponibile in versione filtrante, ma può diventare aspirante con installazione in back aspiration. Dotata di comando rotativo elettronico intuitivo, con motore high performance e high efficiency e illuminazione strip LED.

The external panel of Nuage can be covered with plasterboard, tiles or paint to perfectly meld with the surrounding space. Nuage is a filtering hood that can be converted into duct-out mode with back-aspiration installation. It is equipped with intuitive electronic rotary control, high performance motor and high efficiency LED strip lighting.



ILLUMINAZIONE LIGHTING	
Tipo Type	Strip Led 1x7 W
Intensità Intensity	141 LUX
Temperatura Temperature	3500 K
Filtro grassi inox incluso Stainless steel grease filter included	
Filtro carbone incluso Charcoal filter included	

FUNZIONI FEATURES	
Long Life Filter	Back Aspiration
Total Integration	Maintenance Alarm

PERFORMANCE PERFORMANCE	
Comandi Controls	Rotativo elettronico 3V+I 3S+B Electronic rotative
Portata intensiva Booster airFlow	580 m³/h
Livello sonoro min-max Noise level min-max	49-62 db(A)
Assorbimento totale Total absorption	227 W

ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221

MODELLI MODELS	
NUAGE PAINTABLE/F/75	PRF0098374

Showcasing
Nuage



Rules

Design Fabrizio Crisà

AWARDS



Contenuti aggiuntivi
More info

CLASSE ENERGETICA	A
ENERGY CLASS	

DISTANZA MIN DAL PIANO COTTURA	
MIN DISTANCE FROM HOB	

Gas	65 cm
Gas	


Induzione/Radiante	50 cm
Induction/Radiant	

MATERIALI & DIMENSIONI
SIZE & MATERIALS

60 - 90 - 120 cm

Filtrante
Filtering

Vetro nero, Dekton nero “sirius”, rivestibile
Black glass, “Sirius” black Dekton, coverable

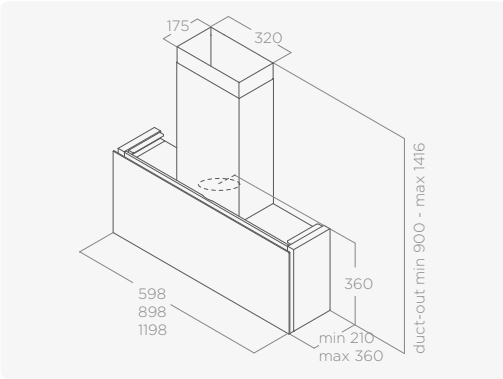

Un meccanismo speciale permette di modulare esattamente la sua profondità (da 21cm a 36cm) offrendo infinite possibilità di installazione, tutte a filo dei vostri desideri. È disponibile in tre finiture: vetro temperato nero, Dekton® Nero Sirius (composto da materiali ad elevata resistenza ai raggi UV, ai graffi e alle macchie); Naked, che permette di rivestire la cappa con lo stesso materiale delle ante dei vostri pensili. Le griglie inclinate brevettate raccolgono le gocce di condensa e le convogliano all'interno di una vaschetta, rimovibile e lavabile.

A special mechanism enables exact adjustment of the hood's depth (from 21cm to 36cm), providing a wide array of installation options to match your specific needs. It is available in three finishes: black tempered glass, Dekton® Nero Sirius (composed of highly UV resistant, scratch and stain resistant materials); and Naked, which allows the hood to be covered with the same material as your kitchen cabinets. The patented inclined grilles collect condensation drops and convey them into a removable and washable tray.



ILLUMINAZIONE
LIGHTING

Tipo	Strip Led 2x7 W (DEKT - NAKED)
Type	Strip Led 1x7 W (BL)
Intensità	365 (BL) - 370 LUX (60cm DEKT - 60cm NAKED) - 310 (90-120 cm DEKT - 90-120 cm NAKED) LUX
Intensity	
Temperatura	3500 K
Temperature	

Filtro grassi inox incluso
Stainless steel aluminium filter included
Filtro carbone rigenerabile incluso
Regenerable charcoal filter included

FUNZIONI
FEATURES

Long Life Filter	Special Material	Comfort Silence
Total Integration	Maintenance Alarm	Connectivity*
Easy to Maintain	No Drip System	Delay Switch Off*
Dim Light*	Multi Connection*	

PERFORMANCE
PERFORMANCE


	BL	DEKT/NAKED
Comandi	Touch control	Pulsantiera
Controls	capacitivo 3V+I	elettronica 3V+I
	3S+B Capacitive Touch- control	3S+B Electronic push button
Portata intensiva	700 m³/h	700 m³/h
Booster airflow		
Livello sonoro min-max	40-58 db(A)	40-58 db(A)
Noise level min-max		
Assorbimento totale	277 W	280 W
Total absorption		

ACCESSORI
ACCESSORIES

Filtro carbone rigenerabile (**)	CFC0166361
Regenerable charcoal filter (**)	
Kit camino inox	KIT0171543
Stainless steel chimney kit	
Kit camino nero	KIT0166364
Black chimney kit	
(**) per versione 60 ordinare 2 pezzi for version 60, order 2 pieces	
(**) per versione 90 ordinare 3 pezzi for version 90, order 3 pieces	
(**) per versione 120 ordinare 4 pezzi for version 120, order 4 pieces	

MODELLI
MODELS

RULES @ BL/F/60 (*)	PRF0163752A
RULES @ BL/F/90 (*)	PRF0163751A
RULES @ BL/F/120 (*)	PRF0163753A
RULES DEKT/F/60	PRF0163755
RULES DEKT/F/90	PRF0163754
RULES DEKT/F/120	PRF0163756
RULES NAKED/F/60	PRF0163758
RULES NAKED/F/90	PRF0163757
RULES NAKED/F/120	PRF0163759

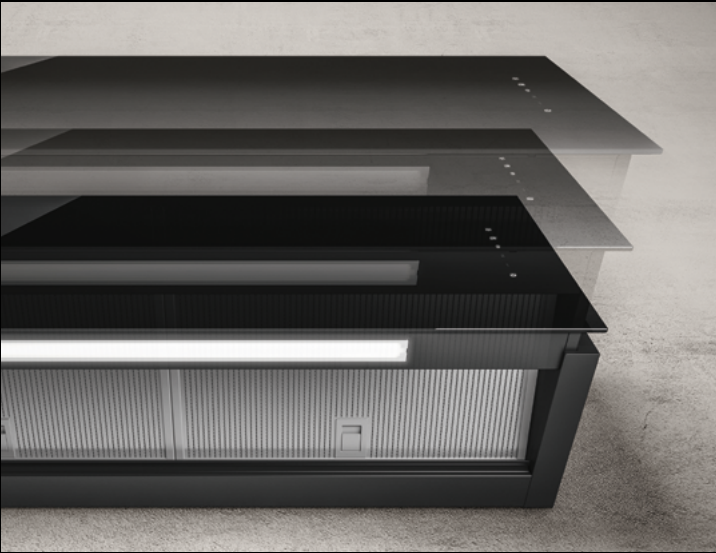

Showcasing
Rules

Super Plat

Design Fabrizio Crisà

AWARDS



reddot award 2021 winner

CLASSE ENERGETICA
ENERGY CLASS

A++

DISTANZA MIN DAL PIANO COTTURA
MIN DISTANCE FROM HOB

Gas65 cm

Induzione/Radiante
Induction/Radiant


50 cm

MATERIALI & DIMENSIONI
SIZE & MATERIALS

80 cm

Filtrante
Filtering

Vetro nero, vetro grigio + effetto ghisa
Black glass, grey glass + cast iron effect

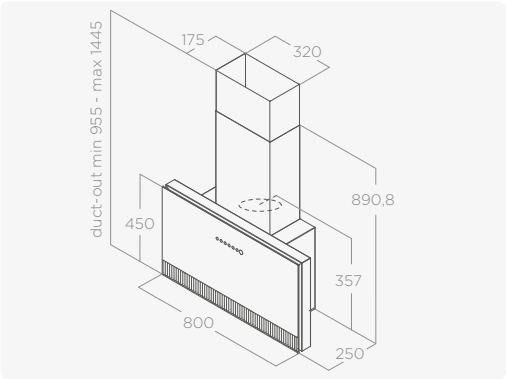

Questa cappa ubbidisce ai vostri comandi in modo intuitivo e semplicissimo: tramite l’app Elica (con cui è anche possibile verificare lo stato di efficienza dei filtri e contattare la nostra assistenza) oppure tramite assistente vocale. Il motore di nuova generazione garantisce massima silenziosità anche alla massima potenza, abbattendo i consumi energetici. La combinazione unica di forme e materiali la rende facilmente adattabile a ogni stile di arredo, sia come elemento a sé sia inserita nei pensili. È disponibile in vetro nero o vetro grigio combinati con elementi a effetto ghisa, di grande personalità.

This hood ‘obeys’ your commands in an intuitive and user-friendly way: via the Elica app (which also lets you check the condition of the filters and contact our service centre) or, if you prefer, via voice assistant. The latest generation motor ensures whisper-quiet operation even on the highest power setting, and reduces energy consumption. The unique combination of shapes and materials make it fit beautifully into any interior design style, be it as a standalone piece or built into your cabinets. Available in black or grey glass, complemented by cast-iron effect elements, it offers a striking visual impact.



Contenuti aggiuntivi
More info



ILLUMINAZIONE
LIGHTING

Tipo
Type

Strip Led 1x7 W

Intensità
Intensity

253 LUX

Temperatura
Temperature

3500 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Filtro carbone rigenerabile incluso
Regenerable charcoal filter included

ACCESSORI
ACCESSORIES

Filtro carbone rigenerabile (*)
Regenerable charcoal filter (*)

CFC0140423

Kit camino inox
Stainless steel chimney kit

KIT0171543

Kit camino nero
Black chimney kit

KIT0166364

(*) ordinare 3 pezzi order 3 pieces

FUNZIONI
FEATURES

- Long Life Filter
- Perimeter Aspiration
- Comfort Silence
- Dim Light
- Maintenance Alarm
- Connectivity
- Easy to Maintain
- Delay Switch Off
- Multi Connection
- Brushless

PERFORMANCE
PERFORMANCE

Comandi
Controls

Touch control capacitivo 3V+I
3S+B Capacitive touch control

Portata intensiva
Booster airFlow

700 m³/h

Livello sonoro min-max
Noise level min-max

45-56 db(A)

Assorbimento totale
Total absorption

177 W

MODELLI
MODELS

SUPER PLAT @ BL/F/80

PRF0164980A

SUPER PLAT @ GR/F/80

PRF0165017A



Showcasing
Super Plat

Plat

Design Fabrizio Crisà



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm

MATERIALI & DIMENSIONI SIZE & MATERIALS
--

55 - 80 cm

Filtrante Filtering

Vetro nero, vetro bianco
Black glass, white glass


ILLUMINAZIONE LIGHTING

Tipo Type	Strip Led 1x7 W
--------------	-----------------

Intensità Intensity	365 LUX
------------------------	---------

Temperatura Temperature	3500 K
----------------------------	--------

Filtro grassi alluminio incluso
Aluminium grease filter included
Filtro carbone rigenerabile incluso
Regenerable charcoal filter included

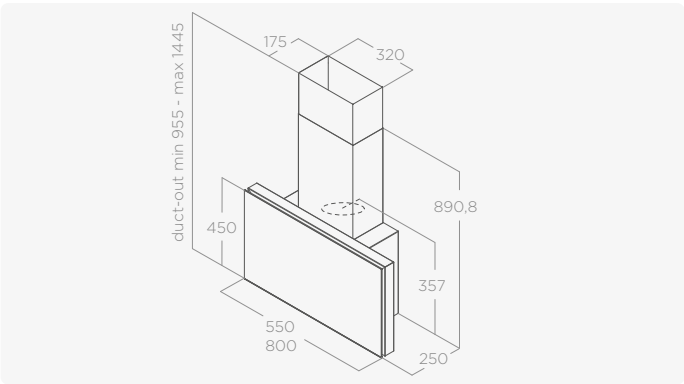

PERFORMANCE PERFORMANCE

Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control
---------------------	--

Portata intensiva Booster airflow	710 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	37-57 db(A)
---	-------------

Assorbimento totale Total absorption	277 W
---	-------

FUNZIONI FEATURES

- Long Life Filter
- Perimeter Aspiration
- Comfort Silence
- Dim Light
- Maintenance Alarm
- Connectivity
- Easy to Maintain
- Multi Connection
- Delay Switch Off

ACCESSORI ACCESSORIES

Filtro carbone rigenerabile (*) Regenerable charcoal filter (*)	CFC0140423
--	------------

Kit camino inox Stainless steel chimney kit	KIT0171543
--	------------

Kit camino nero Black chimney kit	KIT0166364
--------------------------------------	------------


(*) per versione 55 ordinare 2 pezzi for version 55, order 2 pieces
(*) per versione 80 ordinare 3 pezzi for version 80, order 3 pieces

MODELLI MODELS

PLAT @ BL/F/55	PRF0164946A
PLAT @ BL/F/80	PRF0164874A
PLAT @ WH/F/55	PRF0165707A
PLAT @ WH/F/80	PRF0165712A

Aplomb

Design Fabrizio Crisà

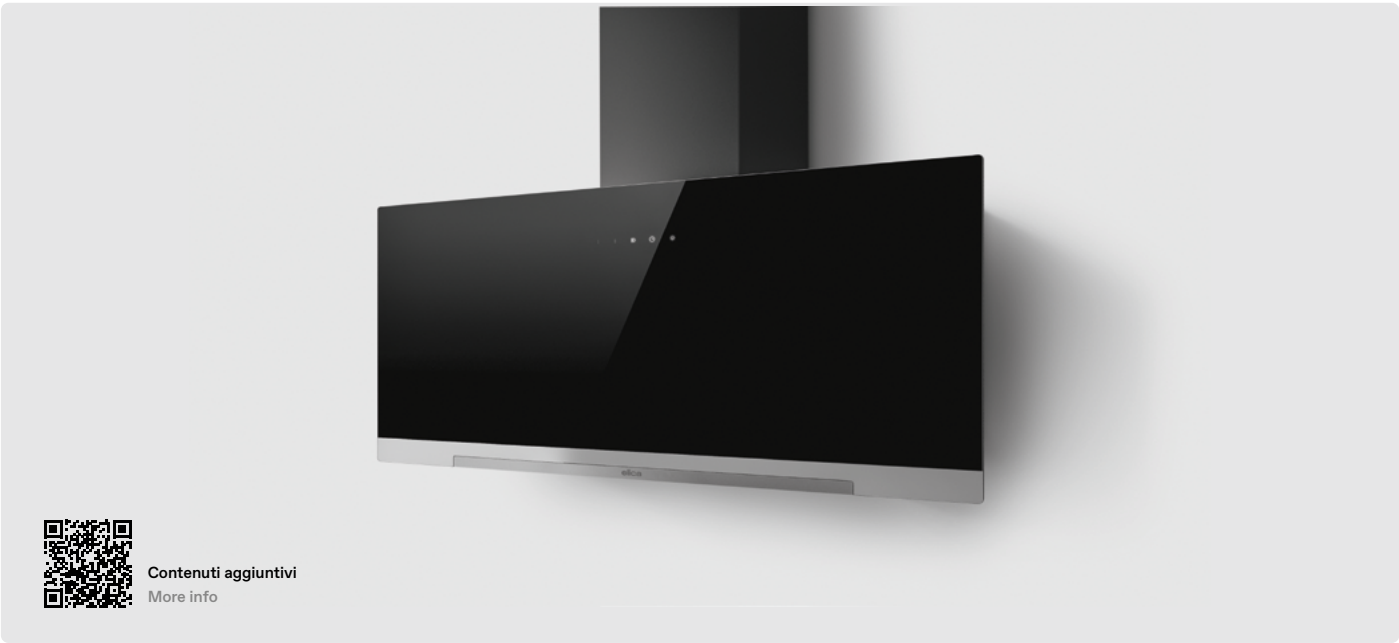

Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	45 cm

MATERIALI & DIMENSIONI SIZE & MATERIALS
--

60 - 90 cm

Aspirante Duct-out

Vetro nero, vetro bianco
Black glass, white glass


ILLUMINAZIONE LIGHTING

Tipo Type	Strip Led 1x3 W
--------------	-----------------

Intensità Intensity	84 LUX
------------------------	--------

Temperatura Temperature	3500 K
----------------------------	--------

Filtro grassi alluminio incluso
Aluminium grease filter included
Camino incluso
Chimney included

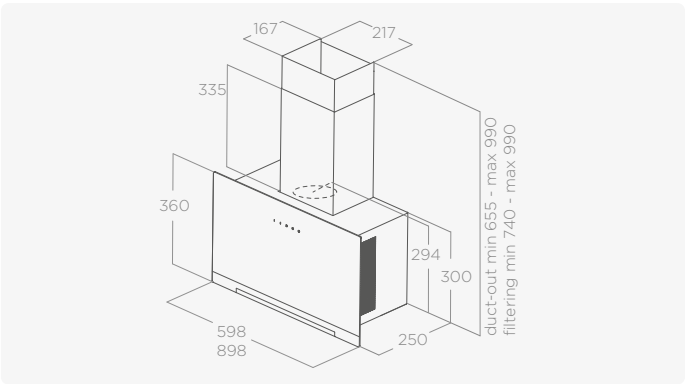

PERFORMANCE PERFORMANCE

Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control
---------------------	--

Portata intensiva Booster airflow	680 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	51-64 db(A)
---	-------------

Assorbimento totale Total absorption	233 W
---	-------

FUNZIONI FEATURES

- Long Life Filter
- Maintenance Alarm
- Easy to Maintain
- Delay Switch Off

ACCESSORI ACCESSORIES

Filtro carbone Charcoal filter	CFC0140343
-----------------------------------	------------

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
--	------------

Kit prima installazione filtrante First installation filtering kit	KIT0160286
---	------------

Kit estensione camino H66 nero Black extension chimney kit H66	KIT0198956
---	------------

Kit estensione camino H66 bianco White extension chimney kit H66	KIT0198957
---	------------

MODELLI MODELS


APLOMB BL/A/60	PRF0166938
APLOMB BL/A/90	PRF0166939
APLOMB WH/A/60	PRF0166940
APLOMB WH/A/90	PRF0166941

Bloom-S

Design Fabrizio Crisà



CLASSE ENERGETICA ENERGY CLASS		A++	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas	Induzione/Radiante	
	Gas	Induction/Radiant	
	55 cm	45 cm	
MATERIALI & DIMENSIONI SIZE & MATERIALS			
85 cm			
Aspirante Duct-out			
Vetro bianco, Dekton nero "sirius" White glass, "Sirius" black Dekton			
ILLUMINAZIONE LIGHTING			
Tipo Type	Strip Led 1x7 W		
Intensità Intensity	309 LUX		
Temperatura Temperature	3000 K		
Filtro grassi alluminio 9 strati incluso 9-layer aluminium grease filter included			
Camino incluso Chimney included			

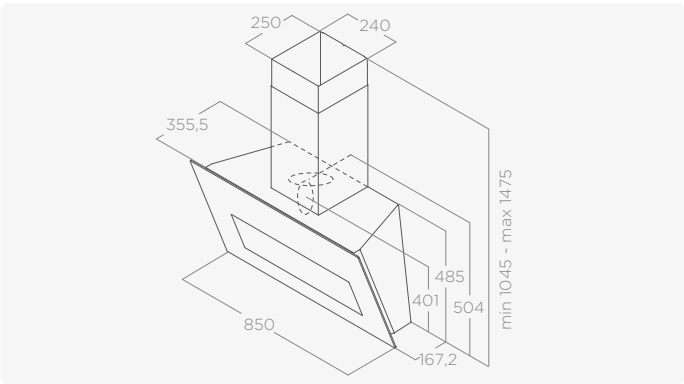


Bloom

Design Fabrizio Crisà



CLASSE ENERGETICA ENERGY CLASS		A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas	Induzione/Radiante	
	Gas	Induction/Radiant	
	55 cm	45 cm	
MATERIALI & DIMENSIONI SIZE & MATERIALS			
85 cm			
Aspirante Duct-out			
Vetro nero, vetro grigio Black glass, grey glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Strip Led 1x7 W		
Intensità Intensity	253 LUX		
Temperatura Temperature	3000 K		
Filtro grassi alluminio 9 strati incluso 9-layer aluminium grease filter included			
Camino incluso Chimney included			

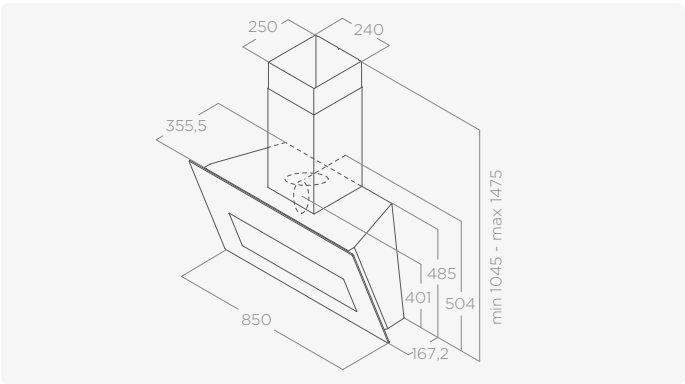

Om Air


Elica Design Center

AWARDS



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A++
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
Gas Gas	55 cm
Induzione/Radiante Induction/Radiant	40 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS	
75 cm	
Filtrante Filtering	
Vetro bianco, vetro nero White glass, black glass	

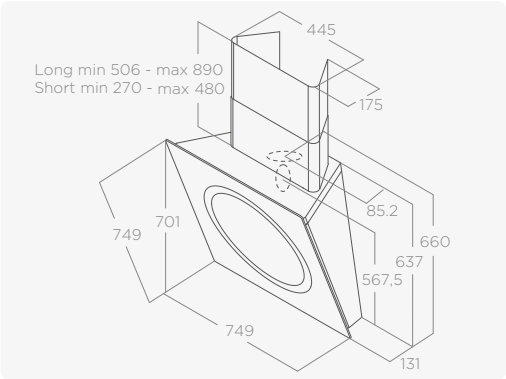

Disponibile in vetro nero o bianco, Om Air ha l'aspirazione perimetrale. Il design esclusivo, l'innovativo filtro antiodori in poliuretano e l'illuminazione strip LED fanno di questa cappa un prodotto che, nella sua semplicità, si propone ancora una volta come iconico e ad alte performance.

In black or white glass, with perimeter aspiration, Om Air is enriched with an innovative polyurethane anti-odor filter and LED strip lights. Om Air is an ergonomic item, a style reference, a perfect synthesis of design and technology.



ILLUMINAZIONE LIGHTING	
Tipo Type	Strip Led 1x7 W
Intensità Intensity	421 LUX
Temperatura Temperature	3500 K
Filtro grassi alluminio incluso Aluminium grease filter included Filtro carbone rigenerabile incluso Regenerable charcoal filter included	

- FUNZIONI
FEATURES
- Long Life Filter
 - Perimeter Aspiration
 - Comfort Silence
 - Dim Light
 - Maintenance Alarm
 - Connectivity
 - Delay Switch Off
 - Multi Connection
 - Brushless
 - Easy to Maintain

PERFORMANCE PERFORMANCE	
Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control
Portata intensiva Booster airFlow	700 m³/h
Livello sonoro min-max Noise level min-max	48-60 db(A)
Assorbimento totale Total absorption	177 W

ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
Kit camino lungo Long chimney kit	KIT0010439
Kit camino corto Short chimney kit	KIT0010700

MODELLI MODELS	
OM AIR @ WH/F/75	PRF0094734A
OM AIR @ BL/F/75	PRF0094744A



Showcasing
Om Air




Majestic No-Drip

Design Fabrizio Crisà



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS		A
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		
Gas	60 cm	
Induzione/Radiante Induction/Radiant	40 cm	
MATERIALI & DIMENSIONI SIZE & MATERIALS		
60 - 90 cm		
Aspirante Duct-out		
Vetro nero + acciaio inox Black glass + stainless steel		

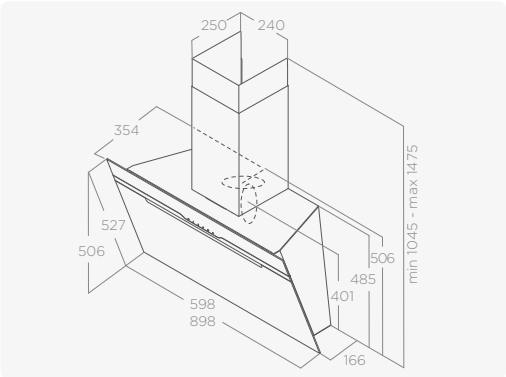

Majestic No Drip è dotata di un innovativo sistema di resistenze che permette al vetro di riscaldarsi resolvendo definitivamente il problema delle gocce di condensa che potrebbero formarsi a causa dei vapori provenienti dal piano cottura a induzione. Majestic No Drip, il segreto per una cucina sempre pulita.

Majestic No Drip is equipped with innovative heating elements that heat the glass that heats the glass, eliminating the problem of condensation droplets that can form due to steam rising from the induction hob. Majestic No Drip, the key to keeping your kitchen spick and span.



ILLUMINAZIONE LIGHTING		ACCESSORI ACCESSORIES	
Tipo Type	Strip Led 1x7 W	Filtro carbone Charcoal filter	CFC0140343
Intensità Intensity	253 LUX	Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
Temperatura Temperature	3000 K	Radiocomando Design bianco White Design remote control	KIT0121468
Filtro grassi alluminio incluso Aluminium grease filter included Camino incluso Chimney included		Radiocomando Design nero Black Design remote control	KIT0121469
FUNZIONI FEATURES			
Long Life Filter Back Aspiration No Drip System Easy to Maintain Maintenance Alarm			

PERFORMANCE PERFORMANCE		MODELLI MODELS	
Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control	MAJESTIC NO DRIP BL/A/60	PRF0147731
Portata intensiva Booster airFlow	600 m³/h	MAJESTIC NO DRIP BL/A/90	PRF0147732
Livello sonoro min-max Noise level min-max	46-60 db(A)		
Assorbimento totale Total absorption	207 W		

Just Dry

Design Fabrizio Crisà



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A
-----------------------------------	---

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
---	--

Gas Gas	60 cm
------------	-------


Induzione/Radiante Induction/Radiant	45 cm
---	-------

MATERIALI & DIMENSIONI SIZE & MATERIALS	
--	--

55 - 80 cm

Aspirante Duct-out	
-----------------------	--

Vetro nero Black glass	
---------------------------	--

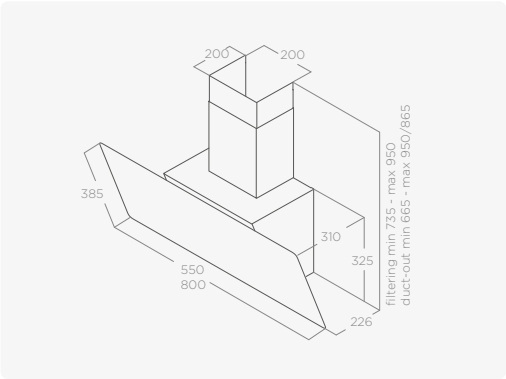

Questa cappa a parete dal design minimal risolve per sempre il problema dello sgocciolio sul piano a induzione. Dispone di un timer con cui programmare lo spegnimento automatico del sistema aspirante, che può essere ritardato anche dopo che avete finito di cucinare (in modo da eliminare completamente odori e vapori residui). È anche possibile regolare l’intensità dell’illuminazione, pulire facilmente l’elettrodomestico e monitorare in tempo reale lo stato dei filtri anti-odore, che possono durare fino a 3 anni (la media sul mercato è di 3-6 mesi). Il pannello di controllo vi consente un’esperienza di utilizzo molto intuitiva, per regolare la potenza di aspirazione e le altre funzioni in modo immediato.

This wall-mounted hood with a minimalist design puts an end to the problem of drips on the induction hob. It has a timer to schedule the automatic shutoff of the extraction system, which can be delayed even after you’ve finished cooking (to get rid of all lingering odours and vapours). You can adjust the intensity of the lighting, easily clean the appliance, and monitor the condition of the odour filters, which can last up to 3 years (vs. standard filters that last only 3-6 months on average), all in real time. The control panel offers a very intuitive user experience, allowing you to adjust the extraction power and other settings in an instant.



ILLUMINAZIONE LIGHTING	
---------------------------	--

Tipo Type	Led 2×2,5 W
--------------	-------------

Intensità Intensity	381 LUX
------------------------	---------

Temperatura Temperature	3500 K
----------------------------	--------

Filtro grassi alluminio incluso Aluminium grease filter included	
Camino incluso Chimney included	

FUNZIONI FEATURES	
----------------------	--

- Long Life Filter
- Perimeter Aspiration
- No Drip System
- Dim Light
- Maintenance Alarm
- Easy to Maintain
- Delay Switch Off

PERFORMANCE PERFORMANCE	
----------------------------	--

Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control
---------------------	--

Portata intensiva Booster airFlow	670 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	51-63 db(A)
---	-------------

Assorbimento totale Total absorption	275 W
---	-------

ACCESSORI ACCESSORIES	
--------------------------	--

Filtro carbone Charcoal filter	CFC0140343
-----------------------------------	------------

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
--	------------

MODELLI MODELS	
-------------------	--

JUST DRY BL/A/55	PRF0193729
------------------	------------

JUST DRY BL/A/80	PRF0196641
------------------	------------




Showcasing
Just Dry

Majestic

Design Fabrizio Crisà



CLASSE ENERGETICA		B	
ENERGY CLASS			
DISTANZA MIN DAL PIANO COTTURA		Gas	Induzione/Radiante
MIN DISTANCE FROM HOB		Gas	Induction/Radiant
		55 cm	45 cm
MATERIALI & DIMENSIONI			
SIZE & MATERIALS			
60 - 90 cm			
Aspirante			
Duct-out			
Vetro nero + acciaio inox, vetro bianco + acciaio inox			
Black glass + stainless steel, white glass + stainless steel			
ILLUMINAZIONE			
LIGHTING			
Tipo	Led 2x2,5 W		
Type			
Intensità	203 LUX		
Intensity			
Temperatura	3000 K		
Temperature			
Filtro grassi alluminio incluso			
Aluminium grease filter included			
Camino incluso			
Chimney included			

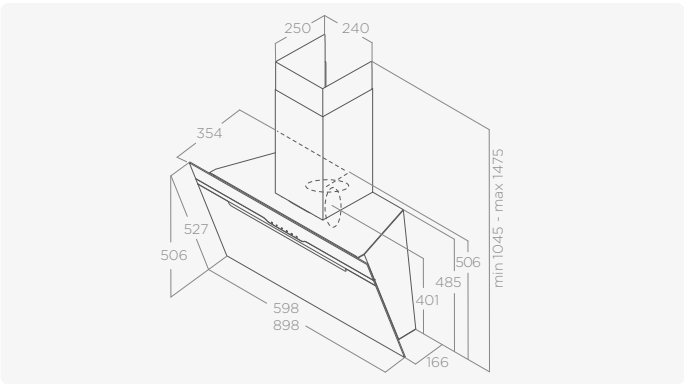


Neat

Design Fabrizio Crisà



CLASSE ENERGETICA ENERGY CLASS		A+ (60cm) / A++ (80-90cm)	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		50 cm	40 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 80 - 90 cm			
Aspirante Duct-out			
Vetro bianco, vetro nero White glass, black glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Strip Led 1x7W		
Intensità Intensity	365 LUX (60 cm) - 372 LUX (80 cm - 90 cm)		
Temperatura Temperature	3000 K		
Filtro grassi alluminio 9 strati incluso 9-layer aluminium grease filter included			
Camino incluso Chimney included			

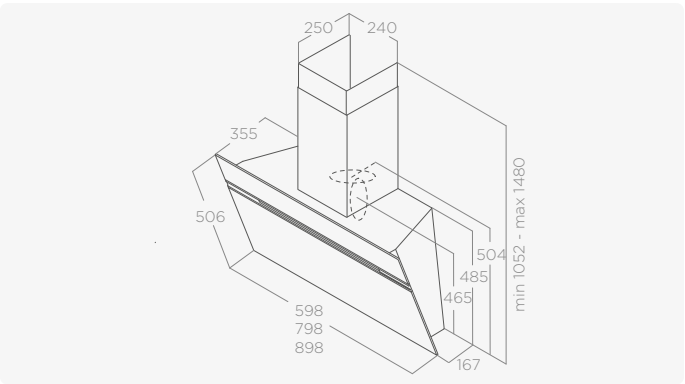

PERFORMANCE PERFORMANCE	
Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control
Portata intensiva Booster airflow	757 m³/h
Livello sonoro min-max Noise level min-max	50-65 db(A)
Assorbimento totale Total absorption	265 W
FUNZIONI FEATURES	
Long Life Filter Back Aspiration Dim Light	
Easy to Maintain Maintenance Alarm Connectivity	
Multi Connection Delay Switch Off	
ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221

MODELLI MODELS	
MAJESTIC @ BL/A/60	PRF0117381B
MAJESTIC @ BL/A/90	PRF0116967B
MAJESTIC @ WH/A/60	PRF0124235B
MAJESTIC @ WH/A/90	PRF0124236B

PERFORMANCE PERFORMANCE	
Comandi Controls	Touch Control Capacitivo 3V+I 3S+B Capacitive touch control
Portata intensiva Booster airflow	650 m³/h (60cm) - 690 m³/h (80cm-90cm)
Livello sonoro min-max Noise level min-max	44-58 db(A) (60cm)- 46-59 db(A) (80cm-90cm)
Assorbimento totale Total absorption	177 W
FUNZIONI FEATURES	
Back Aspiration Comfort Silence Delay Switch Off	
Easy to Maintain Maintenance Alarm Dim Light	
Connectivity Multi Connection Long Life Filter	
Brushless	
ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221


MODELLI MODELS	
NEAT @ BL/A/60	PRF0199509
NEAT @ BL/A/80	PRF0199572
NEAT @ BL/A/90	PRF0199536
NEAT @ WH/A/60	PRF0199573
NEAT @ WH/A/80	PRF0199575
NEAT @ WH/A/90	PRF0199574

Stripe

Design Fabrizio Crisà



CLASSE ENERGETICA ENERGY CLASS		B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		50 cm	40 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 80 - 90 cm			
Aspirante Duct-out			
Vetro nero, vetro bianco Black glass, white glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,5 W		
Intensità Intensity	203 LUX		
Temperatura Temperature	3000 K		
Filtro grassi alluminio incluso Aluminium grease filter included Camino incluso Chimney included			

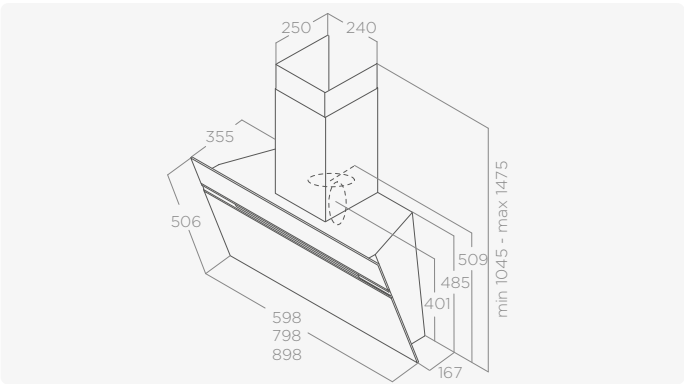


L'Essenza

Elica Design Center



CLASSE ENERGETICA ENERGY CLASS		B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		55 cm	45 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 cm			
Aspirante Duct-out			
Vetro nero, vetro bianco Black glass, white glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,5 W		
Intensità Intensity	145 LUX		
Temperatura Temperature	3000 K		
Filtro grassi alluminio incluso Aluminium grease filter included Camino incluso Chimney included			

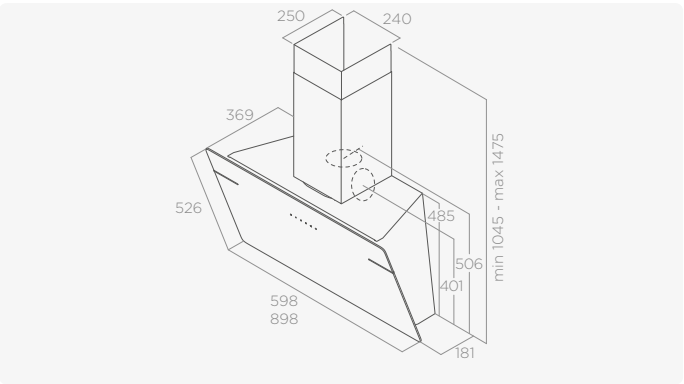

PERFORMANCE		
PERFORMANCE		
BL / WH		
Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control	
Portata intensiva Booster airFlow	691 m³/h	
Livello sonoro min-max Noise level min-max	49 - 65 db(A)	
Assorbimento totale Total absorption	255 W	
FUNZIONI		
FEATURES		
 Long Life Filter	 Back Aspiration	 Easy to Maintain
ACCESSORI		
ACCESSORIES		
Filtro carbone Charcoal filter	CFC0140343	
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221	


MODELLI MODELS	
L'ESSENZA BL/A/60	PRF0117403A
L'ESSENZA BL/A/90	PRF0117374A
L'ESSENZA WH/A/60	PRF0124233A
L'ESSENZA WH/A/90	PRF0124234A

Shy-S

Elica Design Center



CLASSE ENERGETICA ENERGY CLASS		A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	45 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 cm			
Aspirante Duct-out			
Vetro bianco, vetro nero White glass, black glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x1,5 W		
Intensità Intensity	180 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included Camino incluso Chimney included			

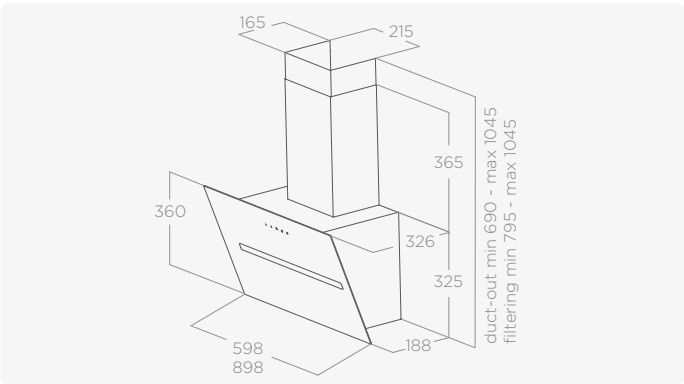


Shire

Design Fabrizio Crisà



CLASSE ENERGETICA ENERGY CLASS		A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	45 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 cm			
Aspirante Duct-out			
Vetro bianco, vetro nero White glass, black glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x1 W		
Intensità Intensity	120 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included			
Camino incluso Chimney included			

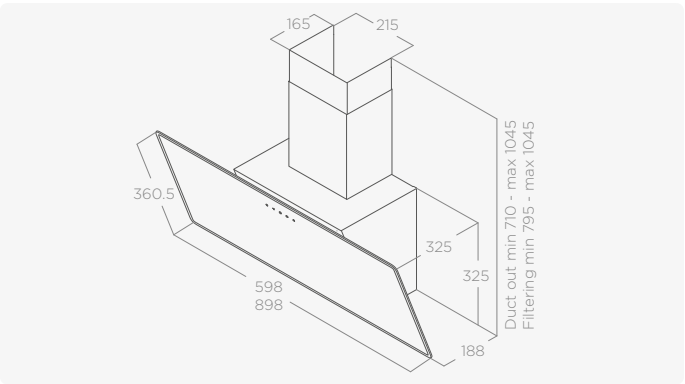

PERFORMANCE	
PERFORMANCE	
Comandi Controls	Touch control capacitivo 2V+I 2S+B Capacitive touch control
Portata intensiva Booster airflow	650 m³/h
Livello sonoro min-max Noise level min-max	52-64 db(A)
Assorbimento totale Total absorption	232 W
FUNZIONI	
FEATURES	
 Long Life Filter  Easy to Maintain  Maintenance Alarm	
 Delay Switch Off	
ACCESSORI	
ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
Kit prima installazione filtrante First installation filtering kit	KIT0160286
Kit estensione camino H66 nero Black extension chimney kit H66	KIT0198956
Kit estensione camino H66 bianco White extension chimney kit H66	KIT0198957
MODELLI	
MODELS	
SHIRE BL/A/60	PRF0119819A
SHIRE BL/A/90	PRF0119829A
SHIRE WH/A/60	PRF0119823A
SHIRE WH/A/90	PRF0119828A

Haiku

Design Fabrizio Crisà

AWARDS



Contenuti aggiuntivi
More info

CLASSE ENERGETICA
ENERGY CLASS

A

DISTANZA MIN DAL PIANO COTTURA
MIN DISTANCE FROM HOB

Gas

65 cm

Induzione/Radiante
Induction/Radiant




50 cm

MATERIALI & DIMENSIONI
SIZE & MATERIALS

32 - 60 - 90 - 120 cm

Aspirante
Duct-out

Vetro nero, Krion bianco
Black glass, white Krion

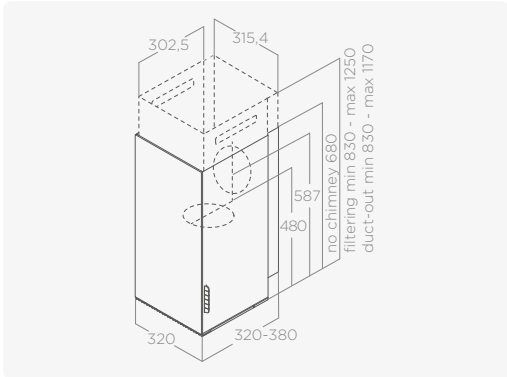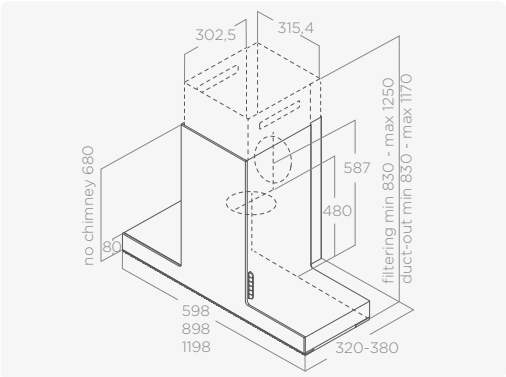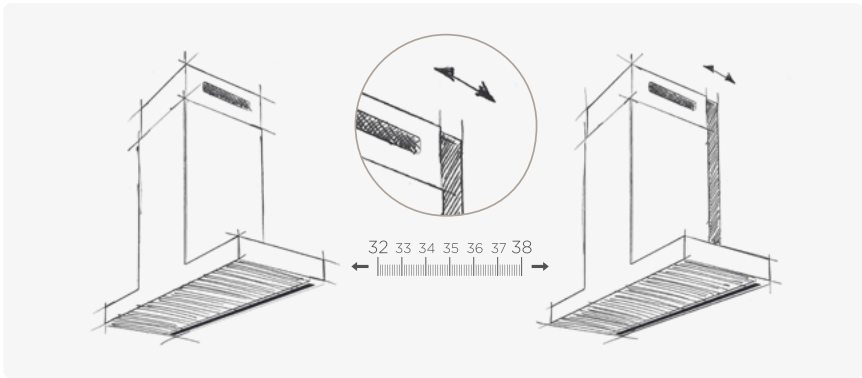

ILLUMINAZIONE
LIGHTING

Tipo
Type

Strip Led 1x7 W

Intensità
Intensity

253 LUX

Temperatura
Temperature

3500 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Camino incluso
Chimney included

FUNZIONI
FEATURES

- Long Life Filter
- Back Aspiration
- Comfort Silence
- Total Integration
- Maintenance Alarm
- Special Material

PERFORMANCE
PERFORMANCE

Comandi
Controls

Pulsantiera elettronica 3V+2I
3S+2B Electronic push button

Portata intensiva
Booster airFlow

690 m³/h

Livello sonoro min-max
Noise level min-max

34-51 db(A)

Assorbimento totale
Total absorption

277 W

ACCESSORI
ACCESSORIES

Filtro carbone
Charcoal filter

CFC0141529A

Filtro carbone rigenerabile
Regenerable charcoal filter

CFC0141725A

MODELLI
MODELS

HAIKU BL/A/32

PRF0146263

HAIKU BL/A/60

PRF0146264

HAIKU BL/A/90

PRF0146265

HAIKU BL/A/120

PRF0146266

HAIKU WH/A/32

PRF0146267

HAIKU WH/A/60

PRF0146268

HAIKU WH/A/90

PRF0146269

HAIKU WH/A/120

PRF0146270



Showcasing
Haiku


Haiku Dry

Design Fabrizio Crisà




Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A+
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
Gas	65 cm
Induzione/Radiante Induction/Radiant	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS	
60 - 90 cm	
Aspirante Duct-out	
Nero effetto ruvido + vetro nero Black rough-touch effect + black glass	

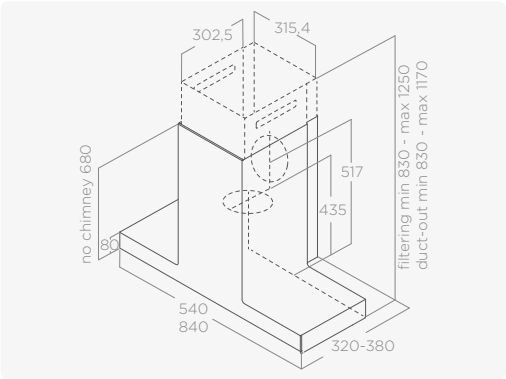

È l’evoluzione massima della prima cappa a profondità regolabile. Garantisce totale linearità con i mobili della vostra cucina integrando funzioni all’avanguardia, sistema anti-condensa, potenza silenziosa, risparmio energetico. Un design squadrato e versatile si sposa a innovazioni che trasformano il cooking in un’esperienza nuova, intuitiva e appagante. Il suo sistema anti-condensa evita la fastidiosa caduta di gocce sul vostro piano a induzione, mantenendolo asciutto. Il motore di ultima generazione assicura massima silenziosità e potenza ai minimi consumi; i filtri possono durare fino a 3 anni (vs una media del mercato di 3-6 mesi); il suo design unico porta in cucina il valore estetico di un autentico elemento di arredo.

It is the ultimate evolution of the first depth-adjustable hood. It seamlessly blends in with your kitchen units, offering advanced features, a no-drip system, silent operation, and energy efficiency. Its square and versatile design paired with innovations is sure to make cooking a new, intuitive, and satisfying experience. Its anti-condensation system prevents water from dripping onto your induction hob, so it stays dry. The latest generation motor delivers unparalleled silence and power with low energy use; the filters can last for up to 3 years (vs. standard filters that must be replaced every 3-6 months); its one-of-a-kind design adds the aesthetic value of a genuine decor element to your kitchen.

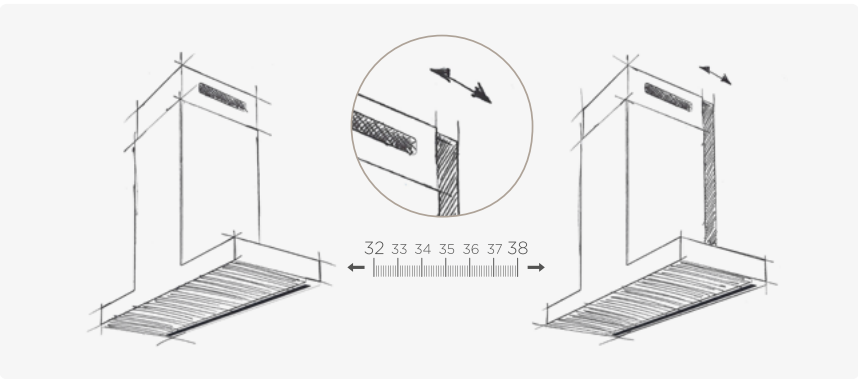

ILLUMINAZIONE LIGHTING		
Tipo Type	Strip Led 1x7 W	
Intensità Intensity	533 (60cm) - 365 (90cm) LUX	
Temperatura Temperature	3500 K	
Filtro grassi acciaio inox nero incluso Black stainless steel grease filter included		
Camino incluso Chimney included		
FUNZIONI FEATURES		
 Long Life Filter	 Back Aspiration	 Comfort Silence
 Dim Light	 Maintenance Alarm	 Connectivity
 Total Integration	 Delay Switch Off	 Multi Connection
 No Drip System	 Brushless	

PERFORMANCE PERFORMANCE	
Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control
Portata intensiva Booster airFlow	680 m³/h
Livello sonoro min-max Noise level min-max	41-57 db(A)
Assorbimento totale Total absorption	177 W

ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221

MODELLI MODELS	
HAIKU DRY @ BLR0/A/60	PRF0196763
HAIKU DRY @ BLR0/A/90	PRF0197397

Bio

Design Fabrizio Crisà

AWARDS



DESIGN AWARD 2017



GOOD DESIGN



reddot award 2017 winner



IDA DESIGN AWARDS GOLD WINNER 2016



ICO 2
NIC 0
AWI 1
ROS 7
INTERIOR INNOVATION
selection



2017 WINNER
EUROPEAN PRODUCT DESIGN AWARD

CLASSE ENERGETICA

ENERGY CLASS

A++

DISTANZA MIN DAL PIANO COTTURA

MIN DISTANCE FROM HOB

Gas

Gas

65 cm

Induzione/Radiante

Induction/Radiant

50 cm

MATERIALI & DIMENSIONI

SIZE & MATERIALS

90 cm

Aspirante


Duct-out

Rovere naturale + bianco effetto soft touch

Nero Effetto Ruvido + Rovere Naturale

Natural oak + white soft touch effect

Natural oak + black rough-touch effect

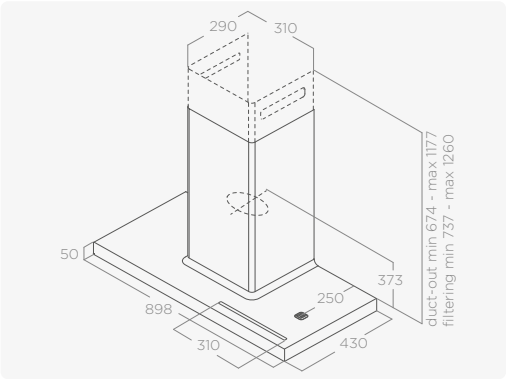

Sia a parete che ad isola, Bio offre il massimo in termini di aspirazione, silenziosità ed efficienza di filtraggio. Il modulo mensola che è possibile aggiungere la rende ancora più versatile. Bio sarà sempre in sintonia con te e i tuoi ambienti, grazie all'innovativa funzione Tune-White, che regola il tono di bianco dell'illuminazione e lo uniforma agli altri punti luce della cucina e grazie al supporto per tablet e smartphone con due prese di ricarica USB. La sensor technology, infine, regola automaticamente la corretta quantità di vapori da aspirare.

This hood becomes a one of a kind element of design, blending together nature with top Elica home technology, in terms of aspiration, noise levels and filtering efficiency. Designed to be either wall mounted or island, Bio is modular and can be adapted thanks to its shelves, which make it completely able to blend in with the rest of the kitchen layout. The innovative feature Tune-White degrees, allows you to regulate the tone of white of the lighting, in order to adapt the hood light with other kitchen lighting, thus creating the best environment according to your taste and needs.



ILLUMINAZIONE LIGHTING	
Tipo Type	Strip Led 1x7 W
Intensità Intensity	113 LUX
Temperatura Temperature	2700 - 6500 K
Filtro grassi alluminio incluso Aluminium grease filter included Camino incluso Chimney included	

- FUNZIONI
FEATURES

 Long Life Filter ++

 Special Material

 Tune White

 Comfort Silence

 Maintenance Alarm

 Easy to Maintain

 Dim Light

 Brushless

PERFORMANCE PERFORMANCE	
Comandi Controls	Pulsantiera elettronica 3V+2I 3S+2B Electronic push button
Portata intensiva Booster airFlow	680 m³/h
Livello sonoro min-max Noise level min-max	44-58 db(A)
Assorbimento totale Total absorption	177 W

ACCESSORI ACCESSORIES	
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0141725A
Kit prima installazione filtrante HP First installation HP filtering kit	KIT0160440
Filtro carbone rigenerabile HP Regenerable charcoal HP filter	CFC0140091
Kit mensola muro rovere 60cm Oak wall shelf kit 60cm	KIT0120946
Radiocomando Design bianco White Design remote control	KIT0121468
Radiocomando Design nero Black Design remote control	KIT0121469

MODELLI MODELS	
BIO WH/A 90 ROVERE	PRF0147266A
BIO BLR0/A 90 ROVERE	PRF0200562



Showcasing
Bio



Sweet

Design Fabrizio Crisà



Contenuti aggiuntivi
More info

AWARDS



CLASSE ENERGETICA ENERGY CLASS	A
-----------------------------------	---

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
---	--


Gas Gas	70 cm
Induzione/Radiante Induction/Radiant	60 cm

MATERIALI & DIMENSIONI SIZE & MATERIALS	
--	--

85 cm

Aspirante Duct-out	
-----------------------	--

Verniciature: bianco opaco, tortora opaco, rame opaco, peltrox, salvia, moon black, sweet embrace, bronzo. peach fuzz
Painted: matt white, matt taupe, matt copper, peltrox, sage, moon black, sweet embrace, bronze, peach fuzz

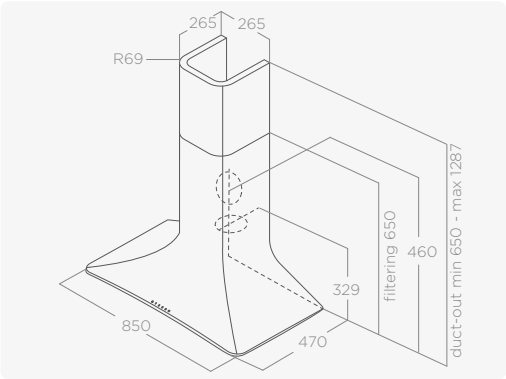

Questa cappa è stampata a iniezione ed è realizzata con un polimero speciale ad alta resistenza al calore, ai vapori e ai grassi. È disponibile in varie finiture per entrare con eleganza in ogni stile di cucina. I filtri anti-odori possono durare fino a 3 anni (vs una media del mercato di 3-6 mesi), il sistema di aspirazione perimetrale è completamente nascosto e la prolunga del camino è ad altezza variabile, per adattarsi a ogni spazio. Potete sceglierla nella versione filtrante o aspirante e gestirla attraverso il comando touch dalla massima intuitività.

This injection moulded kitchen hood is made with a special polymer resistant to heat, vapors, and grease. It is available in various finishes to elegantly complement any kitchen style. The odour filters can last up to 3 years (vs. standard filters that must be replaced every 3-6 months), the perimeter extraction system is completely hidden, and the chimney extension is height-adjustable to fit any space. You can choose either the filtering or duct-out version and operate it using the highly intuitive touch control.



ILLUMINAZIONE LIGHTING	
---------------------------	--

Tipo Type	Strip Led 1x7 W
Intensità Intensity	197 LUX
Temperatura Temperature	4000 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Estensione camino incluso
Extension chimney included

FUNZIONI FEATURES	
----------------------	--

- Long Life Filter
- Special Material
- Back Aspiration
- Perimeter Aspiration
- Maintenance Alarm

PERFORMANCE PERFORMANCE	
----------------------------	--

Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control
Portata intensiva Booster airflow	580 m³/h
Livello sonoro min-max Noise level min-max	46-61 db(A)
Assorbimento totale Total absorption	207 W

ACCESSORI ACCESSORIES	
--------------------------	--

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0140426
--	------------

MODELLI MODELS	
-------------------	--

SWEET WHITE/A/85+CAM	PRF0167320
SWEET MOON BLACK/A/85 + CAM	PRF0201740
SWEET TAUPE/A/85 + CAM	PRF0201746
SWEET COPPER/A/85 + CAM	PRF0167324
SWEET PELTROX/A/85 + CAM	PRF0167323
SWEET SAGE/A/85 + CAM	PRF0201742
SWEET EMBRACE/A/85 + CAM	PRF0201744
SWEET BRONZE/A/85 + CAM	PRF0201748
SWEET PEACH FUZZ/A/85 + CAM	PRF0201750



Showcasing
Sweet



Element

Design Fabrizio Crisà



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	A+
-----------------------------------	----

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	
---	--

Gas	65 cm
-----	-------


Induzione/Radiante Induction/Radiant	50 cm
---	-------

MATERIALI & DIMENSIONI SIZE & MATERIALS	
--	--

90 - 120 cm

Aspirante Duct-out	
-----------------------	--

Acciaio inox + vetro nero,
Nero effetto soft touch + vetro nero
Stainless steel + black glass,
Black soft touch effect + black glass

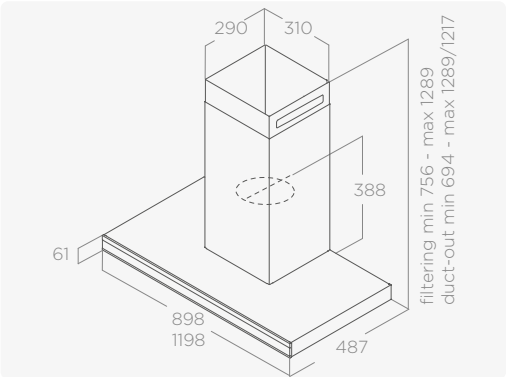

Innovare significa semplificare la vita. Cercate una cappa dal design tradizionale ed evoluto al tempo stesso? Desiderate cucinare senza suoni molesti e contenendo i consumi? Volete comandarla a distanza o lasciare che faccia da sé? Questo è l’elettrodomestico che fa per voi. La connessione Wi-Fi permette di attivarlo, regolarlo e spegnerlo tramite l’app Elica o l’assistente vocale. Inoltre la cappa può essere connessa anche al vostro piano a induzione Elica, con cui interagirà via bluetooth regolandosi in base alle potenze dei piano utilizzate. Il motore di ultima generazione assicura massima silenziosità e minimi consumi; i filtri possono durare fino a 3 anni (vs una media nel mercato di 3-6 mesi). Questa cappa vi consente anche di inserire delle mensole, per una modularità dall’effetto estetico wow. Ora non vi resta che mettervi a cucinare.

Innovation is about making life easier. Looking for a hood that combines classic and advanced design? Want to cook without undesired noise and efficiently? Want a hood with remote control and auto mode features? This is the appliance for you. Wi-Fi connectivity allows you to turn it on, adjust settings, and turn it off via the Elica app or voice assistant. Moreover, the hood can be connected with your Elica induction hob via Bluetooth, allowing it to automatically adjust its settings based on the hob's power levels. The latest generation motor delivers both whisper-quiet operation and unparalleled energy efficiency; the filters can last for up to 3 years (vs. standard filters that must be replaced every 3-6 months). This hood also allows you to incorporate shelves for a modular design that ups the wow factor. Now, all you need to do is get cooking.



ILLUMINAZIONE LIGHTING	
---------------------------	--

Tipo Type	Strip Led 1x7 W
--------------	-----------------

Intensità Intensity	365 (90cm) - 309 (120cm) LUX
------------------------	------------------------------

Temperatura Temperature	3500 K
----------------------------	--------

Filtro grassi alluminio incluso Aluminium grease filter included Camino incluso Chimney included	
---	--

ACCESSORI ACCESSORIES	
--------------------------	--

Filtro carbone Charcoal filter	CFC0140343
-----------------------------------	------------

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
--	------------

Kit mensola muro acciaio inox 60cm Stainless steel wall shelf kit 60cm	KIT0199584
---	------------

Kit mensola muro nero soft touch 60cm Black soft touch wall shelf kit 60cm	KIT0199583
---	------------

FUNZIONI FEATURES	
----------------------	--

- Long Life Filter
- Comfort Silence
- Dim Light
- Maintenance Alarm
- Connectivity
- Multi Connection
- Delay Switch Off
- Brushless
- Perimeter Aspiration

PERFORMANCE PERFORMANCE	
----------------------------	--

Comandi Controls	Touch Control Capacitivo 3V+I 3S+B Capacitive touch control
---------------------	--

Portata intensiva Booster airFlow	620 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	42-58 db(A)
---	-------------

Assorbimento totale Total absorption	177 W
---	-------

MODELLI MODELS	
-------------------	--

ELEMENT @ IXBL/A/90	PRF0194157
---------------------	------------

ELEMENT @ IXBL/A/120	PRF0196972
----------------------	------------

ELEMENT @ BLMAT/A/90	PRF0194415
----------------------	------------

ELEMENT @ BLMAT/A/120	PRF0196976
-----------------------	------------



Showcasing
Element

Adèle

Design Fabrizio Crisà




Contenuti aggiuntivi
More info

CLASSE ENERGETICA		A
ENERGY CLASS		
DISTANZA MIN DAL PIANO COTTURA	Gas	Induzione/Radiante
MIN DISTANCE FROM HOB	Gas	
	65 cm	50 cm
MATERIALI & DIMENSIONI		
SIZE & MATERIALS		
60 - 90 cm		
Aspirante		
Duct-out		
Acciaio inox + vetro nero, nero effetto soft touch + vetro nero		
Stainless steel + black glass, black soft touch effect + black glass		

ILLUMINAZIONE LIGHTING		
Tipo Type	Strip Led 1x7 W	
Intensità Intensity	421 LUX	
Temperatura Temperature	3000 K	

Filtro grassi alluminio incluso
Aluminium grease filter included
Camino incluso
Chimney included

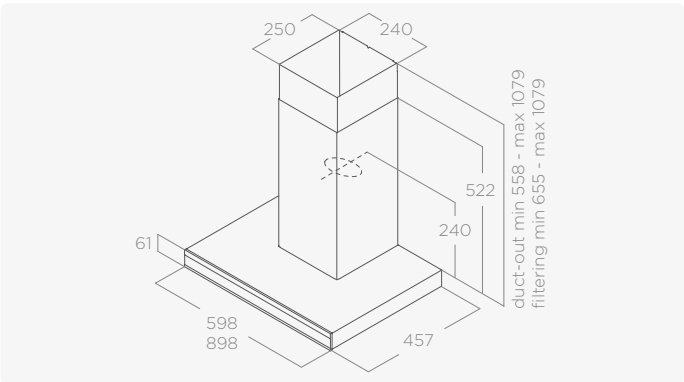

PERFORMANCE PERFORMANCE		
Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control	
Portata intensiva Booster airflow	770 m³/h	
Livello sonoro min-max Noise level min-max	55-69 db(A)	
Assorbimento totale Total absorption	277 W	

FUNZIONI

FEATURES

 Long Life Filter

 Easy to Maintain

 Maintenance Alarm

 Dim Light

 Multi Connection

 Delay Switch Off

 Connectivity

ACCESSORI ACCESSORIES		
Filtro carbone Charcoal filter	CFC0141529A	
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0141725A	
Kit prolunga camino acciaio inox H81 Stainless steel chimney extension kit H81	KIT00780	
Kit prolunga camino nero H81 Black chimney extension kit H81	KIT0181149	

MODELLI MODELS		
ADÈLE @ IXBL/A/60	PRF0199700	
ADÈLE @ IXBL/A/90	PRF0199701	
ADÈLE @ BLMAT/A/60	PRF0199698	
ADÈLE @ BLMAT/A/90	PRF0199699	

Elica Design Center

Joy

Elica Design Center




Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS		B
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS		
60 - 90 cm		
Aspirante Duct-out		
Acciaio inox + vetro bianco, acciaio inox + vetro nero Stainless steel + white glass, stainless steel + black glass		

ILLUMINAZIONE LIGHTING		
Tipo Type	Led 2x2,5 W	
Intensità Intensity	381 LUX	
Temperatura Temperature	3500 K	

Filtro grassi alluminio incluso
Aluminium grease filter included
Camino incluso
Chimney included

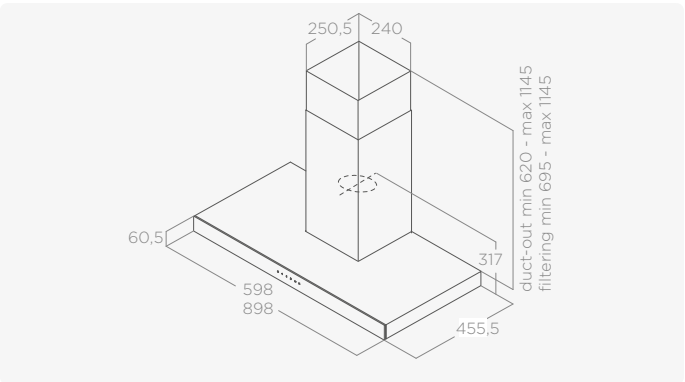

PERFORMANCE PERFORMANCE		
Comandi Controls	Touch control capacitivo 3V+I 3S+B Capacitive touch control	
Portata intensiva Booster airflow	713 m³/h	
Livello sonoro min-max Noise level min-max	51-69 db(A)	
Assorbimento totale Total absorption	265 W	

FUNZIONI FEATURES			
Long Life Filter	Easy to Maintain	Maintenance Alarm	

ACCESSORI ACCESSORIES		
Filtro carbone Charcoal filter	CFC0141529A	
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0141725A	
Kit prolunga camino acciaio inox H81 Stainless steel chimney extension kit H81	KIT00780	


MODELLI MODELS		
JOY BLIX/A/60	PRF0104625A	
JOY BLIX/A/90	PRF0104626A	
JOY WHIX/A/60	PRF0104630A	
JOY WHIX/A/90	PRF0104631A	

Lol

Design Fabrizio Crisà



CLASSE ENERGETICA ENERGY CLASS		A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas	Induzione/Radiante	
	Gas	Induction/Radiant	
	65 cm	50 cm	
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 -90 cm			
Aspirante Duct-out			
Nero effetto soft touch, bianco effetto soft touch Black soft touch effect, white soft touch effect			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,5 W		
Intensità Intensity	381 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included Camino incluso Chimney included			

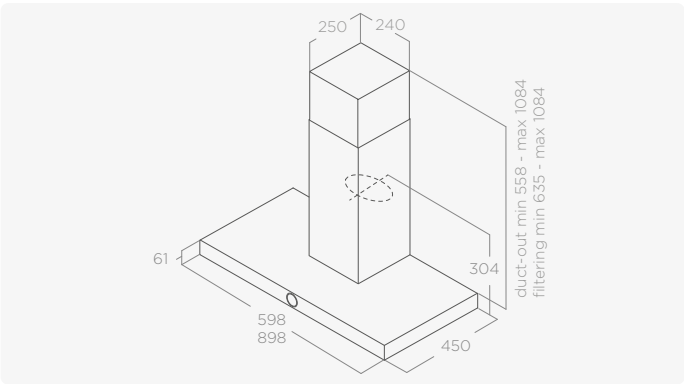

PERFORMANCE PERFORMANCE	
Comandi Controls	Rotativo elettronico 3V+I 3S+B Electronic rotative
Portata intensiva Booster airflow	620 m³/h
Livello sonoro min-max Noise level min-max	52-67 db(A)
Assorbimento totale Total absorption	205 W
FUNZIONI FEATURES	
Long Life Filter Easy to Maintain Maintenance Alarm	
ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0141529A
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0141725A
Kit prolunga camino acciaio inox H81 Stainless steel chimney extension kit H81	KIT00780


MODELLI MODELS	
LOL WH/A/60 MOON EDITION	PRF0186281
LOL WH/A/90 MOON EDITION	PRF0186282
LOL BL/A/60 MOON EDITION	PRF0159784A
LOL BL/A/90 MOON EDITION	PRF0159785A

Spot Urban

Elica Design Center



CLASSE ENERGETICA ENERGY CLASS		B	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas	Induzione/Radiante	
	Gas	Induction/Radiant	
	65 cm	50 cm	
MATERIALI & DIMENSIONI SIZE & MATERIALS			
90 cm			
Aspirante Duct-out			
Metallo effetto ghisa Cast iron effect metal			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,5 W		
Intensità Intensity	381 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included Camino incluso Chimney included			

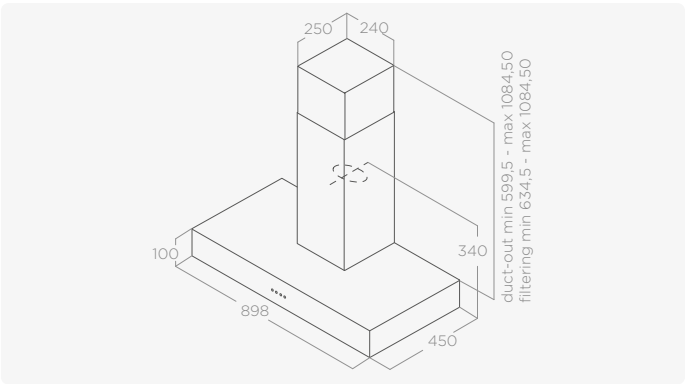

PERFORMANCE PERFORMANCE	
Comandi Controls	Pulsantiera meccanica 3V 3S Mechanical push button
Portata intensiva Booster airflow	630 m³/h
Livello sonoro min-max Noise level min-max	52-71 db(A)
Assorbimento totale Total absorption	255 W
FUNZIONI FEATURES	
Long Life Filter	
ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0141529A
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0141725A


MODELLI MODELS	
SPOT URBAN CAST IRON/A/90	PRF0147736

Spot NG

Elica Design Center



CLASSE ENERGETICA ENERGY CLASS		D	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 cm			
Aspirante Duct-out			
Acciaio inox Stainless steel			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,5 W		
Intensità Intensity	381 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included			
Camino incluso Chimney included			

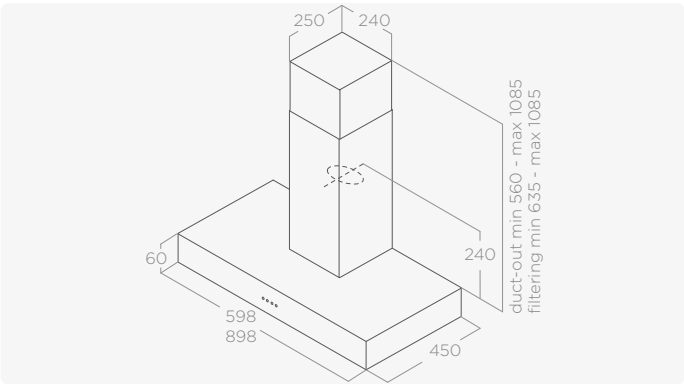


Flat Glass

Elica Design Center



CLASSE ENERGETICA ENERGY CLASS		D	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 cm			
Aspirante Duct-out			
Acciaio inox + vetro Stainless steel + glass			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2x2,5 W		
Intensità Intensity	381 LUX		
Temperatura Temperature	3500 K		
Filtro grassi alluminio incluso Aluminium grease filter included Camino incluso Chimney included			

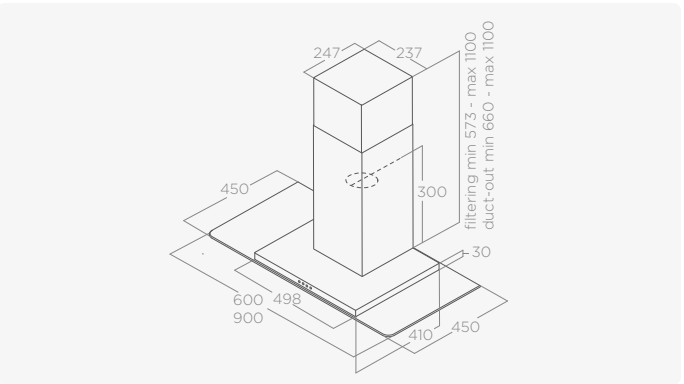

PERFORMANCE	
PERFORMANCE	
Comandi Controls	Pulsantiera meccanica 3V 3S Mechanical push button
Portata intensiva Booster airflow	384 m³/h
Livello sonoro min-max Noise level min-max	55-62 db(A)
Assorbimento totale Total absorption	140 W
FUNZIONI	
FEATURES	
 Long Life Filter	
ACCESSORI	
ACCESSORIES	
Filtro carbone Charcoal filter	CFC0141529A
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0141725A
Kit prolunga camino acciaio inox H81 Stainless steel chimney extension kit H81	KIT00780

MODELLI MODELS	
FLAT GLASS IX/A/60	68516391A
FLAT GLASS IX/A/90	68516390A

Circus


Elica Design Center



CLASSE ENERGETICA ENERGY CLASS	D	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS		
60 - 90 cm		
Aspirante Duct-out		
Acciaio inox + vetro Stainless steel + glass		

ILLUMINAZIONE LIGHTING		
Tipo Type	Led 2×2,5 W	
Intensità Intensity	381 LUX	
Temperatura Temperature	3500 K	

Filtro grassi alluminio incluso
Aluminium grease filter included
Camino incluso
Chimney included

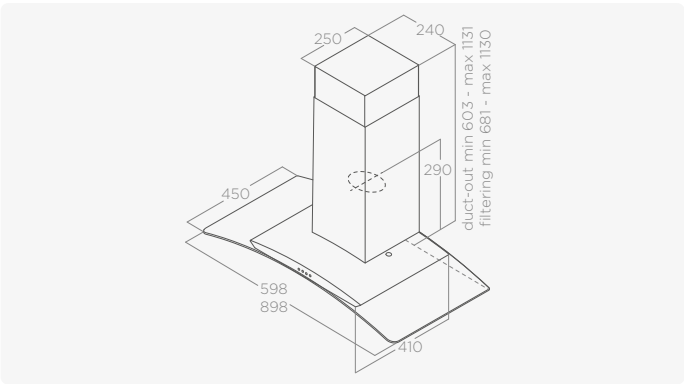

Elica Design Center


Tube Pro



CLASSE ENERGETICA ENERGY CLASS	C	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS		
Ø 43 cm		
Aspirante Duct-out		
Acciaio inox, nero effetto soft touch, bianco effetto soft touch Stainless steel, black soft touch effect, white soft touch effect		

ILLUMINAZIONE LIGHTING		
Tipo Type	Led 2×2,5 W	
Intensità Intensity	457 LUX	
Temperatura Temperature	2700 K	

Filtro grassi alluminio incluso
Aluminium grease filter included

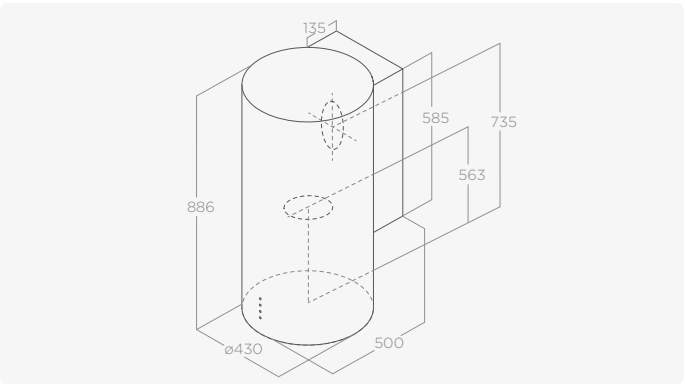

PERFORMANCE PERFORMANCE		
Comandi Controls	Pulsantiera meccanica 3V 3S Mechanical push button	
Portata intensiva Booster airflow	603 m³/h	
Livello sonoro min-max Noise level min-max	47-68 db(A)	
Assorbimento totale Total absorption	256 W	

FUNZIONI FEATURES	Long Life Filter Back Aspiration	
----------------------	----------------------------------	--

ACCESSORI ACCESSORIES		
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0140423	

MODELLI MODELS		
TUBE PRO IX/A/43	PRF0080075B	
TUBE PRO BL MAT/A/43	PRF0090719B	
TUBE PRO WH MAT/A/43	PRF0090720B	

Stone

Elica Design Center




CLASSE ENERGETICA ENERGY CLASS	C	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS		
ø33 cm		
Filtrante Filtering		

Acciaio inox, bianco Stainless steel, white

ILLUMINAZIONE LIGHTING		
Tipo Type	Led 2×2,5 W	
Intensità Intensity	457 LUX	
Temperatura Temperature	2700 K	

Filtro grassi alluminio incluso
Aluminium grease filter included
Camino incluso
Chimney included

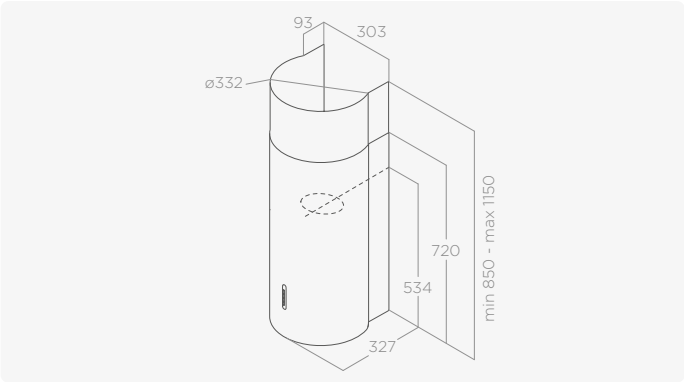

PERFORMANCE PERFORMANCE		
Comandi Controls	Pulsantiera soft light 3V 3S Soft light push button	
Portata intensiva Booster airflow	559 m³/h	
Livello sonoro min-max Noise level min-max	44 - 67 db(A)	
Assorbimento totale Total absorption	180 W	

FUNZIONI FEATURES	Long Life Filter	
----------------------	------------------	--

ACCESSORI ACCESSORIES		
Filtro carbone Charcoal filter	CFC0141529A	
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0141725A	

MODELLI MODELS		
STONE IX/A/33	61412862B	
STONE WH/A/33	PRF0007123A	

Elica Design Center

Tonda




CLASSE ENERGETICA ENERGY CLASS	D	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS		
60 - 90 cm		
Filtrante Filtering		

Acciaio inox, bianco
Stainless steel, white

ILLUMINAZIONE LIGHTING		
Tipo Type	Led 2×3 W	
Intensità Intensity	97 LUX	
Temperatura Temperature	2700 K	

Filtro grassi alluminio incluso
Aluminium grease filter included
Filtro carbone incluso
Charcoal filter included
Camino incluso
Chimney included

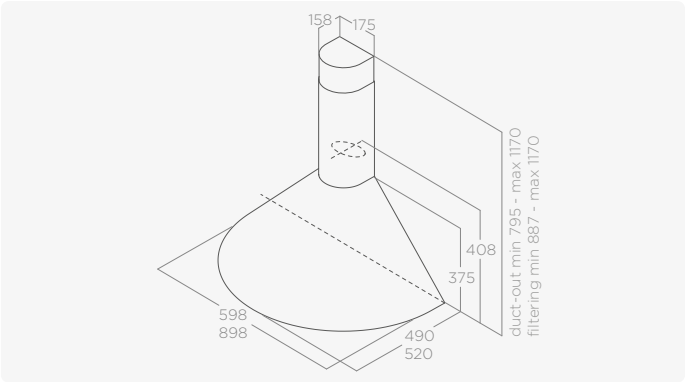

PERFORMANCE PERFORMANCE		
Comandi Controls	Slider meccanico 3V 3S Mechanical slider	
Portata intensiva Booster airflow	355 m³/h	
Livello sonoro min-max Noise level min-max	60-67 db(A)	
Assorbimento totale Total absorption	146 W	

ACCESSORI ACCESSORIES		
Filtro carbone Charcoal filter	CFC0140124	

MODELLI MODELS		
TONDA IX F/60	2938000C	
TONDA IX F/90	2937999C	
TONDA WH F/60	2939587C	

Missy

Elica Design Center



Contenuti aggiuntivi
More info

CLASSE ENERGETICA ENERGY CLASS	D	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm

MATERIALI & DIMENSIONI SIZE & MATERIALS
--

60 - 90 cm

Aspirante Duct-out

Acciaio inox, nero, bianco Stainless steel, black, white


ILLUMINAZIONE LIGHTING

Tipo Type	Led 2×3 W
--------------	-----------

Intensità Intensity	97 LUX
------------------------	--------

Temperatura Temperature	2700 K
----------------------------	--------

Filtro grassi alluminio incluso Aluminium grease filter included	
Camino incluso Chimney included	

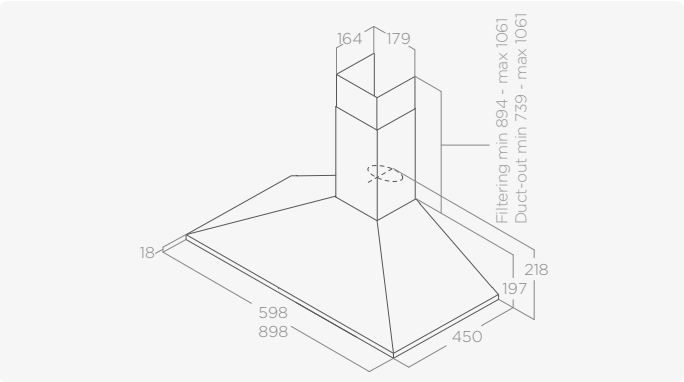

PERFORMANCE PERFORMANCE

Comandi Controls	Pulsantiera meccanica 3V 3S Mechanical push button
---------------------	---

Portata intensiva Booster airflow	395 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	49-68 db(A)
---	-------------

Assorbimento totale Total absorption	96 W
---	------

ACCESSORI ACCESSORIES

Filtro carbone Charcoal filter	CFC0141497
-----------------------------------	------------

MODELLI MODELS

MISSY PB IX/A/60	PRF0091761B
------------------	-------------

MISSY PB IX/A/90	PRF0091763B
------------------	-------------

MISSY BL/A/60	PRF0151543
---------------	------------

MISSY BL/A/90	PRF0151544
---------------	------------

MISSY LX WH/A/60	PRF0057574B
------------------	-------------

Elica Design Center

Tamaya 2.0 Rail



CLASSE ENERGETICA ENERGY CLASS	D	
-----------------------------------	---	--

DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB	Gas	Induzione/Radiante Induction/Radiant
	65 cm	50 cm

MATERIALI & DIMENSIONI SIZE & MATERIALS
--

60 - 90 cm

Aspirante Duct-out

Antracite + reggimestolo bronzato, avorio + reggimestolo bronzato Anthracite + bronze ladle holder, ivory + bronze ladle holder
--


ILLUMINAZIONE LIGHTING

Tipo Type	Led 2×2,5 W
--------------	-------------

Intensità Intensity	381 LUX
------------------------	---------

Temperatura Temperature	3500 K
----------------------------	--------

Filtro grassi alluminio incluso Aluminium grease filter included	
Camino incluso Chimney included	

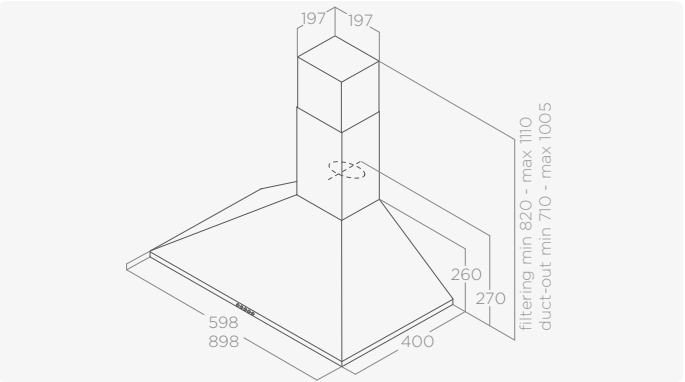

PERFORMANCE PERFORMANCE


Comandi Controls	Pulsantiera meccanica 3V 3S Mechanical push button
---------------------	---

Portata intensiva Booster airflow	435 m³/h
--------------------------------------	----------

Livello sonoro min-max Noise level min-max	56 - 65 db(A)
---	---------------

Assorbimento totale Total absorption	145 W
---	-------

FUNZIONI FEATURES



ACCESSORI ACCESSORIES

Filtro carbone Charcoal filter	CFC0140343
-----------------------------------	------------

Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221
--	------------

MODELLI MODELS

TAMAYA RAIL ANBR/A/60	PRF0172861
-----------------------	------------

TAMAYA RAIL ANBR/A/90	PRF0177406
-----------------------	------------

TAMAYA RAIL CRBR/A/60	PRF0177408
-----------------------	------------

TAMAYA RAIL CRBR/A/90	PRF0177418
-----------------------	------------


Berlin

Elica Design Center



CLASSE ENERGETICA ENERGY CLASS		D	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 cm			
Aspirante Duct-out			
Antracite, avorio Anthracite, ivory			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2 × 3 W		
Intensità Intensity	97 LUX		
Temperatura Temperature	2700 K		

Filtro grassi alluminio incluso
Aluminium grease filter included
Camino incluso
Chimney included

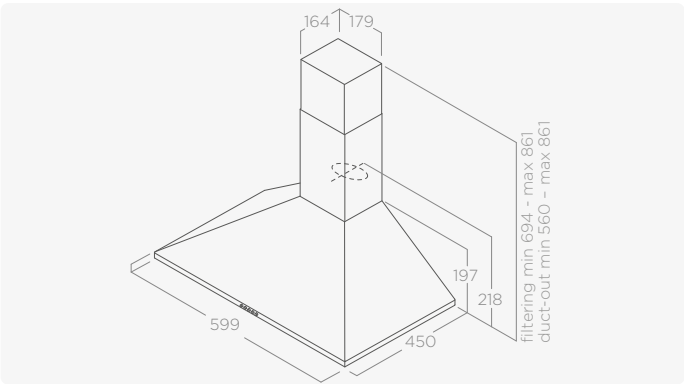

PERFORMANCE	
PERFORMANCE	
Comandi Controls	Pulsantiera Meccanica 3V 3S Mechanical Push Button
Portata intensiva Booster airFlow	395 m³/h
Livello sonoro min-max Noise level min-max	49 - 68 db(A)
Assorbimento totale Total absorption	96 W
ACCESSORI	
ACCESSORIES	
Filtro carbone Charcoal filter	CFC0141497

MODELLI MODELS		
BERLIN AN/A/60	PRF0123178B	
BERLIN CR/A/60	PRF0123188B	


Elica Design Center

Emerald



CLASSE ENERGETICA ENERGY CLASS		D	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 cm			
Aspirante Duct-out			
Bianco + cornice tuliper grezzo White + frame unfinished tulipwood			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2 × 3 W		
Intensità Intensity	73 LUX		
Temperatura Temperature	2700 K		

Filtro grassi alluminio incluso
Aluminium grease filter included
Camino incluso
Chimney included

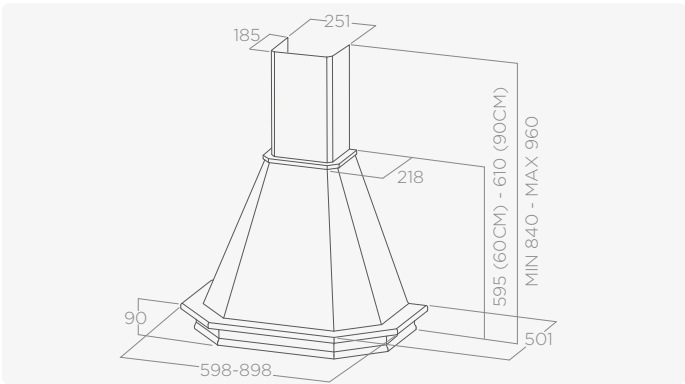

PERFORMANCE		
PERFORMANCE		
Comandi Controls	Slider 3V 3S Slider	
Portata intensiva Booster airFlow	435 m³/h	
Livello sonoro min-max Noise level min-max	56 - 65 db(A)	
Assorbimento totale Total absorption	146 W	
ACCESSORI		
ACCESSORIES		
Filtro carbone Charcoal filter	CFC0140343	

MODELLI MODELS		
EMERALD WH/A/60 T.GREZZO	PRF0041870B	
EMERALD WH/A/90 T.GREZZO	PRF0041890B	


Coraline

Elica Design Center



CLASSE ENERGETICA ENERGY CLASS		D	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
60 - 90 cm			
Aspirante Duct-out			
Bianco + cornice tuliper grezzo White + frame unfinished tulipwood			
ILLUMINAZIONE LIGHTING			
Tipo Type	Led 2 × 3 W		
Intensità Intensity	73 LUX		
Temperatura Temperature	2700 K		

Filtro grassi alluminio incluso
Aluminium grease filter included
Camino incluso
Chimney included

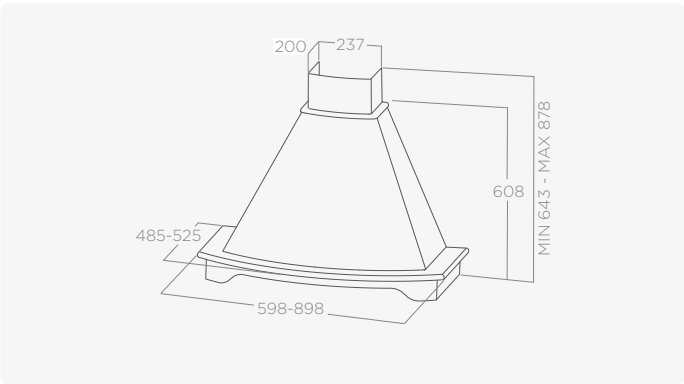

PERFORMANCE	
PERFORMANCE	
Comandi Controls	Slider 3V 3S Slider
Portata intensiva Booster airFlow	435 m³/h
Livello sonoro min-max Noise level min-max	56 - 65 db(A)
Assorbimento totale Total absorption	146 W
ACCESSORI	
ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343

MODELLI MODELS		
CORALINE WH/A/60 T.GREZZO	PRF0041810B	
CORALINE WH/A/90 T.GREZZO	PRF0041832B	

Elica Design Center


Acuta



CLASSE ENERGETICA ENERGY CLASS		A	
DISTANZA MIN DAL PIANO COTTURA MIN DISTANCE FROM HOB		Gas Gas	Induzione/Radiante Induction/Radiant
		65 cm	50 cm
MATERIALI & DIMENSIONI SIZE & MATERIALS			
100 cm			
Filtrante Filtering			
Acciaio inox, nero Stainless steel, black			

ILLUMINAZIONE LIGHTING	
Tipo Type	Led 4×2,5 W
Intensità Intensity	441 LUX
Temperatura Temperature	3500 K

Filtro grassi alluminio incluso
Aluminium grease filter included
Filtro carbone incluso
Charcoal filter included
Camino incluso
Chimney included

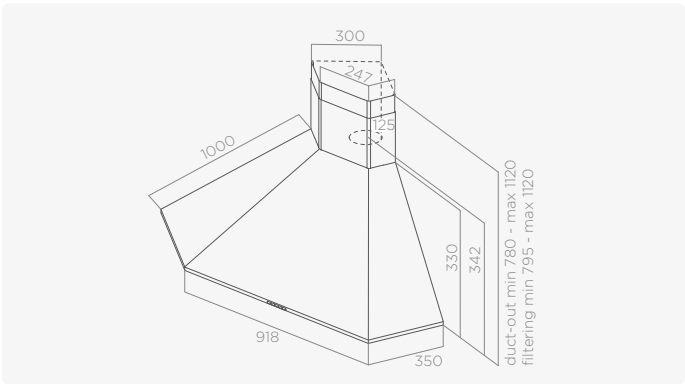

PERFORMANCE PERFORMANCE	
Comandi Controls	Pulsantiera elettronica 3V+I 3S+B Electronic push button
Portata intensiva Booster airflow	625 m³/h
Livello sonoro min-max Noise level min-max	46-60 db(A)
Assorbimento totale Total absorption	210 W

FUNZIONI FEATURES	
Long Life Filter	Easy to Maintain
Maintenance Alarm	
Delay Switch Off	


ACCESSORI ACCESSORIES	
Filtro carbone Charcoal filter	CFC0140343
Filtro carbone rigenerabile Regenerable charcoal filter	CFC0162221

MODELLI MODELS	
ACUTA IX/F/100	PRF0121267A
ACUTA BL/F/100	PRF0127462A

4.1


Open Suite - Modulo aspirante Open Suite - Extraction unit

KIT0167073A
Kit modulo aspirante
Extraction module kit

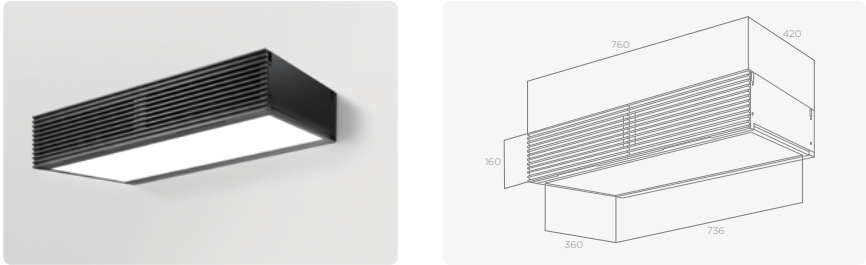


Open Suite - Modulo luce Open Suite - Lighting unit

KIT0166964A
Kit modulo full Led
Full LED module kit

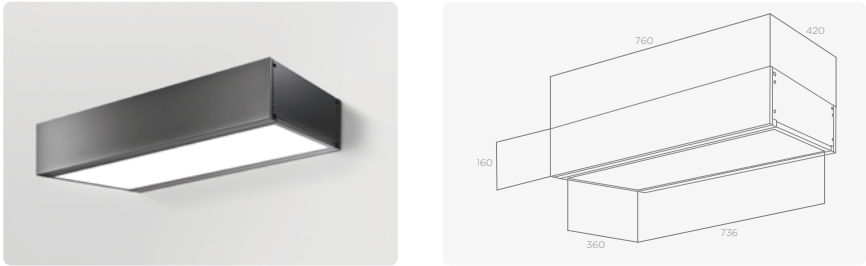


Open Suite - Accessori strutturali Open Suite - Structural accessories

KIT0166963
Kit traliccio
Trellis expansion kit

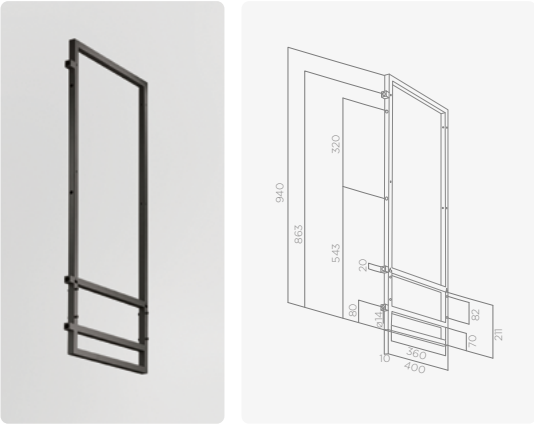


KIT0166768
Kit cornice mensola
Shelf frame kit

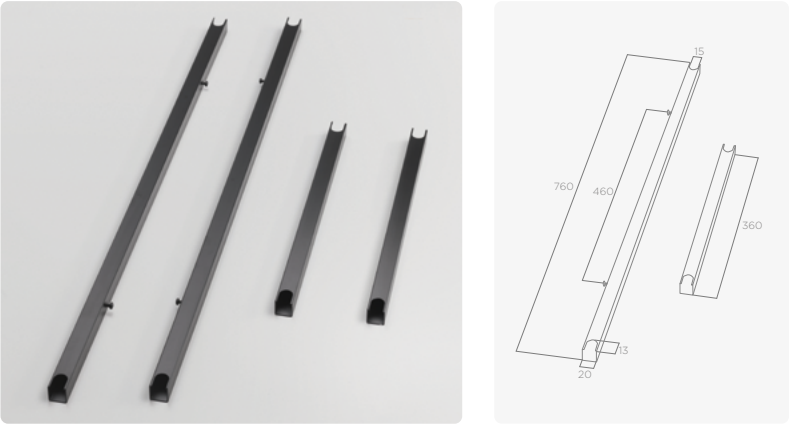


Open Suite - Mensole Arredo Open Suite - Decorative Shelves


KIT0166455
Kit mensola vetro extra-chiaro
Extra-clear glass shelf kit

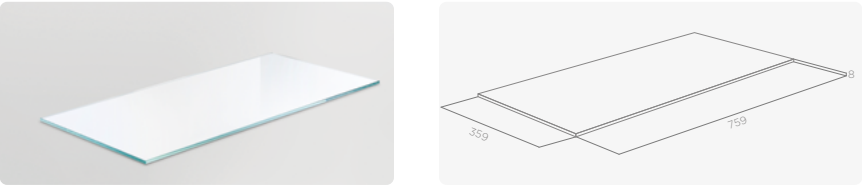


KIT0166463
Kit mensola vetro fumé
Smoked glass shelf kit

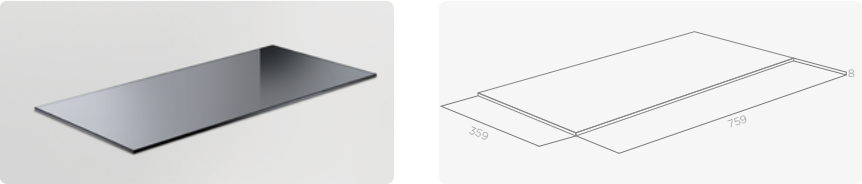


KIT0166470
Kit mensola metallo nero
Black metal shelf kit

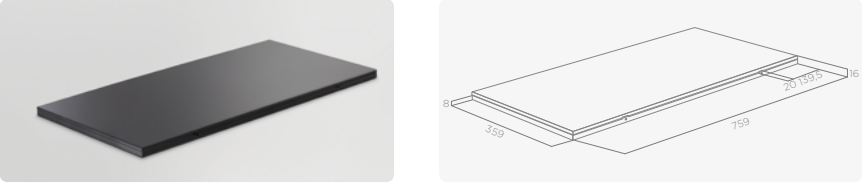

KIT0166472
Kit mensola rete metallica
Wire mesh shelf kit

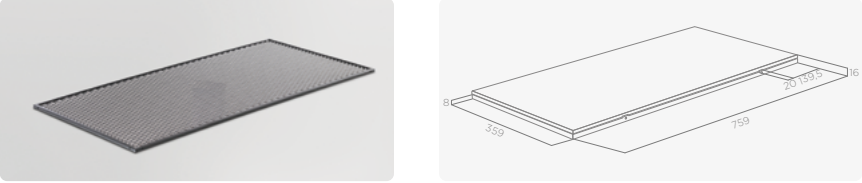


KIT0166475
Kit mensola legno
Wooden shelf kit

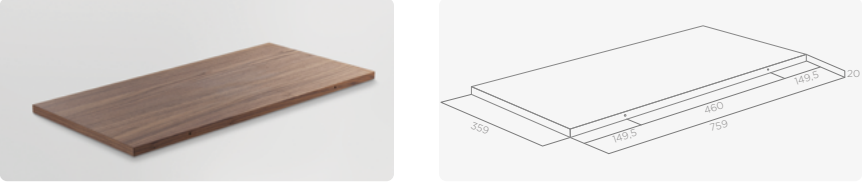


Bio - Mensole Arredo Bio - Decorative Shelves

















KIT0120946
Kit mensola BIO 60CM
Shelf Kit BIO 60CM

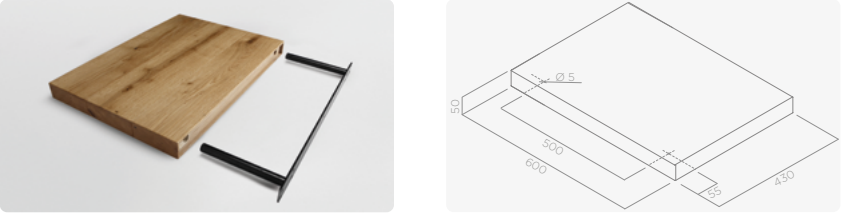









Element - Mensole Arredo Element - Decorative Shelves

KIT0199583
Kit mensola ELEMENT nero opaco 60CM
Shelf Kit ELEMENT black matt 60CM

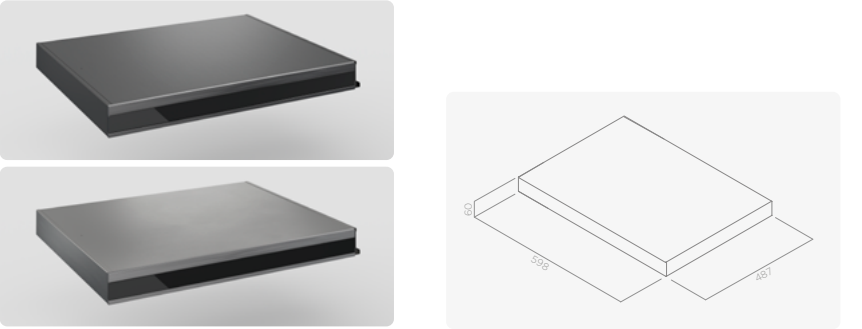

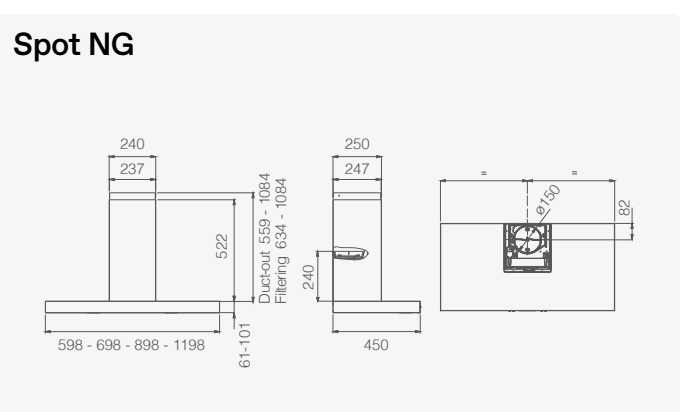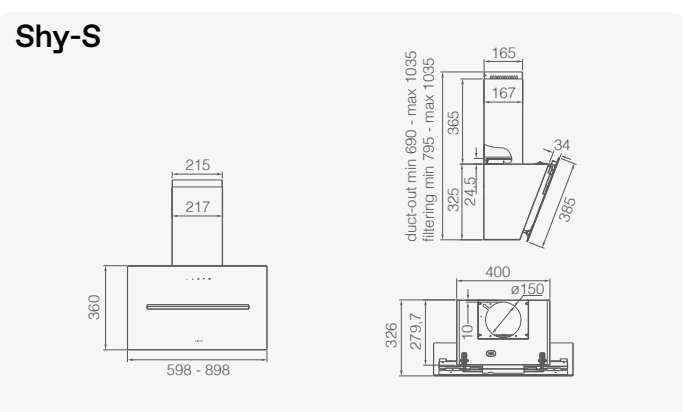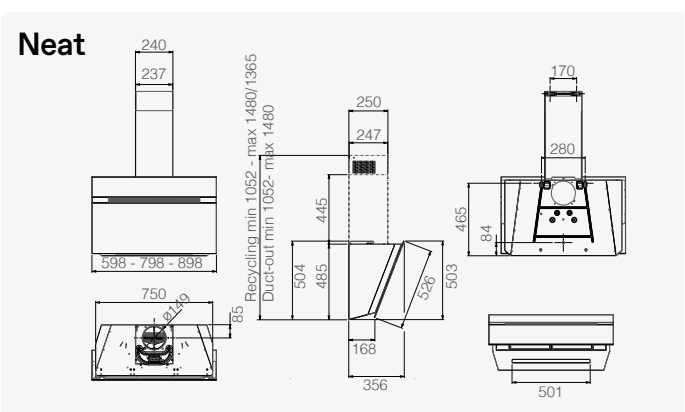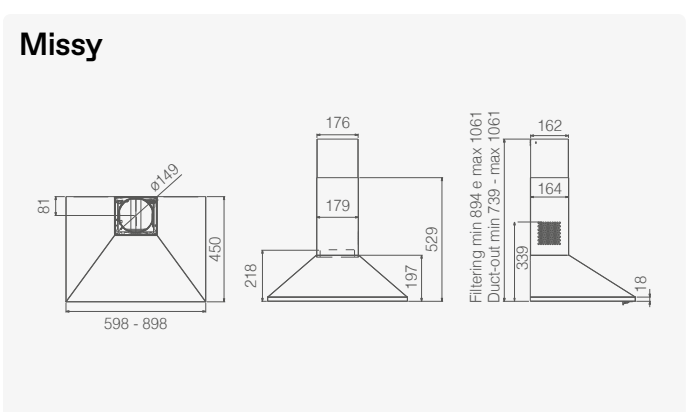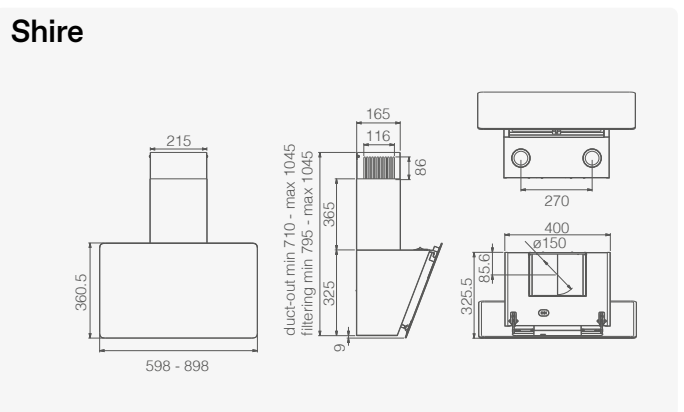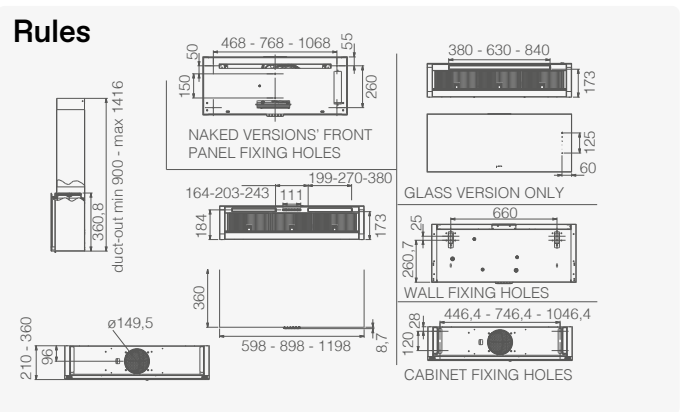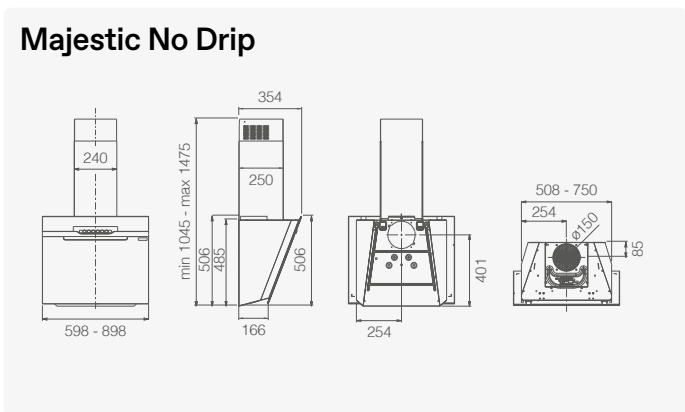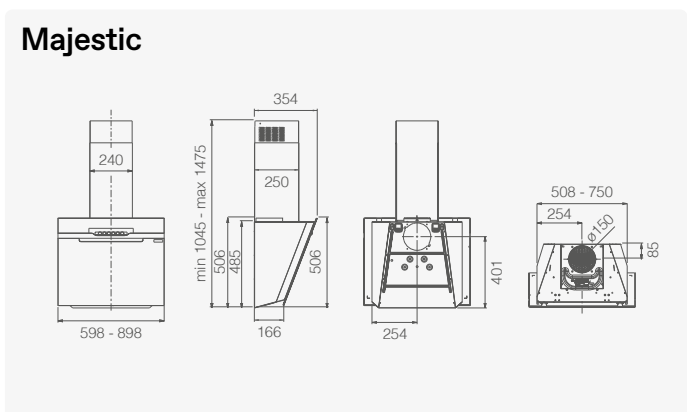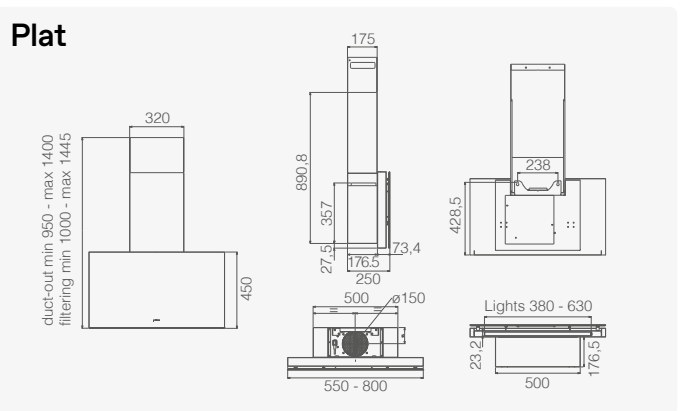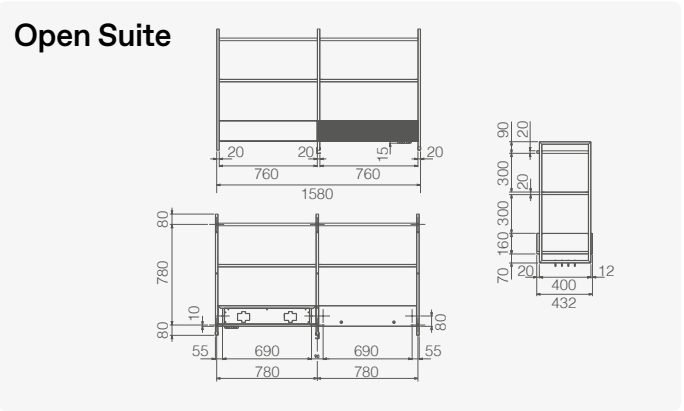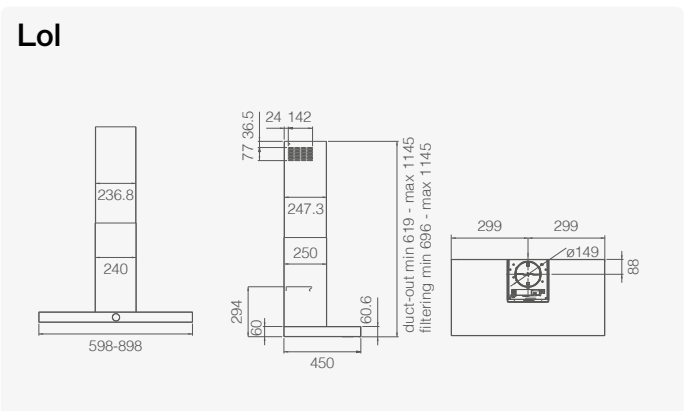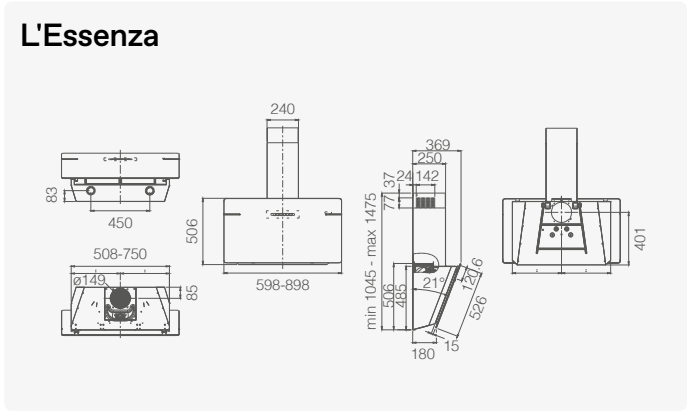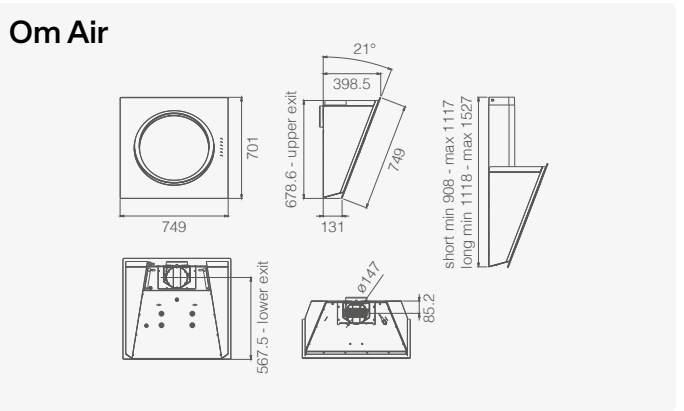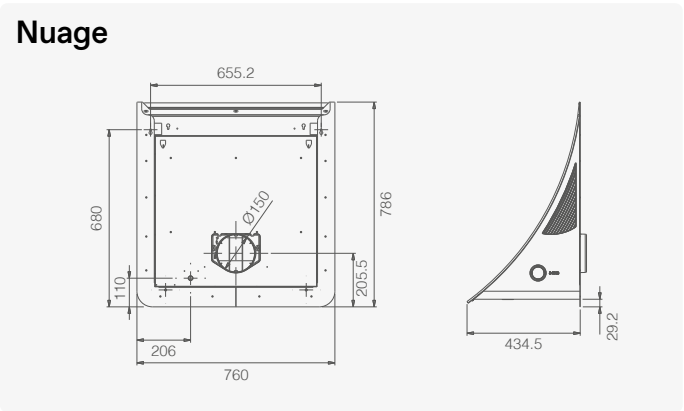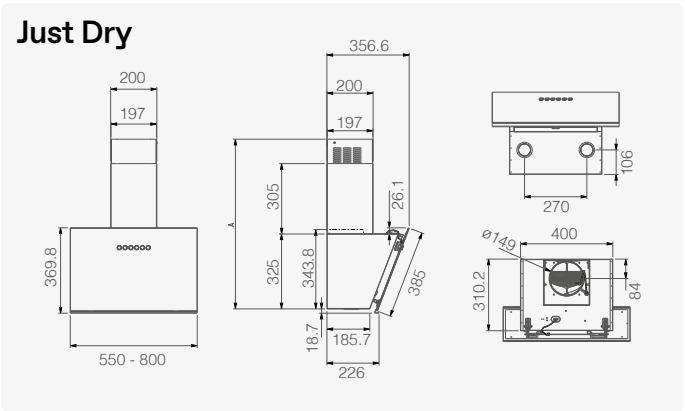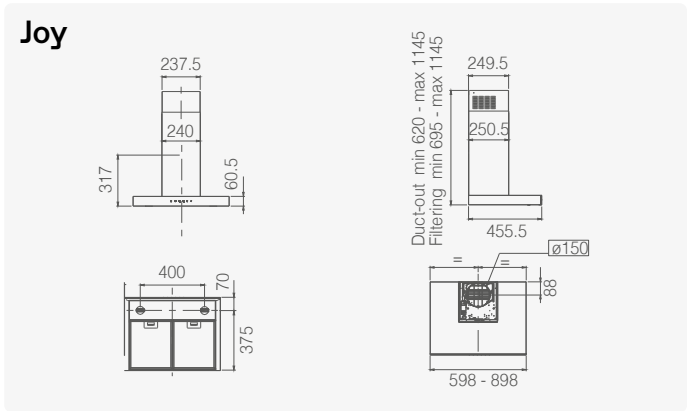

4.1

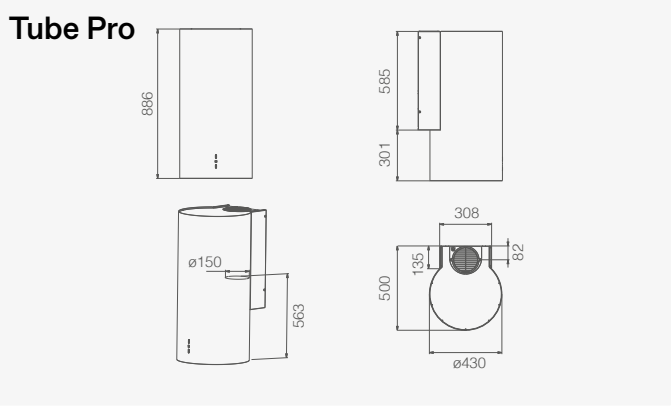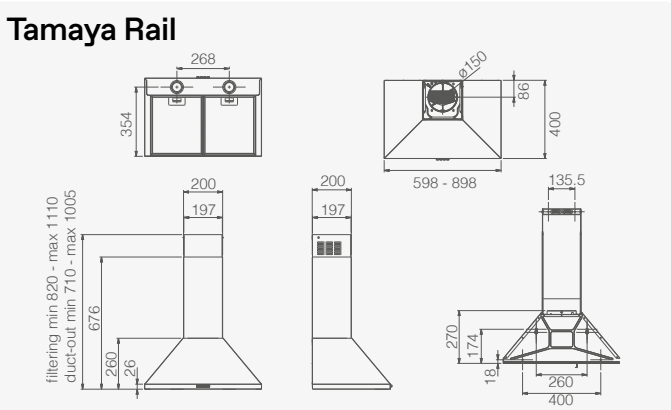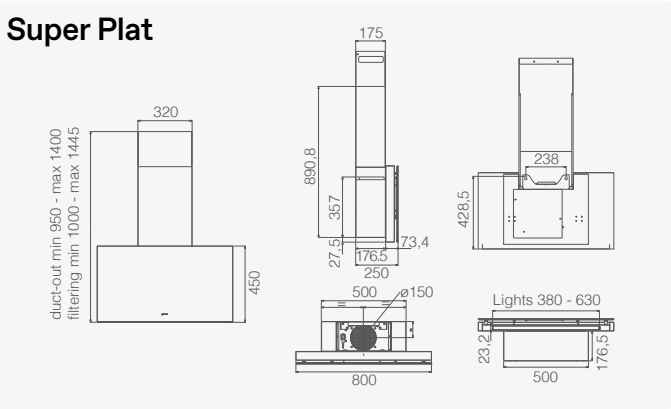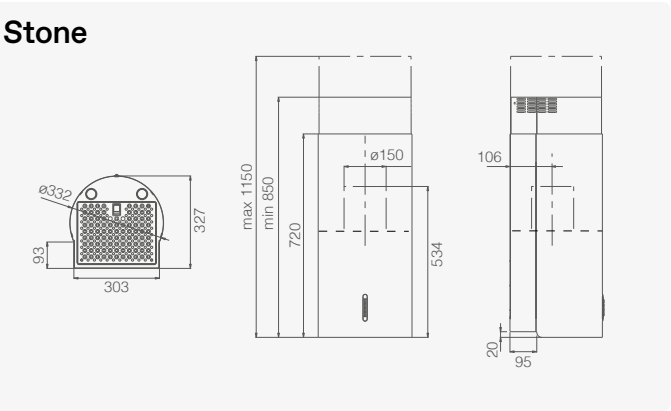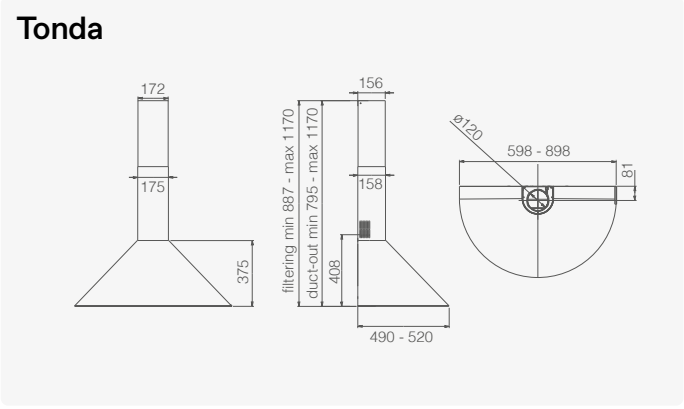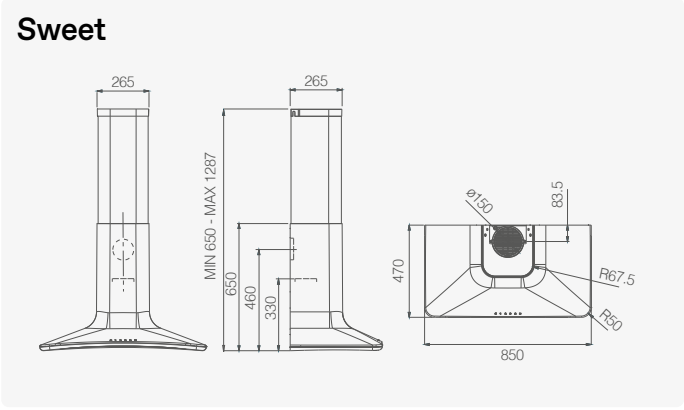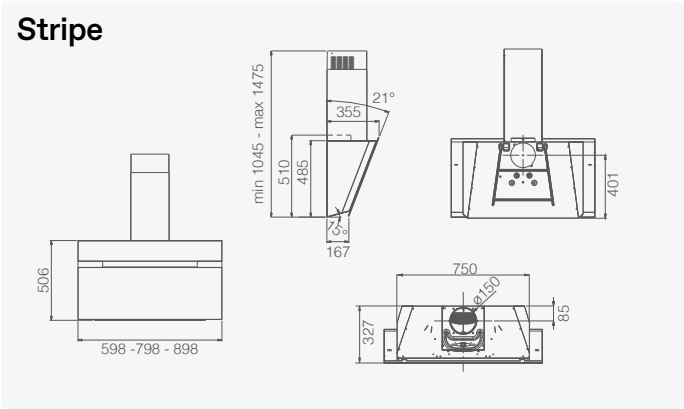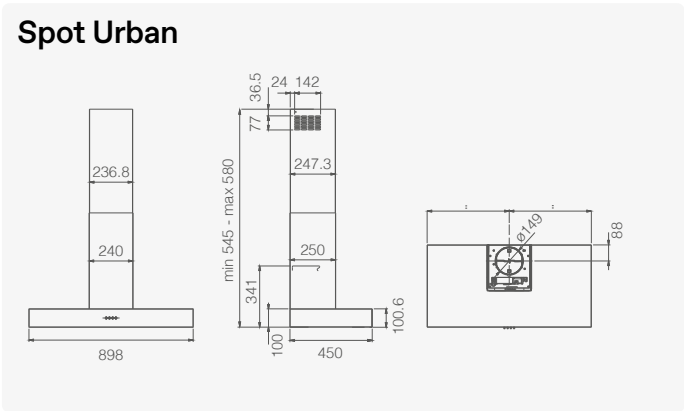

Filtri odori. Odour filters.

	CODICE FILTRO FILTER CODE	TIPO FILTRO FILTER TYPE
Acuta	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Adèle	CFC0141529A	Carbone / Charcoal
	CFC0141725A	Carbone rigenerabile Regenerable charcoal
Aplomb	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Bio	CFC0140091	Carbone rigenerabile HP Regenerable charcoal HP
	CFC0141725A	Carbone rigenerabile Regenerable charcoal
Berlin	CFC0141497	Carbone / Charcoal
Bloom	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Bloom-S	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Circus	CFC0141529A	Carbone / Charcoal
	CFC0141725A	Carbone rigenerabile Regenerable charcoal
Coraline	CFC0140343	Carbone / Charcoal
Element	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Emerald	CFC0140343	Carbone / Charcoal
Flat Glass	CFC0141529A	Carbone / Charcoal
	CFC0141725A	Carbone rigenerabile Regenerable charcoal
Haiku	CFC0141529A	Carbone / Charcoal
	CFC0141725A	Carbone rigenerabile Regenerable charcoal
Haiku Dry	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Joy	CFC0141529A	Carbone / Charcoal
	CFC0141725A	Carbone rigenerabile Regenerable charcoal
Just Dry	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
L'Essenza	CFC0140343	Carbone / Charcoal
Lo1	CFC0141529A	Carbone / Charcoal
	CFC0141725A	Carbone rigenerabile Regenerable charcoal

	CODICE FILTRO FILTER CODE	TIPO FILTRO FILTER TYPE
Majestic	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Majestic No Drip	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Missy	CFC0141497	Carbone / Charcoal
Neat	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Nuage	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Open Suite	KIT0166765	Carbone rigenerabile Regenerable charcoal
Om Air	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Plat	CFC0140423	Carbone rigenerabile Regenerable charcoal
Rules	CFC0166361	Carbone rigenerabile Regenerable charcoal
Shire	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Spot Urban	CFC0141529A	Carbone / Charcoal
	CFC0141725A	Carbone rigenerabile Regenerable charcoal
Spot NG	CFC0141529A	Carbone / Charcoal
	CFC0141725A	Carbone rigenerabile Regenerable charcoal
Stone	CFC0141529A	Carbone / Charcoal
	CFC0141725A	Carbone rigenerabile Regenerable charcoal
Super Plat	CFC0140423	Carbone / Charcoal
Stripe	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Shy-S	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal
Sweet	CFC0140426	Carbone rigenerabile Regenerable charcoal
Tube Pro	CFC0140423	Carbone rigenerabile Regenerable charcoal
Tonda	CFC0140124	Carbone / Charcoal
Tamaya 2.0 Rail	CFC0140343	Carbone / Charcoal
	CFC0162221	Carbone rigenerabile Regenerable charcoal

4.1

Tutto sulle performance.
Performance details.

	ENERGY CLASS	1 SPEED (AIRFLOW/NOISE)	2 SPEED (AIRFLOW/NOISE)	3 SPEED (AIRFLOW/NOISE)	4 SPEED * (AIRFLOW/NOISE)	5 SPEED * (AIRFLOW/NOISE)
Acuta	A	272 m³/h - 46 db(A)	368 m³/h - 53 db(A)	515 m³/h - 60 db(A)	---	625 m³/h - 65 db(A)
Adèle	A	325 m³/h - 55 db(A)	435 m³/h - 61 db(A)	630 m³/h - 69 db(A)	---	770 m³/h - 74 db(A)
Aplomb	A	275 m³/h - 51 db(A)	385 m³/h - 59 db(A)	495 m³/h - 64 db(A)	---	680 m³/h - 71 db(A)
Berlin	D	165 m³/h - 49 db(A)	224 m³/h - 55 db(A)	395 m³/h - 68 db(A)	---	---
Bio	A++	205 m³/h - 44 db(A)	320 m³/h - 50 db(A)	470 m³/h - 58 db(A)	620 m³/h - 64 db(A)	680 m³/h - 66 db(A)
Bloom	A	185 m³/h - 37 db(A)	310 m³/h - 52 db(A)	400 m³/h - 57 db(A)	---	770 m³/h - 70 db(A)
Bloom-S	A++	210 m³/h - 45 db(A)	330 m³/h - 52 db(A)	485 m³/h - 58 db(A)	700 m³/h - 67 db(A)	---
Circus	D	195 m³/h - 55 db(A)	368 m³/h - 56 db(A)	384 m³/h - 62 db(A)	---	---
Coraline	D	290 m³/h - 56 db(A)	370 m³/h - 61 db(A)	435 m³/h - 65 db(A)	---	---
Element	A+	185 m³/h - 42 db(A)	295 m³/h - 50 db(A)	430 m³/h - 58 db(A)	620 m³/h - 66 db(A)	---
Emerald	D	290 m³/h - 56 db(A)	370 m³/h - 61 db(A)	435 m³/h - 65 db(A)	---	---
Flat Glass	D	195 m³/h - 55 db(A)	368 m³/h - 56 db(A)	384 m³/h - 62 db(A)	---	---
Haiku	A	155 m³/h - 34 db(A)	295 m³/h - 47 db(A)	375 m³/h - 51 db(A)	560 m³/h - 58 db(A)	690 m³/h - 63 db(A)
Haiku Dry	A+	200 m³/h - 41 db(A)	320 m³/h - 49 db(A)	480 m³/h - 57 db(A)	680 m³/h - 66 db(A)	---
Joy	B	288 m³/h - 51 db(A)	432 m³/h - 61 db(A)	581 m³/h - 69 db(A)	---	713 m³/h - 73 db(A)
Just Dry	A	300 m³/h - 51 db(A)	357 m³/h - 56 db(A)	530 m³/h - 63 db(A)	670 m³/h - 67 db(A)	
L'Essenza	B	288 m³/h - 49 db(A)	432 m³/h - 57 db(A)	603 m³/h - 65 db(A)	---	691 m³/h - 68 db(A)
Lo1	A	280 m³/h - 52 db(A)	405 m³/h - 60 db(A)	540 m³/h - 67 db(A)	---	620 m³/h - 70 db(A)
Majestic	B	288 m³/h - 49 db(A)	432 m³/h - 57 db(A)	603 m³/h - 65 db(A)	---	691 m³/h - 68 db(A)
Majestic No Drip	A	245 m³/h - 46 db(A)	345 m³/h - 53 db(A)	485 m³/h - 60 db(A)	---	600 m³/h - 66 db(A)
Missy	D	165 m³/h - 49 db(A)	225 m³/h - 55 db(A)	395 m³/h - 68 db(A)	---	---
Neat	A+/A++	210 m³/h - 46 db(A)	325 m³/h - 52 db(A)	475 m³/h - 59 db(A)	690 m³/h - 67 db(A)	---
Nuage	A	230 m³/h - 49 db(A)	330 m³/h - 53 db(A)	440 m³/h - 62 db(A)	---	580 m³/h - 65 db(A)

	ENERGY CLASS	1 SPEED (AIRFLOW/NOISE)	2 SPEED (AIRFLOW/NOISE)	3 SPEED (AIRFLOW/NOISE)	4 SPEED * (AIRFLOW/NOISE)	5 SPEED * (AIRFLOW/NOISE)
Om Air	A++	210 m³/h - 48 db(A)	320 m³/h - 53 db(A)	470 m³/h - 60 db(A)	680 m³/h - 67 db(A)	---
Open Suite	**	335 m³/h - 63 db(A)	395 m³/h - 66 db(A)	445 m³/h - 69 db(A)	---	500 m³/h - 71 db(A)
Plat	A	160 m³/h - 37 db(A)	315 m³/h - 50 db(A)	420 m³/h - 57 db(A)	---	710 m³/h - 69 db(A)
Rules	A	160 m³/h - 40 db(A)	330 m³/h - 53 db(A)	415 m³/h - 58 db(A)	---	700 m³/h - 71 db(A)
Shire	A	275 m³/h - 52 db(A)	495 m³/h - 64 db(A)	---	---	650 m³/h - 71 db(A)
Shy-S	A	275 m³/h - 52 db(A)	385 m³/h - 59 db(A)	495 m³/h - 65 db(A)	---	650 m³/h - 71 db(A)
Spot NG	D	195 m³/h - 55 db(A)	224 m³/h - 56 db(A)	368 m³/h - 62 db(A)	---	---
Spot Urban	B	270 m³/h - 52 db(A)	375 m³/h - 59 db(A)	630 m³/h - 71 db(A)	---	---
Stone	C	240 m³/h - 44 db(A)	368 m³/h - 53 db(A)	559 m³/h - 67 db(A)	---	---
Stripe	B	304 m³/h - 50 db(A)	432 m³/h - 58 db(A)	603 m³/h - 65 db(A)	---	757 m³/h - 69 db(A)
Super Plat	A++	190 m³/h - 45 db(A)	310 m³/h - 47 db(A)	455 m³/h - 56 db(A)	700 m³/h - 67 db(A)	---
Sweet	A	230 m³/h - 46 db(A)	335 m³/h - 54 db(A)	465 m³/h - 61 db(A)	---	580 m³/h - 66 db(A)
Tamaya Rail	D	290 m³/h - 56 db(A)	375 m³/h - 61 db(A)	435 m³/h - 65 db(A)	---	---
Tonda	D	265 m³/h - 60 db(A)	325 m³/h - 65 db(A)	355 m³/h - 67 db(A)	---	---
Tube Pro	C	240 m³/h - 47 db(A)	368 m³/h - 56 db(A)	603 m³/h - 68 db(A)	---	---

4.1

Approfondimenti.
Learn more.

	AIR OUTLET	REDUCTION 150/125	ODOUR FIL- TER ALERT	GREASE FIL- TER ALERT	NON-RETURN VALVE
Acuta	Ø150	---	■	■	■
Adèle	Ø150	■	■	■	■
Aplomb	Ø150	---	■	■	■
Berlin	Ø150	■	---	---	■
Bio	Ø150	---	■	■	■
Bloom	Ø150	---	■	■	■
Bloom-S	Ø150	---	■	■	■
Circus	Ø150	■	---	---	---
Coraline	Ø150	■	---	---	---
Element	Ø150	■	■	■	■
Emerald	Ø150	■	---	---	---
Flat Glass	Ø150	■	---	---	■
Haiku	Ø150	■	■	■	■
Haiku Dry	Ø150	■	■	■	■
Joy	Ø150	■	■	■	---
Just Dry	Ø150	---	■	■	---
L'Essenza	Ø150	---	■	■	■
Lo1	Ø150	---	■	■	■
Majestic	Ø150	---	■	■	■
Majestic No Drip	Ø150	---	■	■	■
Missy	Ø150	---	---	---	■
Neat	Ø150	---	■	■	---
Nuage	Ø150	---	■	■	---
Om Air	Ø150	---	■	■	---

	AIR OUTLET	REDUCTION 150/125	ODOUR FIL- TER ALERT	GREASE FIL- TER ALERT	NON-RETURN VALVE
Open Suite	Ø150	---	■	■	---
Plat	Ø150	---	■	■	---
Rules	Ø150	---	■	■	■
Shire	Ø150	---	■	■	■
Shy-S	Ø150	---	■	■	■
Spot NG	Ø150	■	---	---	---
Spot Urban	Ø150	■	---	---	■
Stone	Ø150	---	---	---	---
Stripe	Ø150	---	■	■	■
Super Plat	Ø150	---	■	■	---
Sweet Duct-out	Ø150	■	■	■	■
Sweet Filtering	Ø150	---	■	■	■
Tamaya Rail	Ø150	---	---	---	■
Tonda	Ø150	■	---	---	---
Tube Pro	Ø150	---	---	---	■